


High Pressure Internal Gear Pumps Series QX

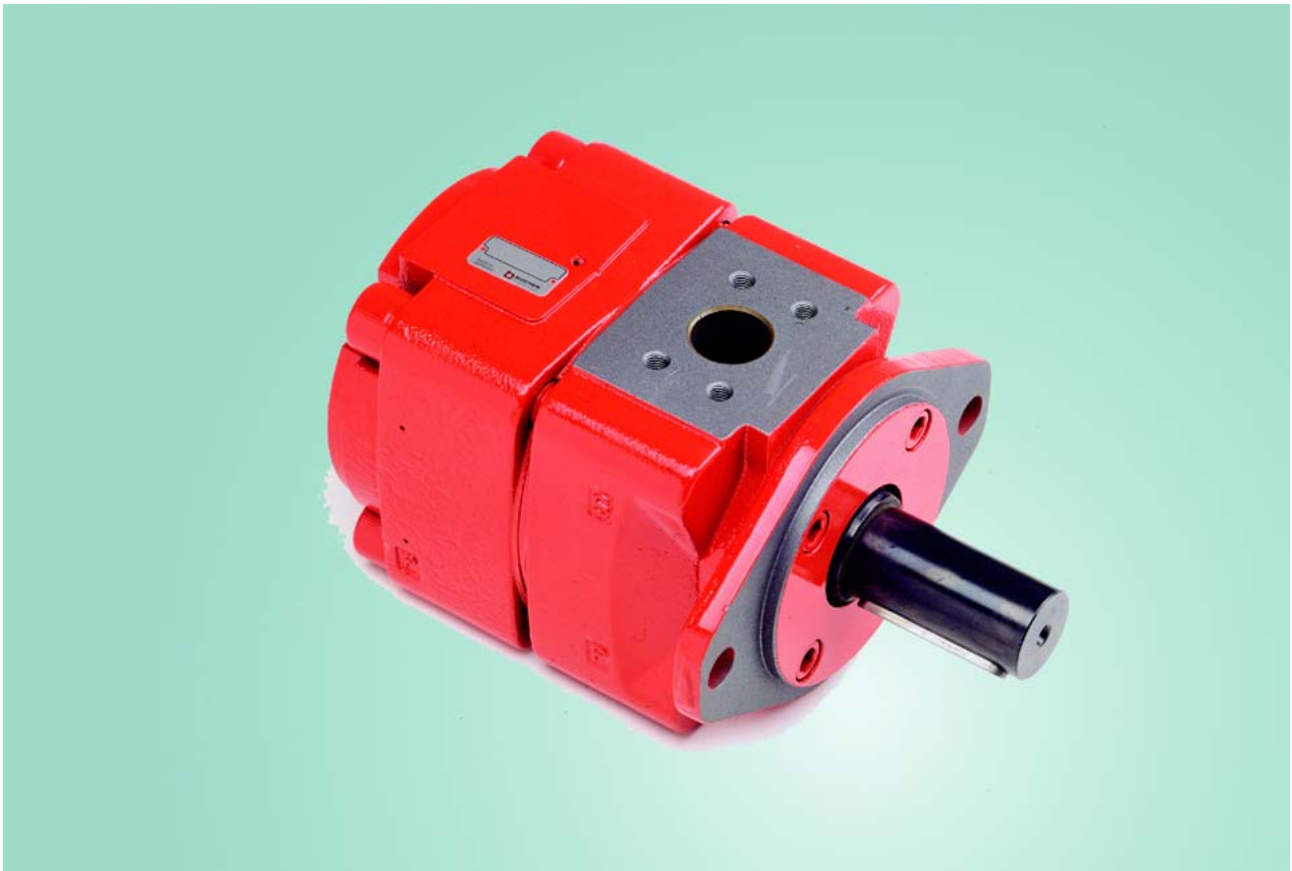

motion and progress

Contents

1 General	
1.1 Product description	3
1.2 Advantages	3
2 Technical data	
2.1 General	3
2.2 Main characteristics for pressure range 1	4
2.3 Main characteristics for pressure range 2	5
2.4 Main characteristics for pressure range 3	5
3 Performance graphs	
3.1 Noise level	6
3.2 Efficiency	6-7
3.3 Operation with variable-speed drives	8-9
4 Single pumps	
4.1 Dimensions	10
4.2 Pressure range 1	11
4.3 Pressure range 2	11
4.4 Pressure range 3	11
4.5 Ordering code for single pumps	12
4.6 Standard configuration	12
4.7 Special features	12
5 Double pumps	
5.1 Selection table	13
5.2 Dimensions	14-22
5.3 Ordering code for double pumps	23
6 Triple pumps	
6.1 Selection table	24
6.2 Ordering code for triple pumps	25
7 Pressure-holding pumps	
7.1 Generals	26
7.2 Technical data	26
7.3 Main characteristics	26
7.4 Characteristic curves / Efficiency	27
7.5 Single pumps	27
7.6 Pressure-holding pump compined also QX-pump	28
8 Fluid cleanliness	29
9 Note	29
10 Accessories	
10.1 Bolt-on valves - SAE 3000 pattern	30
10.2 Pipe flanges - high pressure type for up to 420 bar - SAE 3000 pattern	30
10.3 Pipe flanges - low pressure type for up to 16 bar - SAE 3000 pattern	31

1 General

1.1 Product description

The QX pumps are the 5th generation of Bucher internal gear pumps, which have proven themselves in thirty years of service around the world. Numerous improvements have been made to the straightforward and robust design.

Advances in the manufacturing process have made it possible - without making higher demands on individual components - to build pumps that are considerably lighter and more compact.

A new tooth profile, conceived and optimised with the help of CAE, has yielded another significant reduction in noise levels. Large sealing areas result in higher efficiencies.

The internal gear ring is supported by a hydrodynamic/ hydrostatic lubricating film, which allows operation at low viscosities or low and high speeds. QX pumps are therefore suitable for use with variable-speed drives, where they can provide variable deliveries.

1.2 Advantages

- High pressures
- Low noise level
- Long service life
- Negligible flow- and pressure-pulsations
- Can be used with fire-resistant fluids (HFB, HFC and HFD = QXV), fuels, biodegradable and low-viscosity fluids
- Insensitive to contamination of the fluid

2 Technical data

2.1 General

Installation attitude	unrestricted
Mounting method (standard)	oval 2-hole flange to ISO 3019/1 (SAE): QX 3-6 oval 2-hole flange to ISO 3019/2 (metric) QX 2+8
Direction of rotation	right, alternatively left (but not reversible)
Pump drive method	in-line, through a flexible coupling
Volumetric efficiency η_v	better than 95%
Fluids	HLP mineral oils to DIN 51524, Part 2 HFC fluids to VDMA 24317 other fluids - contact Bucher Hydraulics
Minimum fluid cleanliness	NAS 1638, Class 9 or ISO 4406, code 20/18/15
Viscosity range	10 ... 300 mm ² /s (cSt) (for values outside this range, contact Bucher Hydraulics)
Fluid temperature range	HLP-mineral oils - 80°C max. HFC 50°C max.
Inlet pressure	maximum minimum
Approach against pressure	maximum 20 bar (higher values, contact Bucher Hydraulics)

2.2 Main characteristics for pressure range 1

Effective displacement	Flow rate ¹⁾	Maximum speed	Type	Pressure range 1		Torque ³⁾	Power requirement ⁴⁾
				Mineral oil to DIN 51524 Continuous/Max. interm. press. ²⁾	HFC to VDMA 24317		
cm ³ /rev	l/min	rpm		bar	bar	Nm	kW
10,3 12,6 15,9	14,9 18,3 23,0	4500 4000 3600	QX21-010 QX21-012 QX21-016	160/210 125/160 100/125	130/180 100/135 80/100	26 25 25	4,0 3,8 3,9
20,0 25,3 31,2	29,0 36,7 45,2	3600 3250 3000	QX31-020 QX31-025 QX31-032	160/210 125/160 100/125	130/180 100/135 80/100	51 50 50	7,7 7,7 7,5
40,7 50,3 64,7	59,0 72,9 93,8	3000 2600 2300	QX41-040 QX41-050 QX41-063	160/210 125/160 100/125	130/180 100/135 80/100	104 100 103	15,7 15,2 15,6
78,6 101,1 127,3	114 146 184	2300 2100 1800 ⁵⁾	QX51-080 QX51-100 QX51-125	160/210 125/160 100/125	130/180 100/135 80/100	200 201 203	30,4 30,5 30,8
160,5 202,1 249,7	232 293 362	1800 ⁶⁾ 1800 ⁶⁾ 1800 ⁶⁾	QX61-160 QX61-200 QX61-250	160/210 125/160 100/125	130/180 100/135 80/100	409 402 397	62,0 61,0 60,4
326,0 402,6 498,5	472 583 722	1750 ⁶⁾ 1750 ⁶⁾ 1500 ⁶⁾	QX81-315 QX81-400 QX81-500	160/210 125/160 100/125	130/180 100/135 80/100	830 801 793	126,0 121,6 120,5

2.2.1 Suction arrangements for pump types QX61 and QX81

Minimum inlet pressure is 0.85 bar absolute with viscosity 10... 300 mm²/s

	Speed 1500 rpm Suction height		Speed 1800 rpm Suction height	
	up to 150 mm	over 150 mm	up to 150 mm	over 150 mm
QX61-160	I	I	I	II
QX61-200	I	I	I	II
QX61-250	I	II	II	II
QX81-315	I	II	II	II
QX81-400	II	II	II	-
QX81-500	II	II	-	-

I = standard pump with one suction port

II = model with two suction ports

All pump types coded II can be used without the second suction port up to 1200 rpm

2.3 Main characteristics for pressure range 2

Effective displacement	Flow rate ¹⁾	Maximum speed	Type	Pressure range 2		Torque ³⁾	Power requirement ⁴⁾
				Mineral oil to DIN 51524 Continuous/Max.	HFC to VDMA 24317 interm. press. ²⁾		
cm ³ /rev	l/min	rpm		bar	bar	Nm	kW
5,1 6,3 8,0	7,4 9,1 11,5	5000	QX22-005 QX22-006 QX22-008	210 / 250	180 / 210	17 21 27	2,6 3,2 4,0
10,0 12,6 15,6	14,5 18,3 22,6	4300	QX32-010 QX32-012 QX32-016	210 / 250	180 / 210	34 42 52	5,1 6,4 7,9
20,4 25,1 32,4	29,5 36,4 46,8	3600	QX42-020 QX42-025 QX42-032	210 / 250	180 / 210	68 84 108	10,4 12,7 16,5
39,3 50,6 63,7	56,9 73,2 92,1	3000	QX52-040 QX52-050 QX52-063	210 / 250	180 / 210	132 170 213	19,9 25,7 32,3
80,2 101,0 124,8	116 146 181	2500 ⁷⁾ 2300 ⁷⁾ 2000 ⁷⁾	QX62-080 QX62-100 QX62-125	210 / 250	180 / 210	268 338 417	40,7 51,2 63,4
163,0 201,3 249,2	236 291 361	1800 ⁷⁾ 1750 ⁷⁾ 1500 ⁷⁾	QX82-160 QX82-200 QX82-250	210 / 250	180 / 210	544 672 833	82,7 102,1 126,5

2.4 Main characteristics for pressure range 3

Effective displacement	Flow rate ¹⁾	Maximum speed	Type	Pressure range 3		Torque ³⁾	Power requirement ⁴⁾
				Mineral oil to DIN 51524 Continuous/Max.	HFC to VDMA 24317 interm. press. ²⁾		
cm ³ /rev	l/min	rpm		bar	bar	Nm	kW
5,1 6,3 8,0	7,4 9,1 11,5	5000	QX23-005 QX23-006 QX23-008	320 / 400	280 / 350	26 32 41	4,0 4,9 6,2
10,0 12,6 15,6	14,5 18,3 22,6	4300	QX33-010 QX33-012 QX33-016	320 / 400	280 / 350	51 64 80	7,7 9,7 12,1
20,4 25,1 32,4	29,5 36,4 46,8	3600	QX43-020 QX43-025 QX43-032	320 / 400	280 / 350	104 128 165	15,8 19,4 25,0
39,3 50,6 63,7	56,9 73,2 92,1	3000	QX53-040 QX53-050 QX53-063	320 / 400	280 / 350	200 258 321	30,4 39,1 49,3
80,2 101,0 124,8	116 146 181	2500 ⁷⁾ 2300 ⁷⁾ 2000 ⁷⁾	QX63-080 QX63-100 QX63-125	320 / 400	280 / 350	409 514 636	62,0 78,1 96,5
163,0 201,3 249,2	236 291 361	1800 ⁷⁾ 1750 ⁷⁾ 1500 ⁷⁾	QX83-160 QX83-200 QX83-250	320 / 400	280 / 350	830 1025 1270	126,0 155,7 192,7

The operating data are valid for hydraulic oils as well as fire-resistant and environmentally-friendly fluids with a viscosity of 42 mm²/s


- 1) at speed n = 1450 rpm
- 2) maximum intermittent pressure for max. 20 sec. and not more than 10% of the duty cycle
- 3) theoretical value at the max. permitted continuous pressure for mineral oil
- 4) theoretical value at the max. permitted continuous pressure for mineral oil at n = 1450 rpm
- 5) for speeds higher than 1500 rpm, the minimum permissible inlet pressure is 0.95 bar absolute
- 6) max. speed only possible with second suction port, see section 2.2.1, page 4
- 7) for max. speed minimum permissible inlet pressure is 0.95 bar absolute, for speeds higher contact Bucher Hydraulics

3 Performance graphs

The performance graphs shown are valid for the specified pump models.
For other pump sizes, contact Bucher Hydraulics.

3.1 Noise level



measured to DIN 45635, Part 26, in
Stuttgart University's low-echo noise
measurement chamber;
measurement distance 1 m;
speed $n = 1500$ rpm
viscosity = $42 \text{ mm}^2/\text{s}$

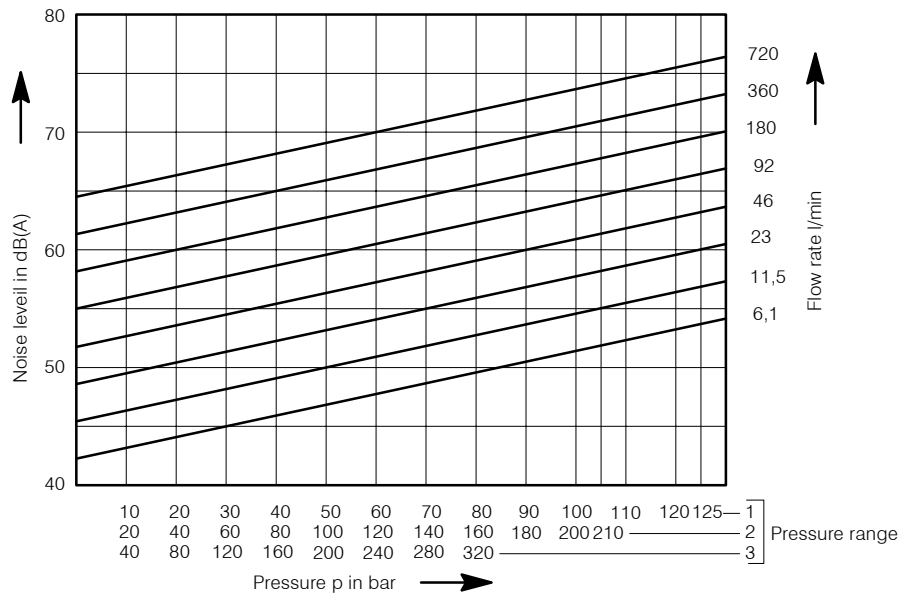

3.2 Efficiency

3.2.1 Pressure range 1



measured at speed 1450 rpm
viscosity $42 \text{ mm}^2/\text{s}$

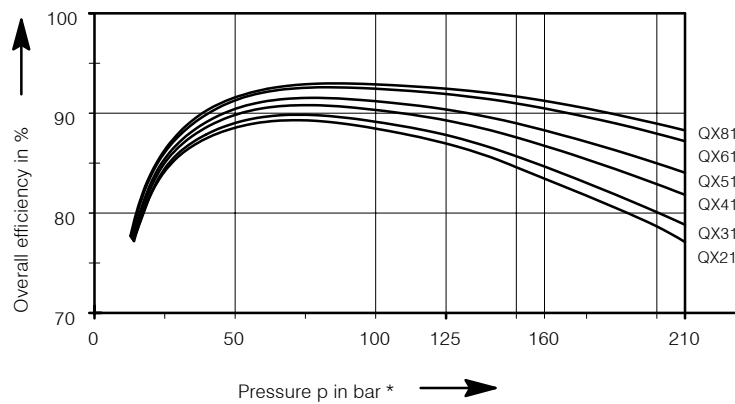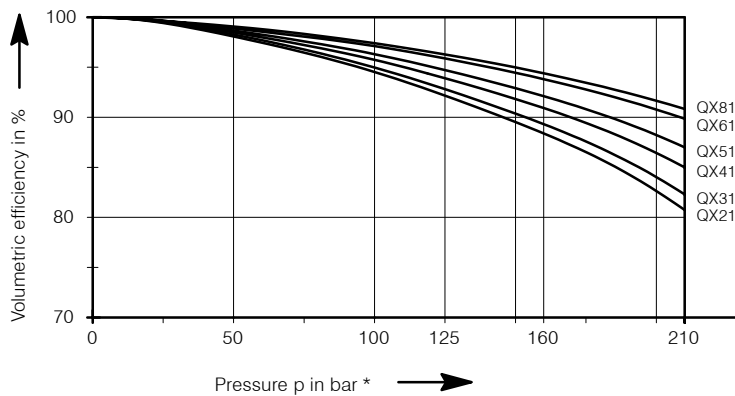

* Cont.-/Intern. pressure see page 4 (2.2)



3.2.2 Pressure range 2

measured at speed 1450 rpm
viscosity 42 mm²/s
solid line = continuous pressure
dashed line = maximum intermittent pressure

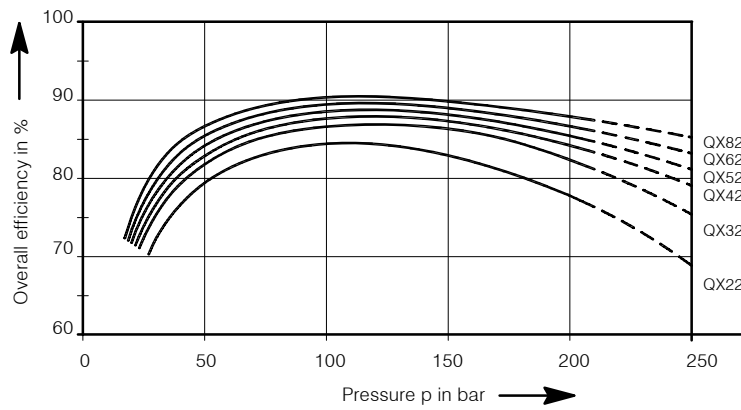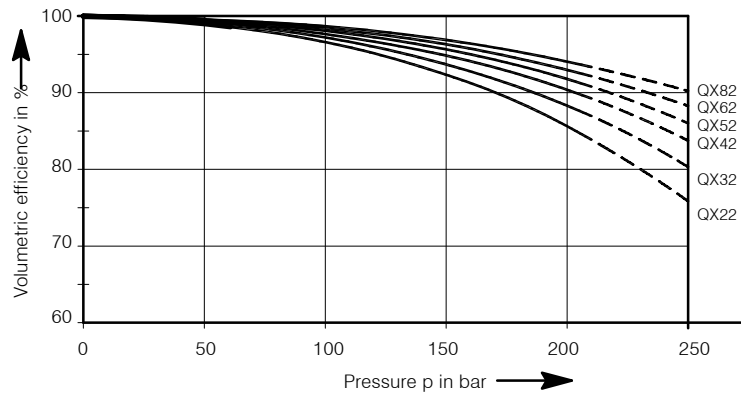

3.2.3 Pressure range 3


measured at speed 1450 rpm
viscosity 42 mm²/s
solid line = continuous pressure
dashed line = maximum intermittent pressure

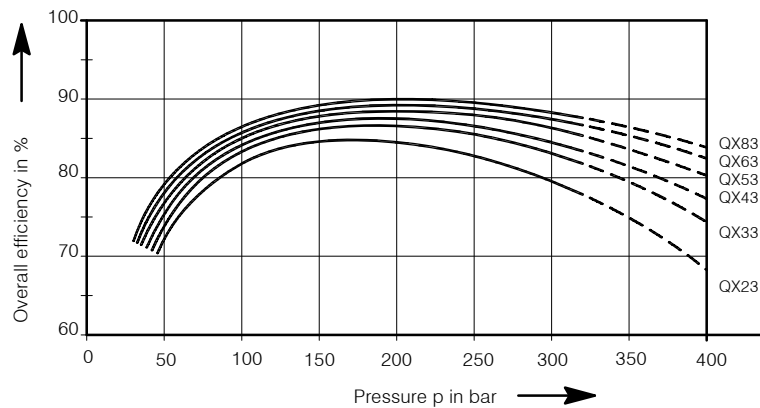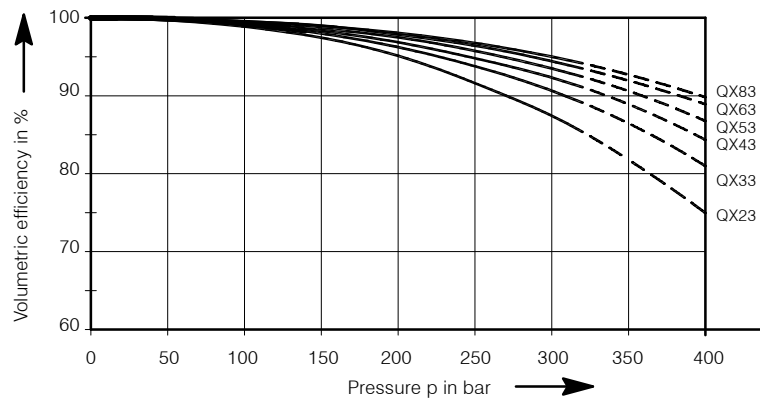

3.3 Operation with variable-speed drives


3.3.1 Minimum speed as a function of pressure

Pump QX52-063 measured:
with viscosity 42 mm²/s

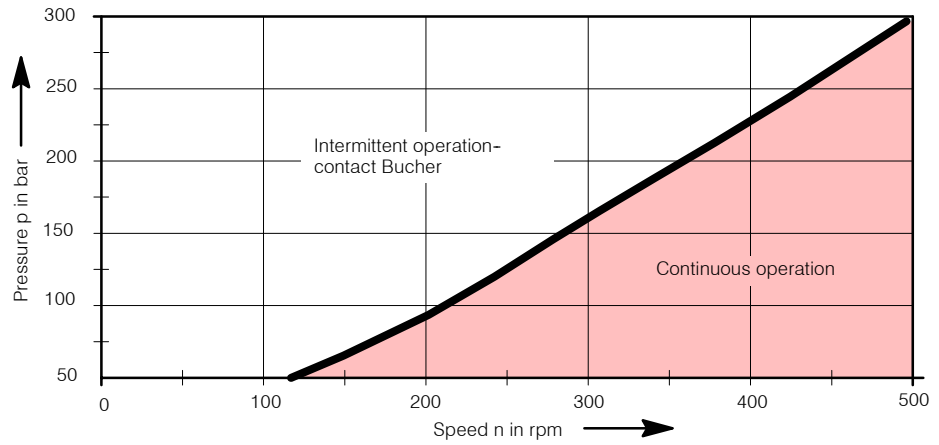


3.3.2 Minimum pressure at suction port as a function of speed

Pump QX52-063 measured:
with viscosity 42 mm²/s

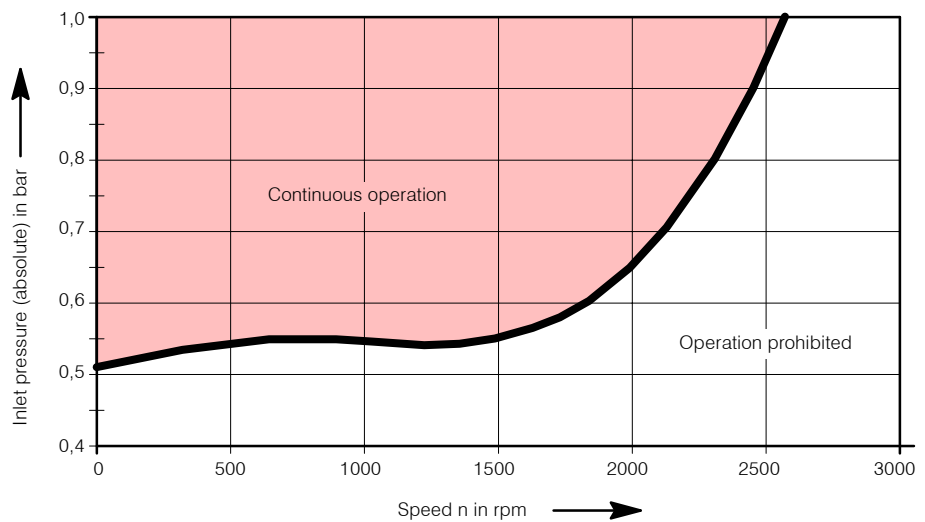

3.3.3 Typical loading cycle for a QX pump with variable-speed drive

Pump QX53-063 with separate drain connection
measured with: viscosity 20 mm²/s

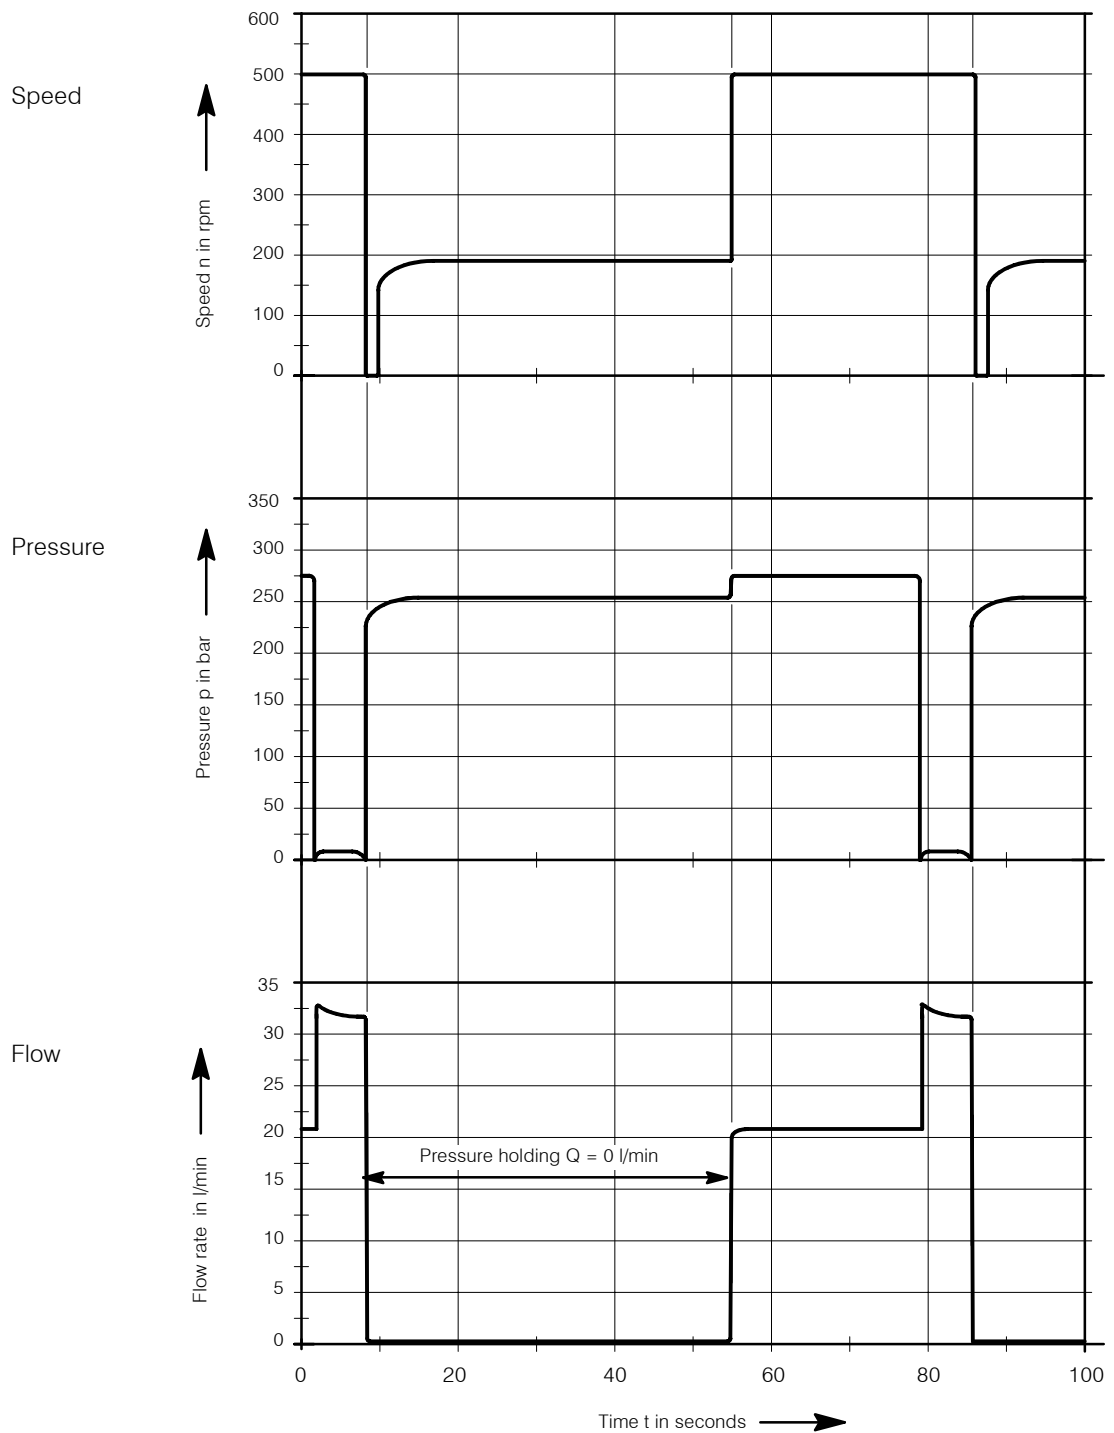

4 Single pumps

4.1 Dimensions

Frame size		2			3			4			5			6			8		
Pressure range		1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
Suction port: to standard SAE J518 ⁸⁾	S	G1" ¹⁰⁾ thread			G1 1/4" ¹⁰⁾ thread			1 1/2"			2"			2 1/2"			3"		
Pressure port: to standard SAE J518 ⁸⁾	P	G1/2" ¹⁰⁾ ¹¹⁾ thread			G3/4" ¹⁰⁾ ¹¹⁾ thread			1"			1 1/4"			1 1/2"			2"		
Mounting: oval 2-hole- flange to ISO 3019/1 (SAE) ISO 3019/2 (metric)	A	118			132			170			212			267			330		
	B (SAE)	-			106			146			181			229			-		
	B (Metr.)	100			109			140			180			224			280		
	C	9			11			14			18			22			26		
	N (SAE)	-			82,55 - 0,05			101,6 - 0,05			127 - 0,05			152,4 - 0,05			-		
	N (Metr.)	63 h8			80 h8			100 h8			125 h8			160 h8			200 h8		
	O	8,5			8,5			10,5			12,5			16,5			20		
V	6			6			7			7			7			9			
4-hole flange ISO 3019/2	X (Metr.)	9			9			12			14			18			22		
	Y (Metr.)	85			103			125			160			200			250		
Shaft end: parallel, to ISO/R775 ⁹⁾	D	20 j6			25 j6			32 j6			40 j6			50 j6			63 j6		
	E	36			42			58			82			82			105		
	F	6			8			10			12			14			18		
	G	22,5			28			35			43			53,5			67		
	I	45			50			68			92			92			117		
Housing	K	37,5			44			52,5			60,5			74			90		
	L	136	118	153	164	144	189	202	176	232	242	210	280	288	248	338	361	331	446
	M	-	55	90	-	69,5	114	-	87	143	-	102	172	-	119	209	-	151	266
	T	85			107			133			177			214			220		
	Z	50			60			62,5			78			97,5			125		
Weight	kg	5	5	6,5	10	9,5	12,5	18	17	22	33	31	40	64	60	76	130	120	160


8) for SAE 3000 pipe flange dimensions,
high pressure type up to 420 bar (see section 10.2)
low pressure type for up to 16 bar (see section 10.3)

9) for other shaft ends, contact Bucher Hydraulics


10) threaded port to DIN 3852, Part 2

11) pressure port to SAE J 518 can be supplied for pressure ranges 2+3


4.2 Pressure range 1

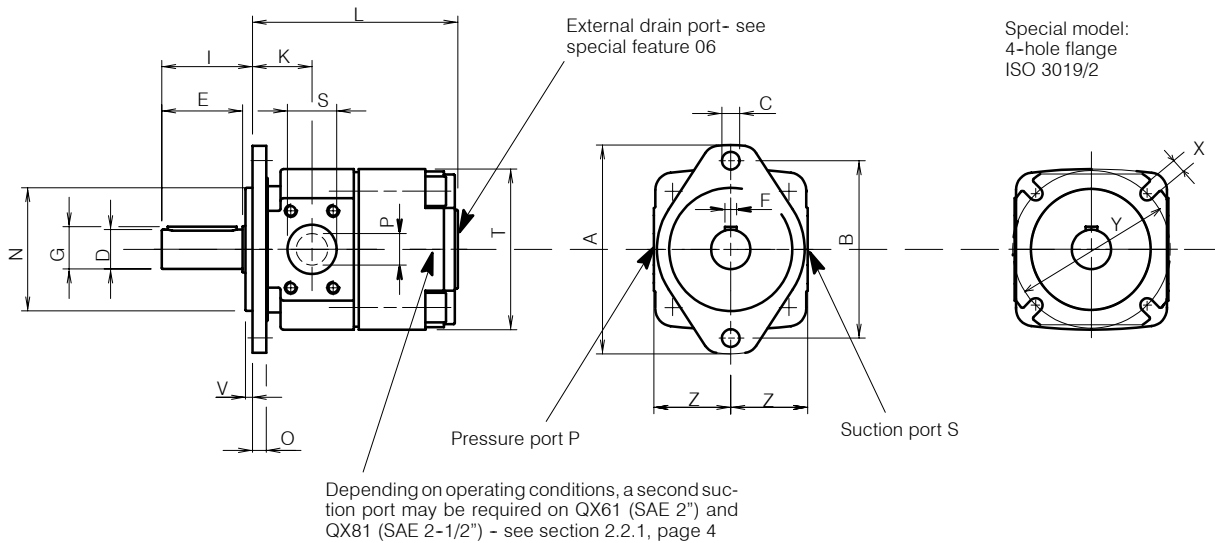


4.3 Pressure range 2

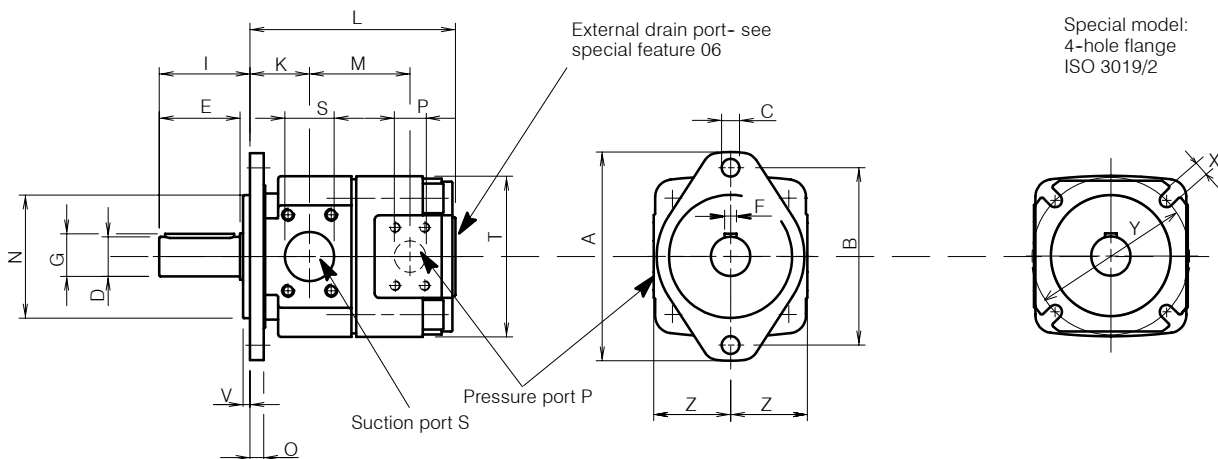

4.4 Pressure range 3

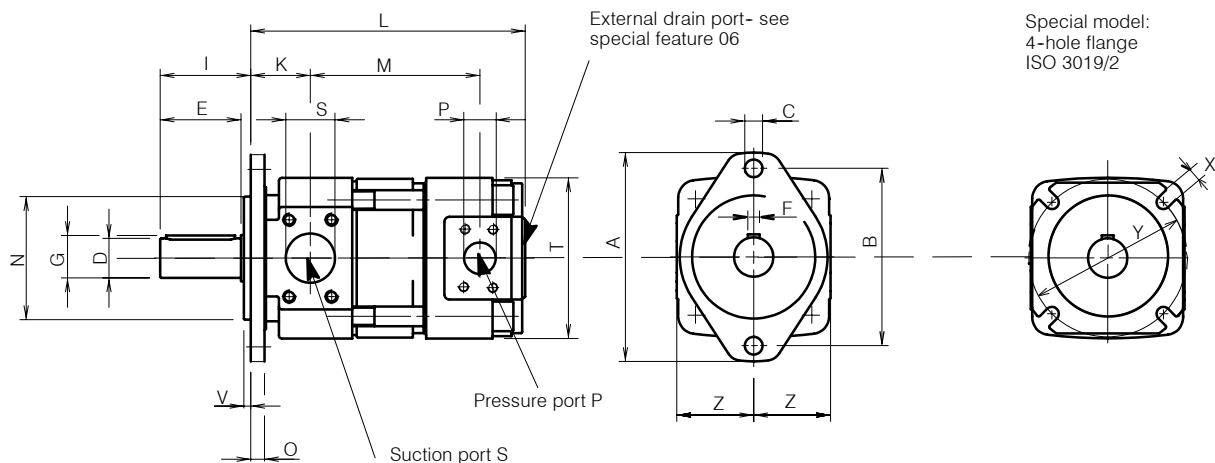

4.5 Ordering code for single pumps

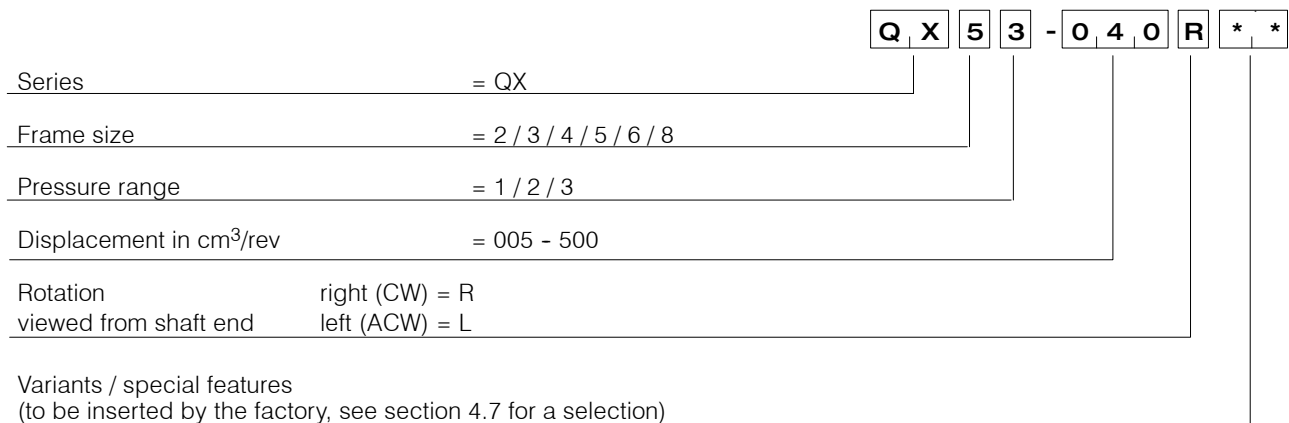

Ordering example:

Required: single pump
 Displacement: 40cm³/rev
 Continuous pressure: 300 bar
 for use with mineral oil
 Ordering code: QX53-040R

4.6 Standard configuration

- direction of rotation - right (CW)
- 2-hole mounting flange to ISO 3019/1 (SAE): sizes QX 3-6
- 2-hole mounting flange to ISO 3019/2 (metr.): sizes QX 2+8
- Nitrile seals
- parallel shaft end to ISO/R775

4.7 Special features

06 = separate drain port in the pump rear cover
 QX 2-5 G1/4"
 QX 6 G3/8"
 QX 8 G1/2"
 09 = Viton seals
 12 = 2-hole mounting flange to ISO 3019/2 (metric): size QX3-6
 66 = 4-hole mounting flange to ISO 3019/2 (metric)
 14 = operating temperatures to 160°C
 29 = for HFB and HFC fluids, frame sizes 2 - 5
 86 = for HFB and HFC fluids, frame sizes 6 + 8
 83 = second suction port on:
 QX61 = SAE 2"
 QX81 = SAE 2 1/2"

5 Double pumps

QX double pumps consist of two single pumps mounted on a common drive shaft. Hydraulically, the two pumps operate independently of one another but they share a common suction port in the pump's centre section. The larger pump of the combination is situated at

the shaft end (the drive side) and is referred to as Pump I. With equal frame sizes, the pump with the larger displacement is situated at the drive side.

Double pumps can be combined as shown in the following table. If a letter is


shown at the intersection point of the two pumps, the letter identifies the page in section 5.2 that contains the relevant dimensional drawing. If there is no letter at the intersection point, then that pump combination is not possible.

5.1 Selection table

Pump 1		Pump 2																Maximum permissible drive shaft torque (Nm)				
		Displacement in cm ³ /rev																				
		5/6/8		10/12/16		20/25/32		40/50/63		80/100/125		160/200/250		315	400	500						
Displacement in cm ³ /rev		Maximum intermittent pressure in bar																				
		250	400	125/160/210	250	400	125/160/210	250	400	125/160/210	250	400	125/160/210	250	400	125/160/210	250	400	125/160/210			
		QX22...	QX23...	QX21...	QX32...	QX33...	QX31...	QX42...	QX43...	QX41...	QX52...	QX53...	QX51...	QX62...	QX63...	QX61...	QX82...	QX83...	QX81...			
Pump 1	5/6/8	250	QX22..	E																65		
		400	QX23..	H	I																	
	10/12/16	125/160/210	QX21..	B	C	A															130	
		250	QX32..	E	F	D	E															
	20/25/32	400	QX33..	H	I	G	H	I													260	
		125/160/210	QX31..	B	C	A	B	C	A													
	40/50/63	250	QX42..	E	F	D	E	F	D	E											520	
		400	QX43..	H	I	G	H	I	G	H	I											
	80/100/125	125/160/210	QX41..	B	C	A	B	C	A	B	C	A									1050	
		250	QX52..	E	F	D	E	F	D	E	F	D	E									
	160/200/250	400	QX53..	H	I	G	H	I	G	H	I	G	H	I							2100	
		125/160/210	QX51..	B	C	A	B	C	A	B	C	A	B	C	A							
	315	400	500	250	QX62..				E	F	D	E	F	D	E							
				400	QX63..				H	I	G	H	I	G	H	I	G	H	I			
	160/200/250	125/160/210	250	400	QX61..				B	C	A	B	C	A	B	C	A					
				400	QX82..								E	F	D	E	F	D	E	F	D	E
	315	400	500	125/160/210	400	QX83..						H	I	G	H	I	G	H	I	G	H	I
					400	QX81..								B	C	A	B	C	A	B	C	A

5.2 Dimensions

A Double pump QX.1/1

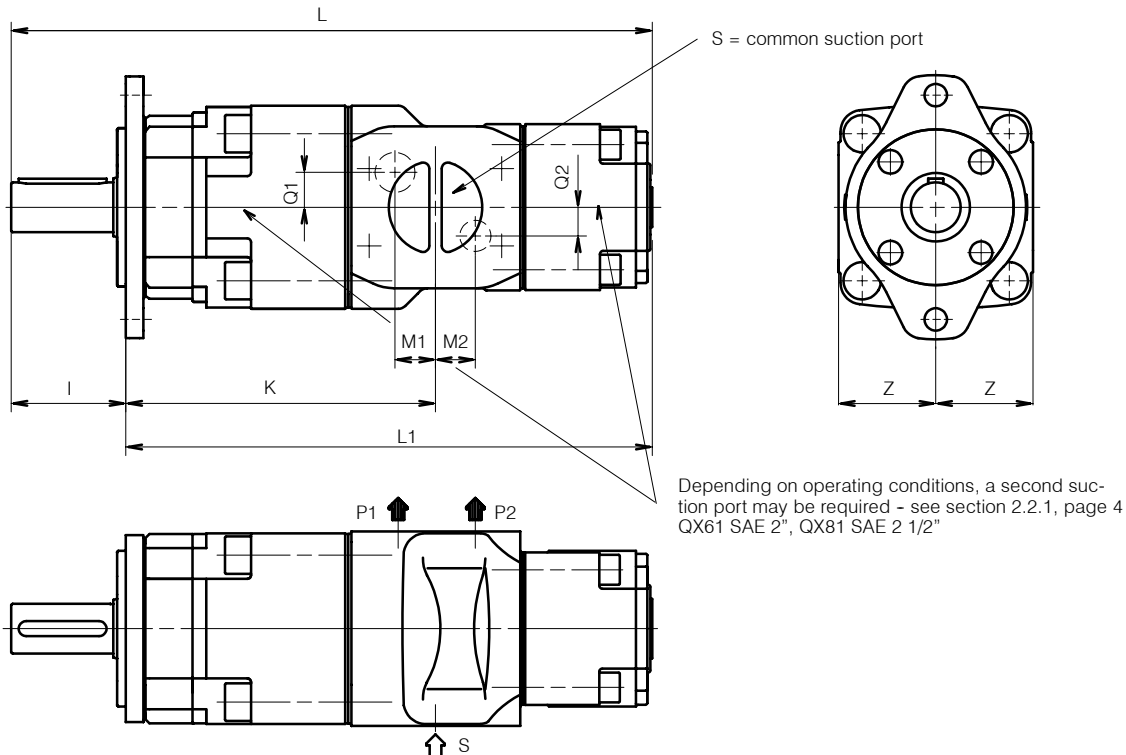


Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	Q1	Q2	I	Z	S	P1	P2
QX21/21	296	251	141	18	18	-	-	45	50	G 1 1/4" ¹⁾	G 1/2" ^{1) 2)}	G 1/2" ^{1) 2)}
QX31/21	343	293	171	26	30			50	60	G 1 1/2" ¹⁾	G 3/4" ^{1) 2)}	
QX31/31	358	308			201	20	26	15	15	68	63	SAE 2"
QX41/21	396	328	35	23			23					
QX41/31	411	343	208	28	28	23	23	92	78	SAE 2 1/2"	SAE 1 1/4"	G 1/2" ^{1) 2)}
QX51/21	468	376										241
QX51/31	483	391	249	30	30	28	28	SAE 3"	SAE 1 1/2"	SAE 1"		
QX51/41	521	429								287	24	47
QX51/51	547	455	292	27	39	26	27	SAE 3 1/2"	SAE 2"			
QX61/31	541	449								359	35	51
QX61/41	564	472	38	45	47	25	30	SAE 4"	SAE 2"			
QX61/51	601	509								38	45	47
QX61/61	628	536	38	45	47	25	30	SAE 4"	SAE 2"			
QX81/41	679	562								38	45	47
QX81/51	705	588	38	45	47	25	30	SAE 4"	SAE 2"			
QX81/61	732	615								38	45	47
QX81/81	774	657	38	45	47	25	30	SAE 4"	SAE 2"			

1) threaded port to DIN 3852, Part 2

2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

B Double pump QX.1/2

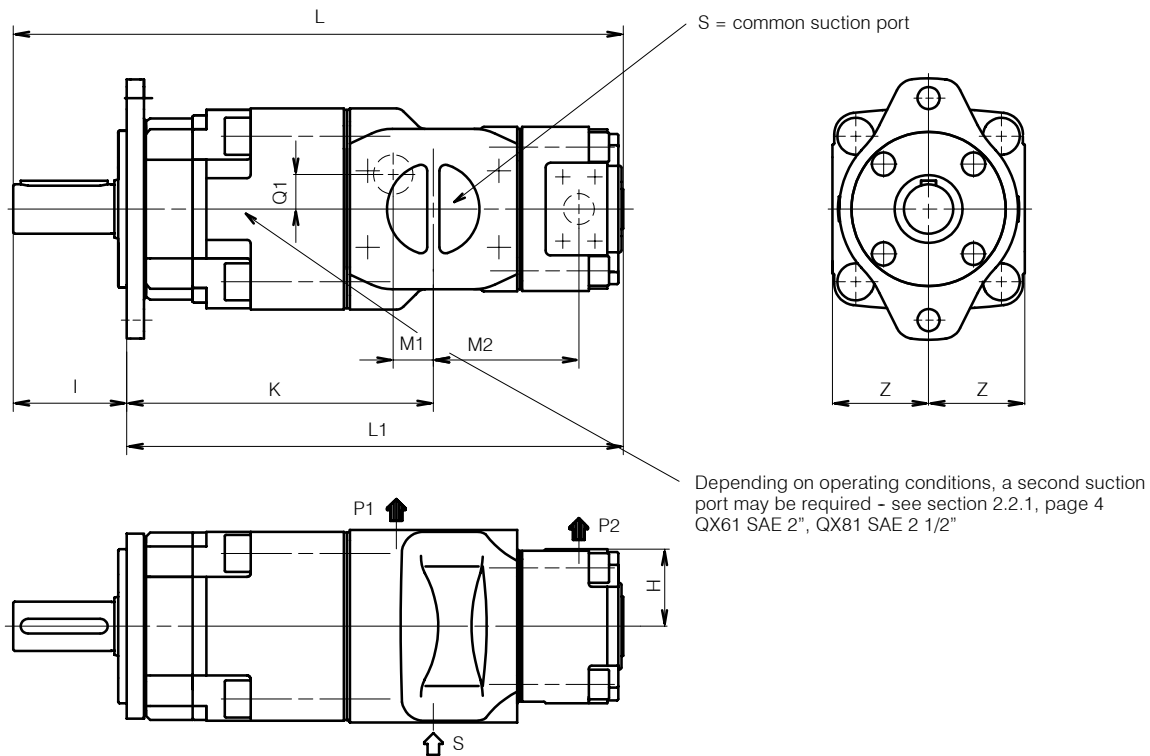


Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	Q1	I	Z	H	S	P1	P2	
QX21/22	278	233	141	18	67	-	45	50	50	G 1 1/4" 1)	G 1/2" 1) 2)	G 1/2" 1) 2)	
QX31/22	325	275	171	26	79		50	60	60	G 1 1/2" 1)	G 3/4" 1) 2)	G 3/4" 1) 2)	
QX31/32	338	288		87	20	84	15	68	63	50	SAE 2"	SAE 1"	G 1/2" 1) 2)
QX41/22	378	310	201	92		60	63	60	63	G 3/4" 1) 2)			
QX41/32	391	323	208	28		111	23	92	78	50	SAE 2 1/2"	SAE 1 1/4"	G 1/2" 1) 2)
QX41/42	423	355	241	23		92	15		60	60			G 3/4" 1) 2)
QX51/22	450	358	249	30	118	28	92	78	63	SAE 3"	SAE 1 1/4"	SAE 1"	
QX51/32	463	371			100			78	78			78	SAE 1 1/4"
QX51/42	495	403		127	92	98	98	60	63	SAE 1 1/2"	SAE 1"	G 3/4" 1) 2)	
QX51/52	515	423		287		24		112	17			60	63
QX61/32	521	429	292	32	137	35	92	98	78	SAE 3 1/2"	SAE 1 1/2"	SAE 1 1/4"	
QX61/42	538	446			149			98	98			98	SAE 1 1/2"
QX61/52	569	477		35	141	25	117	125	63	SAE 2"	SAE 2"	SAE 1"	
QX61/62	588	496		38	150				78			78	SAE 1 1/4"
QX81/42	653	536	359	38	162	40	117	125	98	SAE 4"	SAE 2"	SAE 1 1/2"	
QX81/52	673	556			179				125			125	125
QX81/62	692	575		359	38	179	40	117	125	SAE 4"	SAE 2"	SAE 2"	SAE 2"
QX81/82	724	607											179

1) threaded port to DIN 3852, Part 2

2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

C Double pump QX.1/3

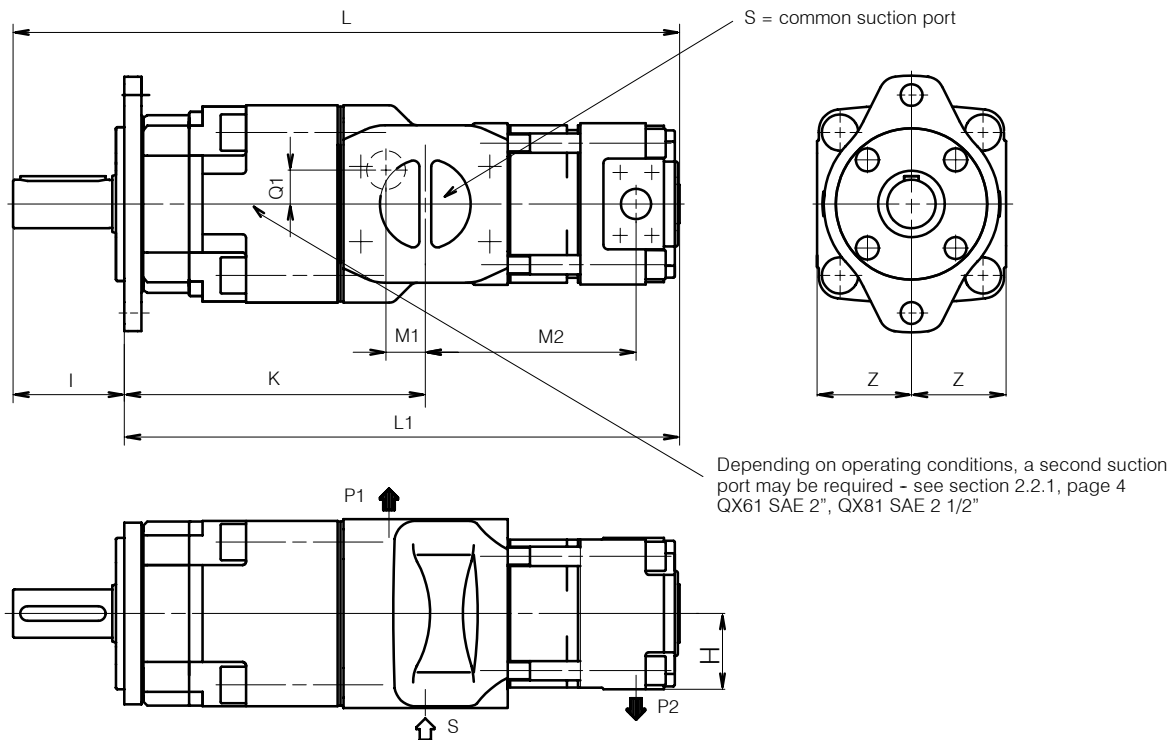


Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	Q1	I	Z	H	S	P1	P2
QX21/23	313	268	141	18	102	-	45	50	50	G 1 1/4" ¹⁾	G 1/2" ¹⁾ ₂₎	G 1/2" ¹⁾ 2)
QX31/23	360	310	171	26	114	-	50	60	60	G 1 1/2" ¹⁾	G 3/4" ¹⁾ ₂₎	G 3/4" ¹⁾ 2)
QX31/33	383	333			132							
QX41/23	413	345	201	20	119	15	68	63	50	SAE 2"	SAE 1"	G 1/2" ¹⁾ 2)
QX41/33	436	368			137							G 3/4" ¹⁾ 2)
QX41/43	479	411	208	28	167	23	92	78	63	SAE 2 1/2"	SAE 1 1/4"	SAE 1"
QX51/23	485	393	241	23	127	15						50
QX51/33	508	416			145		G 3/4" ¹⁾ 2)					
QX51/43	551	459	249	30	174	28	92	78	63	SAE 3"	SAE 1 1/4"	SAE 1"
QX51/53	585	493			197							SAE 1 1/4"
QX61/33	566	474	287	24	157	17	92	98	60	SAE 3 1/2"	SAE 1 1/2"	G 3/4" ¹⁾ 2)
QX61/43	594	502		27	179	26						63
QX61/53	637	545	292	32	207	35	92	98	78	SAE 3 1/2"	SAE 1 1/2"	SAE 1 1/4"
QX61/63	678	586			239							SAE 1 1/2"
QX81/43	709	592	359	35	197	25	117	125	63	SAE 2"	SAE 2"	SAE 1"
QX81/53	743	626			220							SAE 1 1/4"
QX81/63	782	665	38	38	252	40	117	125	98	SAE 4"	SAE 2"	SAE 1 1/2"
QX81/83	839	722			294							SAE 2"

1) threaded port to DIN 3852, Part 2

2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

D Double pump QX.2/1

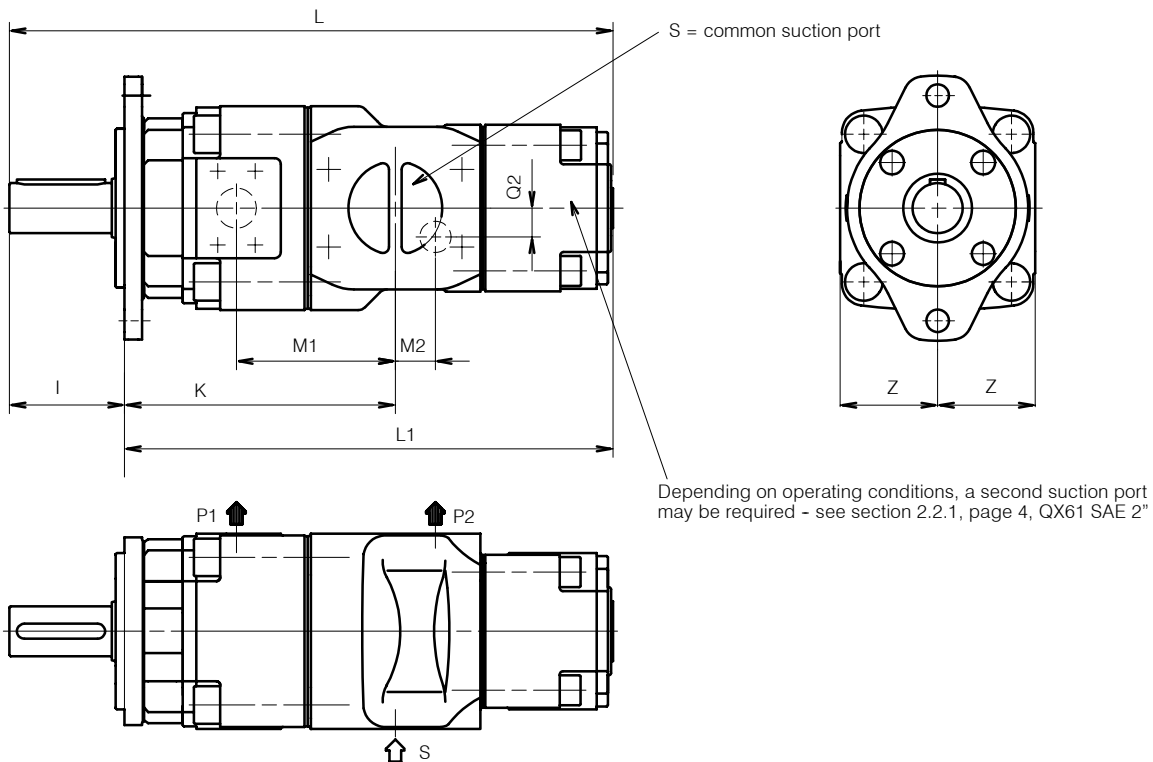


Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	Q2	I	Z	S	P1	P2
QX32/21	323	273	151	87	30	-	50	60	G 1 1/2" ¹⁾	G 3/4" ^{1) 2)}	
QX42/21	370	302	175	103	35	-	68	63	SAE 2"	SAE 1"	G 1/2" ^{1) 2)}
QX42/31	385	317			33						15
QX52/21	436	344	209	120	43	-	92	78	SAE 2 1/2"	SAE 1 1/4"	G 1/2" ^{1) 2)}
QX52/31	451	359			39						15
QX52/41	489	397	217	127	32	23	92	98	SAE 3"	SAE 1 1/2"	SAE 1"
QX62/31	501	409			47	14					G 3/4" ^{1) 2)}
QX62/41	524	432	247	144	39	27	92	98	SAE 3"	SAE 1 1/2"	SAE 1"
QX62/51	561	469			40	28					SAE 1 1/4"
QX82/41	629	512	309	179	51	25	117	125	SAE 3 1/2"	SAE 2"	SAE 1"
QX82/51	655	538			47	30					SAE 1 1/4"
QX82/61	682	565			45	35					SAE 1 1/2"

1) threaded port to DIN 3852, Part 2

2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

E Double pump QX.2/.2

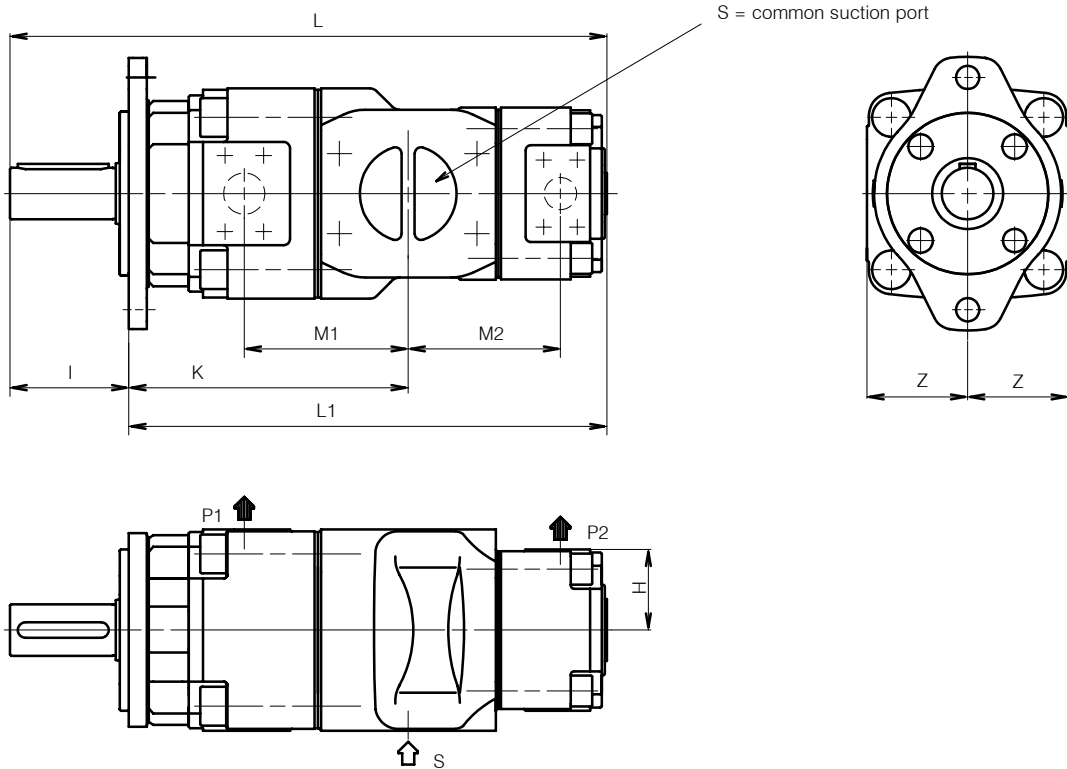


Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	I	Z	H	S	P1	P2
QX22/22	260	215	123	67	67	45	50	50	G 1 1/4" 1)	G 1/2" 1) 2)	G 1/2" 1) 2)
QX32/22	305	255	151	87	79	50	60	60	G 1 1/2" 1)	G 3/4" 1) 2)	G 3/4" 1) 2)
QX32/32	318	268			87			60			G 3/4" 1) 2)
QX42/22	352	284	175	103	84	68	63	50	SAE 2"	SAE 1"	G 1/2" 1) 2)
QX42/32	365	297			92			60			G 3/4" 1) 2)
QX42/42	397	329			111			63			SAE 1"
QX52/22	418	326	209	120	92	92	78	50	SAE 2 1/2"	SAE 1 1/4"	G 1/2" 1) 2)
QX52/32	431	339			100			60			G 3/4" 1) 2)
QX52/42	463	371			118			63			SAE 1"
QX52/52	483	391			127			78			SAE 1 1/4"
QX62/32	481	389	247	144	112	92	98	60	SAE 3"	SAE 1 1/2"	G 3/4" 1) 2)
QX62/42	498	406			123			63			SAE 1"
QX62/52	529	437			137			78			SAE 1 1/4"
QX62/62	548	456	252	149	149	92	98	98	SAE 3 1/2"	SAE 1 1/2"	SAE 1 1/2"
QX82/42	603	486			141			63			SAE 1"
QX82/52	623	506	309	179	150	117	125	78	SAE 2"	SAE 2"	SAE 1 1/4"
QX82/62	642	525			162			98			SAE 1 1/2"
QX82/82	674	557			179			125			SAE 2"

1) threaded port to DIN 3852, Part 2

2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

F Double pump QX.2/.3

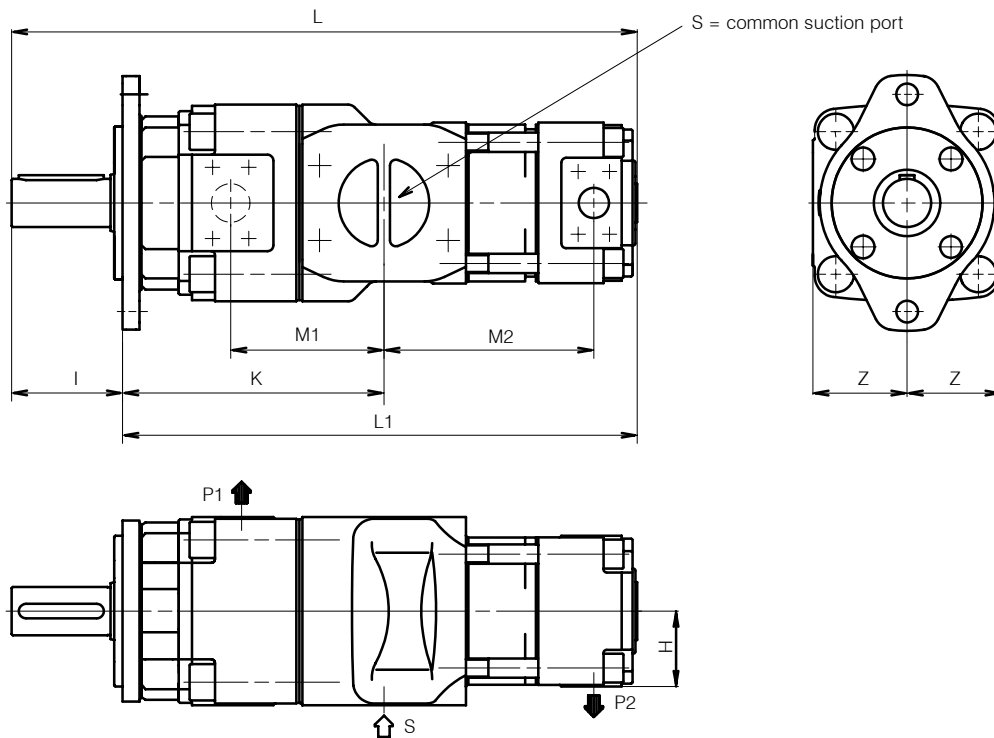


Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	I	Z	H	S	P1	P2
QX32/23	340	290	151	87	114	50	60	50	G 1 1/2" ¹⁾	G 3/4" ^{1) 2)}	G 1/2" ^{1) 2)}
QX42/23	387	319	175	103	119	68	63		60	SAE 2"	SAE 1"
QX42/33	410	342			127			92			
QX52/23	453	361	209	120	145	92	78	60	SAE 3"	SAE 1 1/2"	G 3/4" ^{1) 2)}
QX52/33	476	384			127			174			63
QX52/43	519	427	247	144	157	92	98	60	SAE 3 1/2"	SAE 2"	G 3/4" ^{1) 2)}
QX62/33	526	434			179			207			63
QX62/43	554	462	309	179	220	117	125	78	SAE 2"	SAE 2"	SAE 1 1/4"
QX62/53	599	507			252			252			98
QX82/43	659	542	309	179	197	117	125	63	SAE 2"	SAE 2"	SAE 1"
QX82/53	693	576			220			252			78
QX82/63	732	615	309	179	220	117	125	98	SAE 4"	SAE 2"	SAE 1 1/2"
					252			252			98

1) threaded port to DIN 3852, Part 2

2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

G Double pump QX.3/1

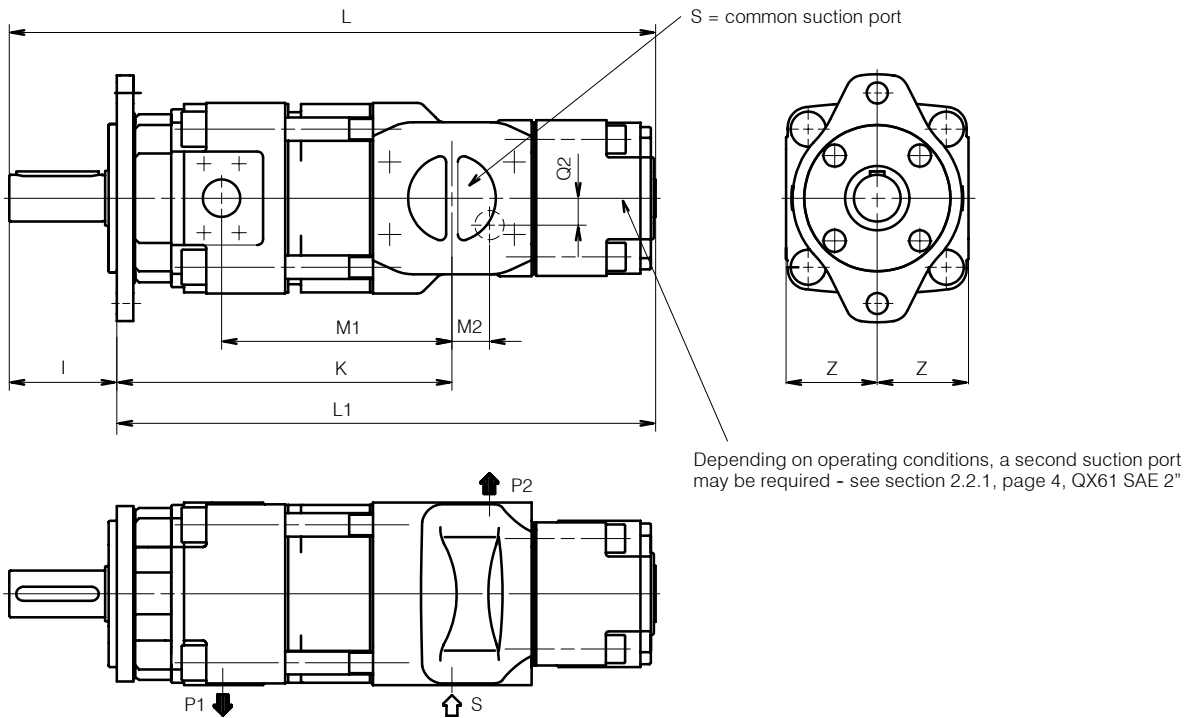


Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	Q2	I	Z	S	P1	P2
QX33/21	368	318	196	132	30	-	50	60	G 1 1/2" ¹⁾	G 3/4" ^{1) 2)}	G 1/2" ^{1) 2)}
QX43/21	426	358	231	159	35	15	68	63	SAE 2"	SAE 1"	G 3/4" ^{1) 2)}
QX43/31	441	373			33						G 1/2" ^{1) 2)}
QX53/21	506	414	279	190	43	15	92	78	SAE 2 1/2"	SAE 1 1/4"	G 1/2" ^{1) 2)}
QX53/31	521	429			39						G 3/4" ^{1) 2)}
QX53/41	559	467	287	197	32	23	92	98	SAE 3"	SAE 1 1/2"	SAE 1"
QX63/31	591	499	337	234	47	14					G 3/4" ^{1) 2)}
QX63/41	614	522			39	27	SAE 1"				
QX63/51	651	559	342	239	40	28	117	125	SAE 3 1/2"	SAE 2"	SAE 1 1/4"
QX83/41	744	627	424	294	51	25					SAE 1"
QX83/51	770	653			47	30	SAE 1 1/4"				
QX83/61	797	680			45	35	SAE 4"	SAE 1 1/2"			

1) threaded port to DIN 3852, Part 2

2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

H Double pump QX.3/.2

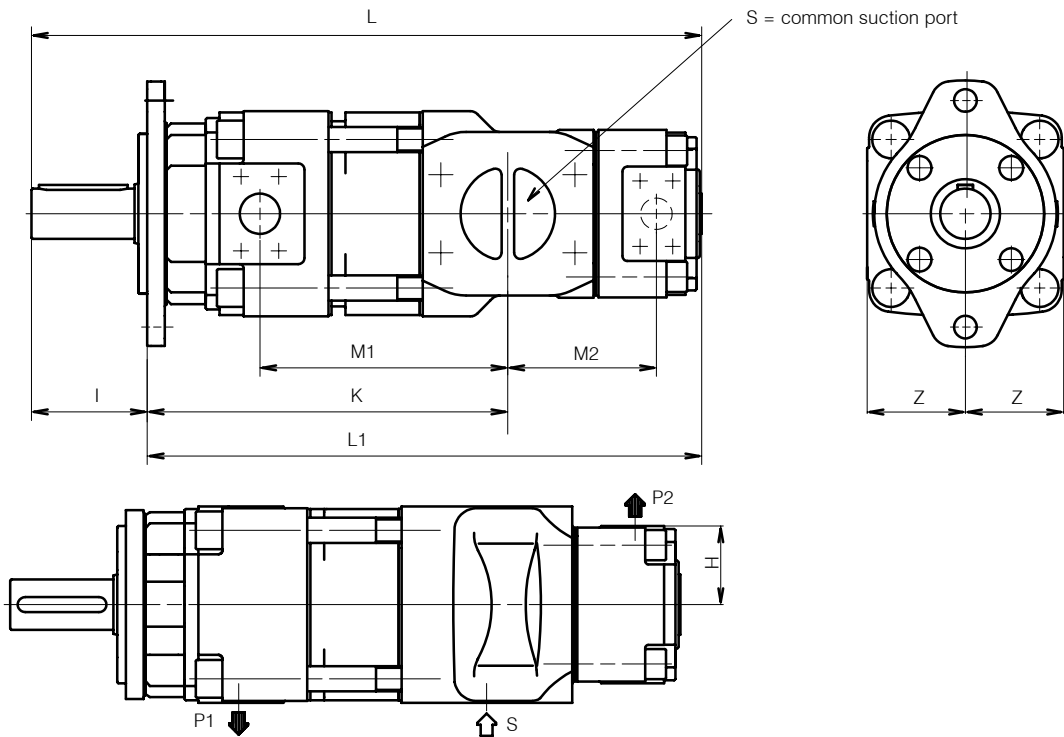


Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	I	Z	H	S	P1	P2
QX23/22	295	250	158	102	67	45	50	50	G 1 1/4" 1)	G 1/2" 1) 2)	G 1/2" 1) 2)
QX33/22	350	300	196	132	79	50	60		60	G 1 1/2" 1)	
QX33/32	363	313			87			68			63
QX43/22	408	340	231	159	84	63	60		SAE 2"	SAE 1"	
QX43/32	421	353			92			63			60
QX43/42	453	385	238	167	111	92	78		60	SAE 3"	
QX53/22	488	396			279			190			92
QX53/32	500	408	100	92		98	60		63	SAE 3"	SAE 1 1/2"
QX53/42	533	441	287		197			118			
QX53/52	553	461		127		92	98	60	63	SAE 3 1/2"	SAE 1 1/2"
QX63/32	571	479	337	234	112						
QX63/42	588	496			123	92	98	60	63	SAE 3 1/2"	SAE 1 1/2"
QX63/52	619	527	342	239	137						
QX63/62	638	546			149	92	98	60	63	SAE 3 1/2"	SAE 1 1/2"
QX83/42	718	601	424	294	141						
QX83/52	738	621			150	117	125	60	63	SAE 4"	SAE 2"
QX83/62	757	640	162	117	125						
QX83/82	789	672	179			117	125	60	63	SAE 4"	SAE 2"

1) threaded port to DIN 3852, Part 2

2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

I Double pump QX.3/.3

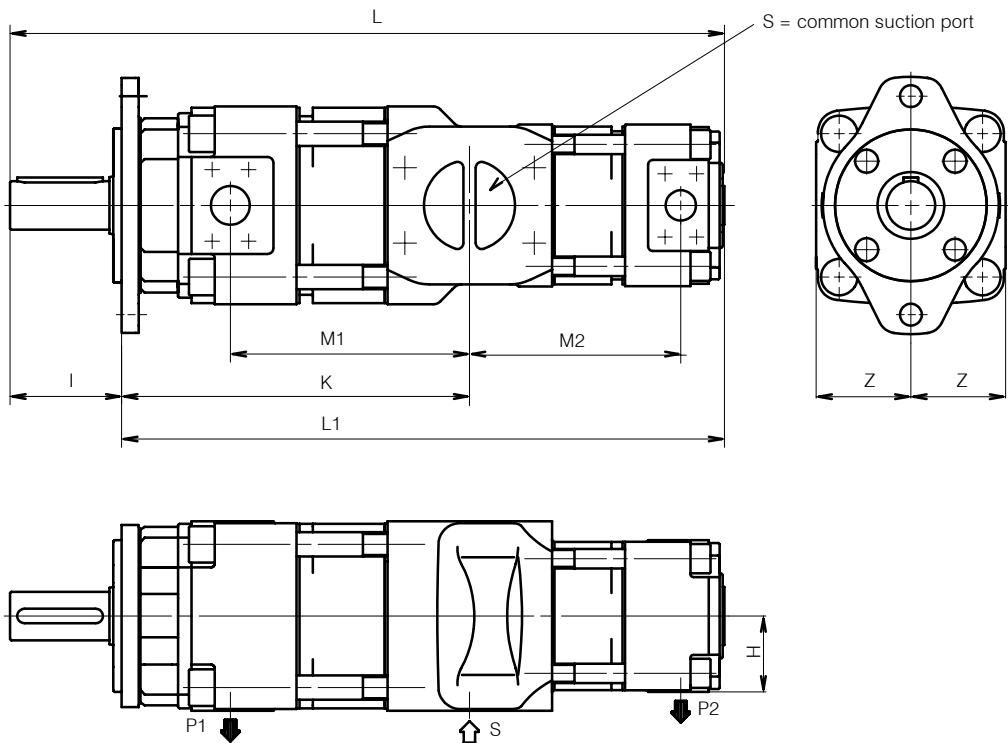

Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	I	Z	H	S	P1	P2		
QX23/23	330	285	158	102	102	45	50	50	G 1 1/4" 1) 2)	G 1/2" 1) 2)	G 1/2" 1) 2)		
QX33/23	385	335	196	132	114	50	60		G 1 1/2" 1) 2)	G 3/4" 1) 2)	G 3/4" 1) 2)		
QX33/33	408	358			132			68	63			60	SAE 2"
QX43/23	442	374	231	159	119	50	SAE 2"			SAE 1"	G 1/2" 1) 2)		
QX43/33	466	398		137	60	G 3/4" 1)							
QX43/43	509	441	238	167	167	63		SAE 2 1/2"	SAE 1 1/4"		SAE 1"		
QX53/23	523	431	279	190	127	92	78			50	G 1/2" 1) 2)		
QX53/33	546	454			145					60	G 3/4" 1) 2)		
QX53/43	589	497	287	197	174	92	98	63	SAE 3"	SAE 1"	SAE 1"		
QX53/53	623	531			197			78			SAE 1 1/4"		
QX63/33	616	524	337	234	157			92			98	60	SAE 3 1/2"
QX63/43	644	552			179	63	SAE 1"						
QX63/53	689	597	342	239	207	92	98	78	SAE 3 1/2"	SAE 1 1/2"	SAE 1 1/4"		
QX63/63	728	636			239			98			SAE 1 1/2"		
QX83/43	774	657	424	294	197			117			125	63	SAE 4"
QX83/53	808	691			220	78	SAE 1 1/4"						
QX83/63	847	730			252	98	SAE 1 1/2"						
QX83/83	904	787			294	125	SAE 2"						

1) threaded port to DIN 3852, Part 2

2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

5.3 Ordering code for double pumps

		Q	X	6	3	-	0	8	0	/	3	1	-	0	2	0	R	*	*
Series	= QX																		
Frame size	= 2 / 3 / 4 / 5 / 6 / 8																		
Pressure range	= 1 / 2 / 3																		
Displacement in cm ³ /rev	= 005 - 500																		
	Frame size																		= 2 / 3 / 4 / 5 / 6 / 8
	Pressure range																		= 1 / 2 / 3
	Displacement in cm ³ /rev																		= 005 - 500
Rotation (viewed from shaft end)	right (CW) = R left (ACW) = L																		
Variants / special features (to be inserted by the factory, see section 5.7 for a selection)																			

Ordering example:

Required:	double pump
Pump 1	
Displacement:	80 cm ³ /rev
Continuous pressure:	300 bar
Type:	63-080
Pump 2	
Displacement:	20 cm ³ /rev
Continuous pressure:	160 bar
Type:	31-020
for use with mineral oil	
Ordering code:	QX63-080/31-020R

6 Triple pumps

All of the triple pump combinations that can be supplied are listed in the following table. The individual pumps 1, 2 and 3 must be specified in accordance

with the main characteristics shown in section 2.

The largest pump of the combination is situated at the shaft end and is referred

to as Pump 1. For equal frame sizes, the pump with the larger displacement is situated at the drive side. Pumps 2 and 3 have a common suction port.

6.1 Selection table

QX2.	QX3.	Frame size of Pump 1		QX6.	QX8.
		QX4.	QX5.		
QX21/21/2.	QX31/31/3.	QX41/41/4.	QX51/51/5.	QX61/61/6.	QX81/81/8.
QX21/22/22	QX31/32/32	QX41/42/42	QX51/52/52	QX61/62/62	QX81/82/82
QX21/22/23	QX31/32/33	QX41/42/43	QX51/52/53	QX61/62/63	QX81/82/83
QX22/22/22	QX32/32/32	QX42/42/42	QX52/52/52	QX62/62/62	QX82/82/82
QX22/22/23	QX32/32/33	QX42/42/43	QX52/52/53	QX62/62/63	QX82/82/83
QX2./23/23	QX3./33/33	QX4./43/43	QX5./53/53	QX6./63/63	QX8./83/83
	QX31/3./2.	QX41/4./3.	QX51/5./4.	QX61/6./5.	QX81/8./6.
	QX32/32/2.	QX42/42/3.	QX52/52/4.	QX62/62/5.	QX82/82/6.
	QX3./33/2.	QX4./43/3.	QX5./53/4.	QX6./63/5.	QX8./83/6.
	QX3./21/2.	QX41/4./2.	QX51/5./3.	QX61/6./4.	QX81/8./5.
	QX3./22/22	QX42/42/2.	QX52/52/3.	QX62/62/4.	QX82/82/5.
	QX3./22/23	QX4./43/2.	QX5./53/3.	QX6./63/4.	QX8./83/5.
	QX3./23/23	QX4./31/3.	QX51/5./2.*	QX61/6./3.	QX81/8./4.
		QX4./32/32	QX52/52/2.	QX62/62/3.	QX82/82/4.
		QX4./32/33	QX5./53/2.	QX6./63/3.	QX8./83/4.
		QX4./33/33	QX5./41/4.	QX6./51/5.	QX8./61/6.
		QX4./21/2.	QX5./42/42	QX6./52/52	QX8./62/62
		QX4./22/22	QX5./42/43	QX6./52/53	QX8./62/63
		QX4./22/23	QX5./43/43	QX6./53/53	QX8./63/63
		QX4./23/23	QX5./4./2.	QX6./5./3.	QX8./6./4.
			QX5./31/3.	QX6./5./2.	QX8./6./3.
			QX5./32/32	QX6./41/4.	QX8./51/5.
			QX5./32/33	QX6./42/42	QX8./52/52
			QX5./33/33	QX6./42/43	QX8./52/53
			QX5./21/2.	QX6./43/43	QX8./53/53
			QX5./22/22	QX6./4./2.	QX8./5./3.
			QX5./22/23	QX6./31/3.	QX8./5./2.
			QX5./23/23	QX6./32/32	QX8./41/4.
				QX6./32/33	QX8./42/42
				QX6./33/33	QX8./42/43
					QX8./43/43
					QX8./4./2.
65	130	260	520	1050	2100

Maximum permissible drive shaft torque in Nm

In the above type codes, any dots (.) can be replaced by the pressure range 1, 2 or 3.

* this pump is used as the ordering example in section 6.2

6.2 Ordering code for triple pumps

		Q	X	5	1	-	1	2	5	/	5	1	-	0	8	0	/	2	3	-	0	0	8	R	*	*
Series	= QX																									
Frame size	= 2 / 3 / 4 / 5 / 6 / 8																									
Pressure range	= 1 / 2 / 3																									
Displacement in cm ³ /rev	= 005 - 500																									
Frame size	= 2 / 3 / 4 / 5 / 6 / 8																									
Pressure range	= 1 / 2 / 3																									
Displacement in cm ³ /rev	= 005 - 500																									
Frame size	= 2 / 3 / 4 / 5 / 6 / 8																									
Pressure range	= 1 / 2 / 3																									
Displacement in cm ³ /rev	= 005 - 500																									
Rotation (viewed from shaft end)	right (CW) = R left (ACW) = L																									
Variants / special features (to be inserted by the factory, see section 4.7 for a selection)																										

Ordering example:

Required: triple pump

Pump 1

Displacement: 125 cm³/rev

Continuous pressure: 80 bar

Type: 51-125

Pump 2

Displacement: 80 cm³/rev

Continuous pressure: 150 bar

Type: 51-080

Pump 3

Displacement: 8cm³/rev

Continuous pressure: 320 bar


Type: 23-008

For use with mineral oil

Referring to the selection table in sect. 6.1,
QX51/51/23 is an obtainable combination.

Ordering code: QX51-125/51-080/23-008R

6.2.1 Layout of the selected pump

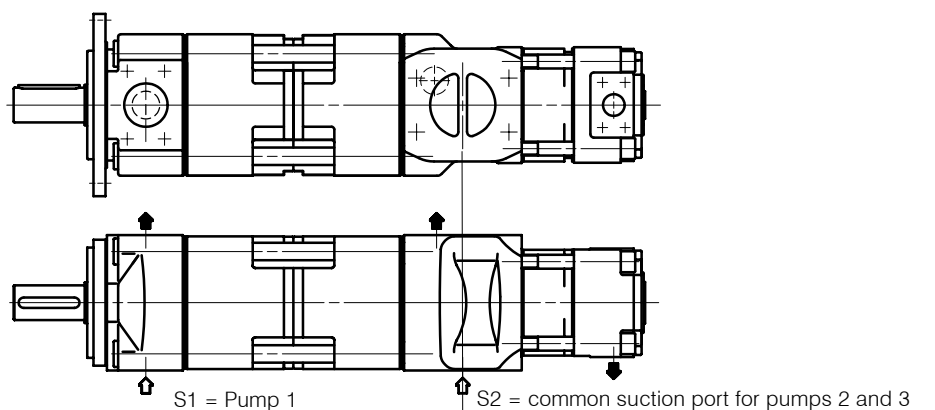

7 Pressure-holding pumps

7.1 Generals

The QX high pressure internal gear pump is a further development of the Bucher internal gear pump, which has proven itself in more than 30 years of service around the world. With displacements of 3 and 4 cm³/rev, it extends the low-flow capability of the QX range.

Advantages:

- High pressures
- Low noise level
- Long service life
- Negligible flow- and pressure-pulsations
- Insensitive to contamination of the fluid

7.2 Technical data

Mounting attitude	unrestricted
Mounting method (standard)	oval 2-hole flange to ISO 3019/2 (metric)
Direction of rotation	right, alternatively left (but not reversible)
Pump drive method	in-line, by flexible coupling
Fluids	HLP mineral oils to DIN 51524, Part 2 HFC fluids to VDMA 24317 other fluids - consult Bucher Hydraulics
Minimum fluid cleanliness	NAS 1638, class 9 or ISO 4406, code 20/18/15
Viscosity range	20 ... 300 mm ² /s (for values outside this range, consult Bucher Hydraulics)
Fluid temperature	HLP mineral oils 80 °C max. HFC 50 °C max.
Minimum inlet pressure	0.85 bar absolute
Maximum pressure at drain port	1.5 bar absolute
External drain port	is always provided

7.3 Main characteristics

Effective displacement	Flow rate ¹⁾		Maximum speed	Type	Mineral oil to DIN 51524 Cont./Max. interm. pressure ²⁾		HFC to VDMA 24317 interm. pressure ²⁾		Torque ³⁾	Power requirement ⁴⁾
	cm ³ /rev	l/min			bar	bar	Nm	kW		
3.3	4.8	3600	QX24-003	320 / 400	280 / 350	17	2.6			
4.2	6.2	3600	QX24-005	320 / 400	280 / 350	21	3.2			

This operating data is valid for hydraulic oils as well as fire-resistant and environmentally-friendly fluids with a viscosity of 42 mm²/s

3) at speed n = 1450 rpm (theoretical)


4) maximum intermittent pressure for max. 20 sec. but not more than 10% of the duty cycle

5) theoretical value at the max. permitted continuous pressure for mineral oil

6) theoretical value at the max. permitted continuous pressure for mineral oil at n = 1450 rpm


7.4 Efficiency

Measured at speed $n = 1450 \text{ rpm}$
 Viscosity $42 \text{ mm}^2/\text{s}$

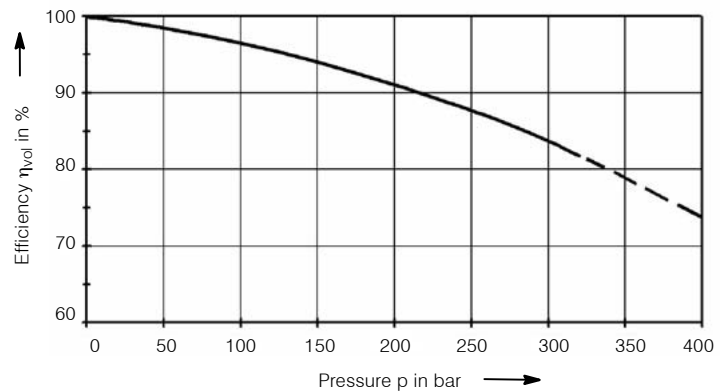

7.5 Single pump

7.5.1 Dimensions

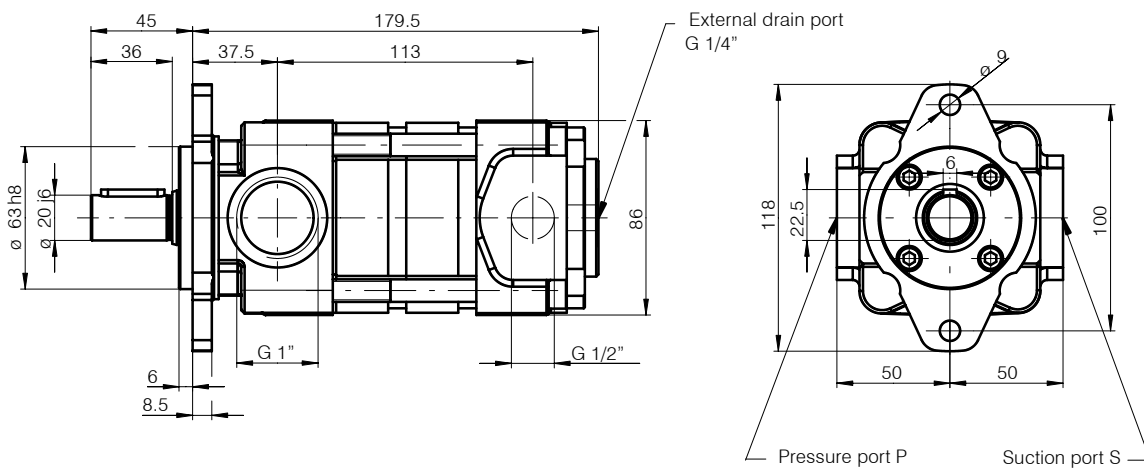

7.5.2 Ordering code

Q X 2 4 - 0 0 4 R * *

Series	= QX
Size	= 2
Pressure range	= 4
Displacement in cm^3/rev	= 003 and 004
Direction of rotation	right = R left = L

Variants / special features (to be inserted by the factory, see section 7.5.4 for a selection)

7.5.3 Standard configuration


- direction of rotation "right "
- 2- hole mounting flange to ISO 3019/2 (metric)
- Nitrile seals
- cylindrical shaft end to ISO R775
- separate drain port G 1/4 in rear cover of the pump

7.5.4 Special features

09 = Viton seals

7.6 Pressure-holding pump compined also QX-pump

7.6.1 Dimensions

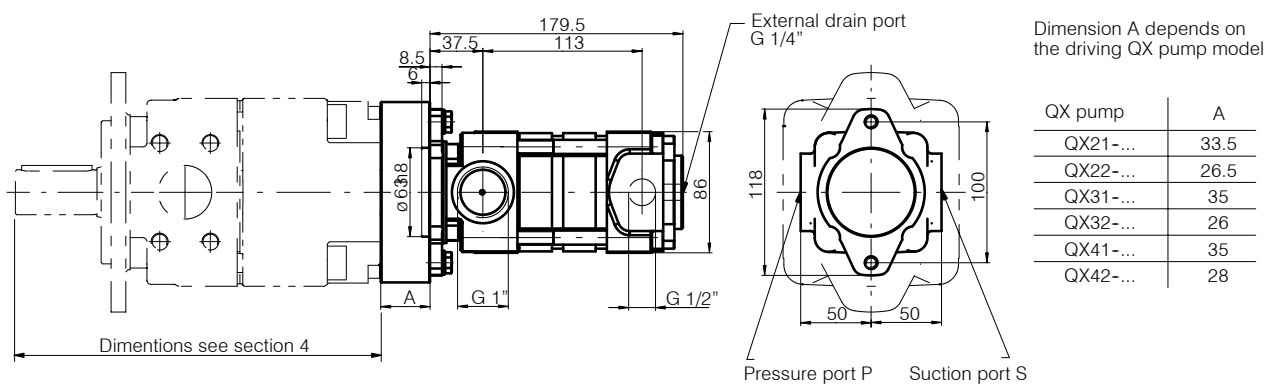

7.6.2 Ordering code

		Q	X	4	1	-	0	4	0	/	2	4	-	0	0	4	R	3	2	4	
Series	= QX																				
Size	= 2 / 3 / 4 / 5 / 6 / 8																				
Pressure range	= 1 / 2 / 3																				
Displacement in cm ³ /rev	= 005 bis 500																				
Size	= 2																				
Pressure range	= 4																				
Displacement in cm ³ /rev	= 003 and 004																				
Direction of rotation	right = R left = L																				

Ordering example:

Required: Double pump

Pump 1

Displacement: 40 cm³/rev

Continuous pressure: 160 bar

Type: 41 - 040

Pump 2

Displacement: 4 cm³/rev

Continuous pressure: 250 bar

Type: 24 - 003

For use with mineral oil:

Ordering code: QX41-040/24-004R 324

8 Fluid cleanliness

QX pumps require fluid with a minimum cleanliness level of NAS 1638, Class 9 or ISO 4406, code 20/18/15. This can be achieved with a filter ratio of $\beta_{10} \geq 100$.

HLP hydraulic oils to DIN 51524, Part 2, can be used without any special restriction as long as they remain within the specified temperature and viscosity ranges. HFC fire-resistant fluids to DIN 51502 can be used with the QR, QT, QX and QXM series. Note that all fire-resistant fluids require special versions of the pumps or motors and must be approved by Bucher Hydraulics. We recommend the use of fluids that contain anti-wear additives for mixed-friction operating conditions. Fluids without appropriate additives can reduce the service life of pumps and motors. The user is responsible for maintaining, and regularly checking, the fluid quality. Bucher Hydraulics recommends a load capacity of ≥ 30 N/mm² to Brügger DIN 51347-2.

9 Note

This catalogue is intended for users with specialist knowledge. The user must check the suitability of the equipment described herein in order to ensure that all of the conditions necessary for the safety and proper functioning of the system are fulfilled. If you have any doubts or questions concerning the use of these pumps, please consult Bucher Hydraulics.


10 Accessories

10.1 Bolt-on valves - SAE 3000 pattern

Ordering details	Pressure relief A^S_GDF / A^S_GDH	Pressure relief solenoid control A^S_GDA / ASDM	Pressure relief proportional solenoid control A^S_GDP
Symbols			
Ordering details	Unloading valve A^S_GAF	Accumulator charging valve A^S_GSF	S = for pipe flange SAE 3000 pattern R = with threaded port
Symbols			

10.2 Pipe flange - high pressure type for up to 420 bar - SAE 3000 pattern

Dimensions

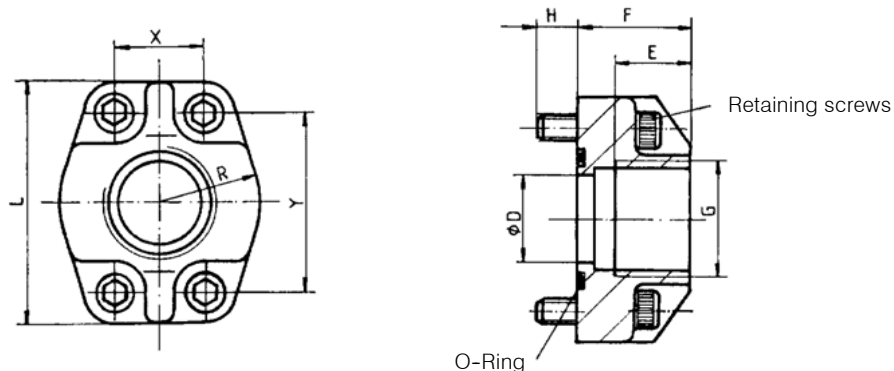

Threaded pipe flanges are spot-faced for DIN 2353 pipe fittings


Material: ST37
For Viton seals, contact Bucher Hydraulics

Ordering number	Ordering code	Size	DØ	E	F	H	L	R	X	Y	O-ring 90 Shore 'A'	Retaining screws DIN912-12.9	Torque Nm
037000	RF 01-R08	G 1/2"	12,5	16	27	13	54	23	17,5	38	20,24x2,62	M 8x30	30
037010	RF 02-R10	G 3/4"	20	18	30	12	65	26	22,2	47,6	26,65x2,62	M 10x30	60
037020	RF 03-R11	G 1"	25	20	34	13	70	29	26,2	52,4	32,99x2,62	M 10x35	60
037030	RF 04-R12	G 1 1/4"	32	22	38	14	80	36	30,2	58,6	40,86x3,53	M 10x40	60
037040	RF 05-R13	G 1 1/2"	38	24	41	19	94	41	35,7	70	44,04x3,53	M12x45	120
037050	RF 06-R14	G 2"	50	26	45	20	102	48	42,9	77,8	59,92x3,53	M12x50	120
055470	RF 07-R16	G 2 1/2"	63	30	50	18	114	57	50,8	89	72,62x3,53	M12x45	120

* at RF07 only to 210 bar be allowed

10.3 Low pressure type for up to 16 bar - SAE 3000 pattern

Dimensions

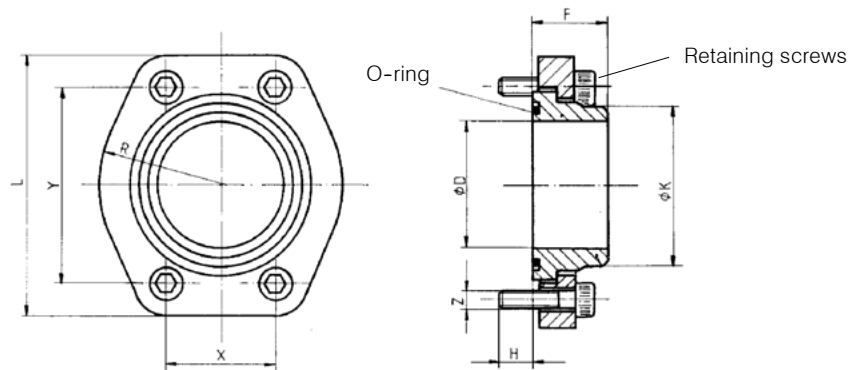

Material: ST37

For Viton seals, contact Bucher Hydraulics

Ordering number	Ordering code	SAE flange Size	D	K	F	H	L	R	X	Y	O-ring 90 Shore 'A'	Retaining screws DIN 912-8.8	Torque Nm	pipe ¹⁾ O/dia.approx.
062450	RF 07-S	2 1/2"	63	75	35	14	120	57	51	89	69,44x3,53	M 12x30	70	75
063880	RN 08-S	3"	76	88			140,5	68	62	106,5	85,32x3,53	M 16x30	180	88
063890	RN 09-S	3 1/2"	89	100	40	19	158,5	73	70	120,3	98,02x3,53	M 16x40	180	100
063900	RN 10-S	4"	103	115			168	79	78	130	110,72x3,53	M 16x40	180	115

1) We recommend the use of seamless precision steel tube to DIN 2391 with wallthick. max 6 mm

BUCHER HYDRAULICS

www.bucherhydraulics.com

Germany

Phone +49 7742 85 20
Fax +49 7742 71 16
info.de@bucherhydraulics.com

France

Phone +33 389 64 22 44
Fax +33 389 65 28 78
info.fr@bucherhydraulics.com

Netherlands

Phone +31 79 34 26 24 4
Fax +31 79 34 26 28 8
info.nl@bucherhydraulics.com

UK

Phone +44 24 76 35 35 61
Fax +44 24 76 35 35 72
info.uk@bucherhydraulics.com

USA

Phone +1 262 605 82 80
Fax +1 262 605 82 78
info.wi@bucherhydraulics.com

Switzerland

Phone +41 33 67 26 11 1
Fax +41 33 67 26 10 3
info.ch@bucherhydraulics.com

Italy

Phone +39 0522 92 84 11
Fax +39 0522 51 32 11
info.it@bucherhydraulics.com

Austria

Phone +43 6216 44 97
Fax +43 6216 44 97 4
info.at@bucherhydraulics.com

China

Phone +86 512 6 322 12 99
Fax +86 512 6 322 10 33
info.sh@bucherhydraulics.com

Product Center (Elevator)

Phone +41 41 757 03 33
Fax +41 41 755 16 49
info.nh@bucherhydraulics.com

We reserve the right of modification without prior notice.