

# TECHNICAL CATALOGUE



FIXED DISPLACEMENT  
HYDRAULIC VANE PUMPS


***BD series***



## HIGH PRESSURE HYDRAULIC VANE PUMPS BD SERIES


Versatility, power, compactness and low running costs are the main characteristics of BD vane pumps. All the components subject to wear are contained in a cartridge unit that can be easily removed for inspection and/or replacement without disconnecting the pump from the circuit, drastically reducing expensive machine down time. The cartridge contains a rotor, vanes and pins, a cam ring and two supports. During operation the rotor is driven by a splined shaft coupled to the drive unit. As the rotation speed increases, centrifugal forces, in combination with the pressure generated behind the vanes, push the vanes outwards, where they follow the profile of the cam with a sufficient contact pressure to ensure adequate hydraulic sealing. The two opposed pumping chambers formed by the elliptical profile of the cam cancel out radial loads on the shaft bearings, thereby giving them extremely long lifetimes. The special design of the double-lip vanes renders the BD series pumps particularly suitable for applications requiring high pressure levels and very low noise emissions.

The BD series is available in three versions of single pump (from 10 to 227 l/min at 1000 rpm) and four versions of double pump (from 20 to 385 l/min total, at 1000 rpm), with input powers of over 328 KW at max pressure and speed. The BD series pumps are extremely compact and are supplied with SAE norm hydraulic flanges and shafts. This makes them very easy to install and guarantees their interchangeability with other similar pumps.

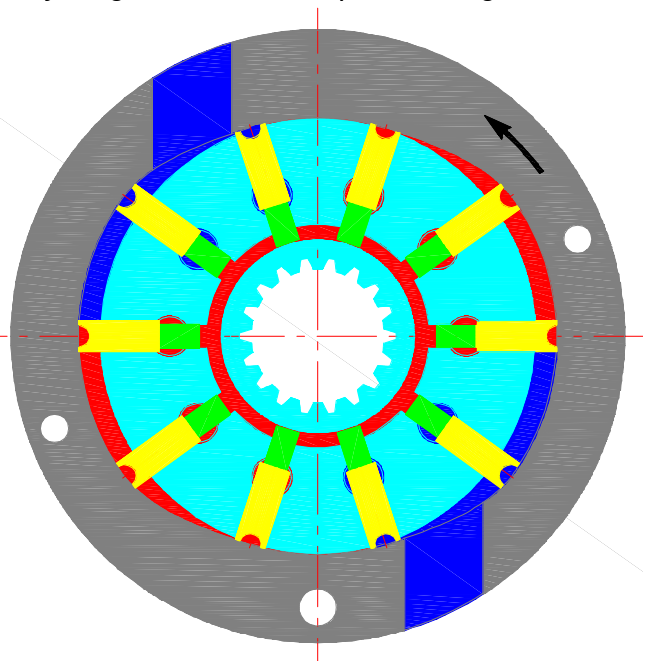

## **contents**

|                             |         |
|-----------------------------|---------|
| Single pump BD02.....       | pag. 5  |
| Single pump BD04.....       | pag. 13 |
| Single pump BD05.....       | pag. 21 |
| Double pump BD22 .....      | pag. 29 |
| Double pump BD42 .....      | pag. 37 |
| Double pump BD52 .....      | pag. 45 |
| Double pump BD54 .....      | pag. 53 |
| Operating instructions..... | pag. 62 |

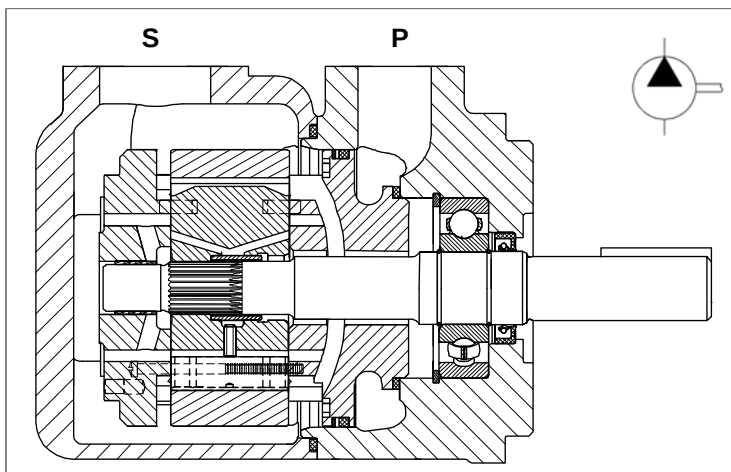

## General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in 15 different displacements from 16 to 150 l/min (from 4 to 40 gpm) at 1500 rpm and pressure 0 bar.

## Technical characteristics

| Cartridge model | Geometric displacement |                      | Rated capacity at 0 bar |         |          |         | Maximum pressure |        |           |        | Speed range |
|-----------------|------------------------|----------------------|-------------------------|---------|----------|---------|------------------|--------|-----------|--------|-------------|
|                 |                        |                      | 1200 rpm                |         | 1500 rpm |         | intermittent     |        | continuos |        |             |
|                 | ml/rev.                | (in <sup>3</sup> /r) | l/min                   | (gpm)   | l/min    | (gpm)   | bar              | (psi)  | bar       | (psi)  |             |
| 03              | 10,8                   | (0.66)               | 12,93                   | (3.42)  | 16,2     | (4.29)  | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 05              | 17,2                   | (1.05)               | 20,60                   | (5.45)  | 25,8     | (6.83)  | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 06              | 21,3                   | (1.30)               | 25,52                   | (6.75)  | 31,9     | (8.44)  | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 08              | 26,4                   | (1.61)               | 31,64                   | (8.37)  | 39,6     | (10.48) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 10              | 34,1                   | (2.08)               | 40,86                   | (10.81) | 51,1     | (13.52) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 12              | 37,1                   | (2.26)               | 44,45                   | (11.76) | 55,6     | (14.71) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 14              | 46,0                   | (2.81)               | 55,11                   | (14.58) | 69,0     | (18.25) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 17              | 58,3                   | (3.56)               | 69,85                   | (18.48) | 87,4     | (23.12) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 20              | 63,8                   | (3.89)               | 76,47                   | (20.23) | 95,7     | (25.32) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 22              | 70,3                   | (4.29)               | 84,26                   | (22.29) | 105,4    | (27.88) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 25              | 79,3                   | (4.84)               | 95,03                   | (25.14) | 118,9    | (31.46) | 275              | (4000) | 240       | (3500) | 400 - 2500  |
| 28              | 88,8                   | (5.42)               | 106,41                  | (28.15) | 133,2    | (35.24) | 210              | (3000) | 160       | (2300) | 400 - 2500  |
| 31              | 100,0                  | (6.10)               | 119,83                  | (31.70) | 150,0    | (39.68) | 210              | (3000) | 160       | (2300) | 400 - 2500  |

**Hydraulic fluids:** antiwear petroleum base, synthetic fluid, water glycols and invert emulsions.

**Viscosity range / Viscosity index:** with antiwear petroleum base, from 10 to 2000 cSt. (10 to 108 cSt. recommended). Other fluids from 18 to 2000 c.St. (18 to 108 c.St. recomm.). Choose 30 c.St. for max life-time. *Viscosity index:* 90° min.

**Filtration:** to maintain contamination level to ISO 18/14 or NAS 1638 class 8.

Filters: for the inlet, use strainer with mesh not less than 149 micron abs. (omit strainer with application requiring cold start or when using fire resistant fluids); for the return line - 25 micron abs. or better.

**Water contamination level:** max 0.10% for mineral oil. With other fluids, max 0.05%

**Intermittent pressure:** typically the working time permitted at such pressure is < 30% of the duty cycle. With duty cycles longer than 15 minutes, please contact the technical office of B&C.


**Minimum inlet pressure:** (with mineral oil 10-65 c.St.): 0,8 bar abs. (3 psi abs.). In the biggest displacements of each series and with the highest speeds, is required an higher inlet pressure. Please consult the specific section for details. In case of tandem pump, supply the inlet port with the highest pressure requested among the pump stages.

**Operating temperature:** with "antiwear petroleum base" the permitted temperature is: from -18 to +100° C; with water glycol and "water in oil emulsion": from +10 to +50°C; with syntetic fluid: from -18 to +70°C; with rapeseed and esters: from -20 to + 70°C. During cold start the pumps should be operated at low speed and pressure until fluid warms up to an acceptable viscosity for full power operation.


**Drive:** direct and coaxial by means of a flexible coupling. Low axial and radial loads allowed. Consult specific section for more detail.

## Main operating data

**max pressure / fluid type**

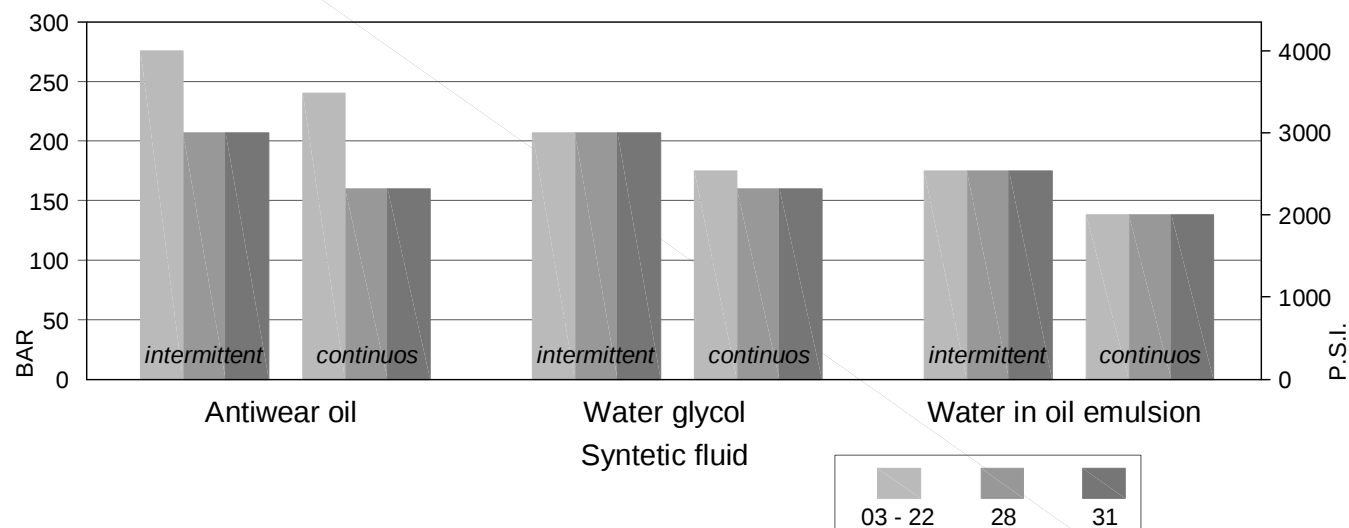

**max speed / fluid type**

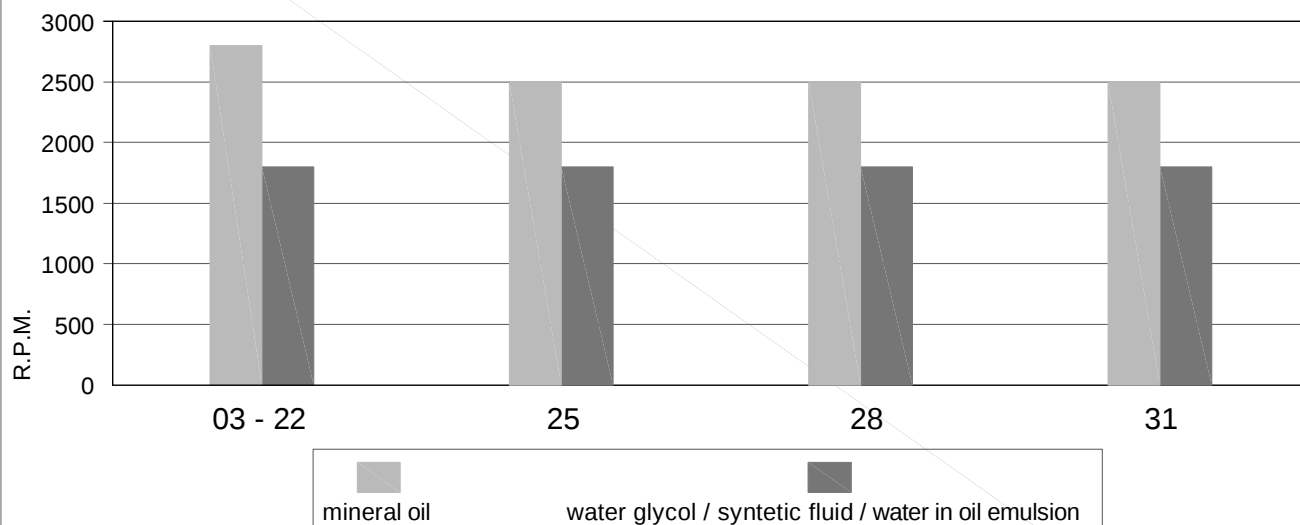





**min. allowable inlet pressure / rotation speed (abs. bar)\***

| Speed<br>r.p.m. | from 03<br>to 10 | 12   | 14   | 17   | 20   | 22   | 25   | 28   | 31   |
|-----------------|------------------|------|------|------|------|------|------|------|------|
| 2800            | 1.00             | 1.00 | 1.00 | 1.03 | 1.03 | 1.05 |      |      |      |
| 2500            | 0.90             | 0.92 | 0.95 | 0.95 | 0.95 | 0.98 | 1.05 | 1.08 | 1.11 |
| 2300            | 0.80             | 0.85 | 0.85 | 0.90 | 0.90 | 0.90 | 0.95 | 0.98 | 1.0  |
| 2200            | 0.80             | 0.80 | 0.80 | 0.85 | 0.85 | 0.90 | 0.95 | 0.98 | 0.90 |
| 2100            | 0.80             | 0.80 | 0.80 | 0.80 | 0.80 | 0.85 | 0.90 | 0.90 | 0.85 |
| 1800            | 0.80             | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| 1500            | 0.80             | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| 1200            | 0.80             | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |

\* measured inside the inlet flange; with petroleum base fluid (visc. 10 to 65 cSt.).

Multiply the abs. pressure by 1.25 when using water-glycol or "water in oil emulsion", by 1.35 with synthetic fluids, and by 1.1 with ester or rapeseed base.

## Main operating data

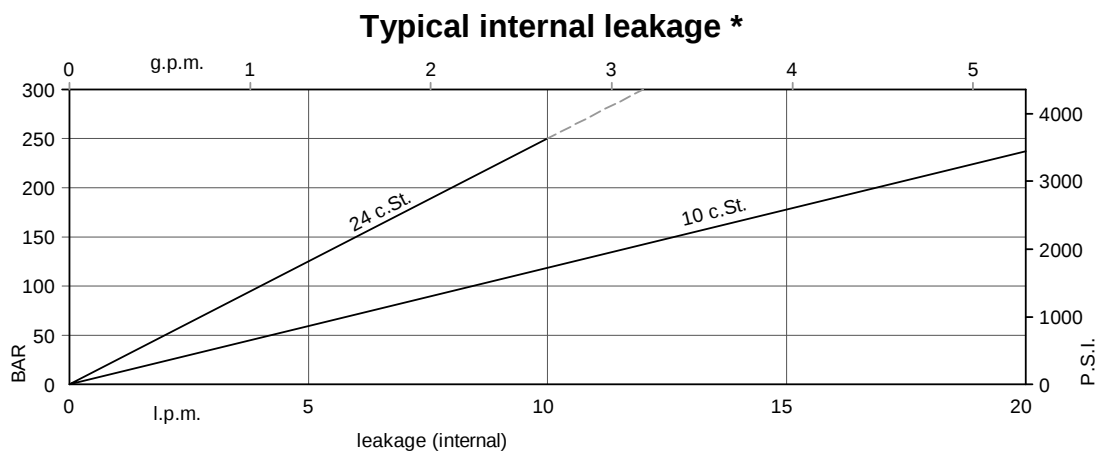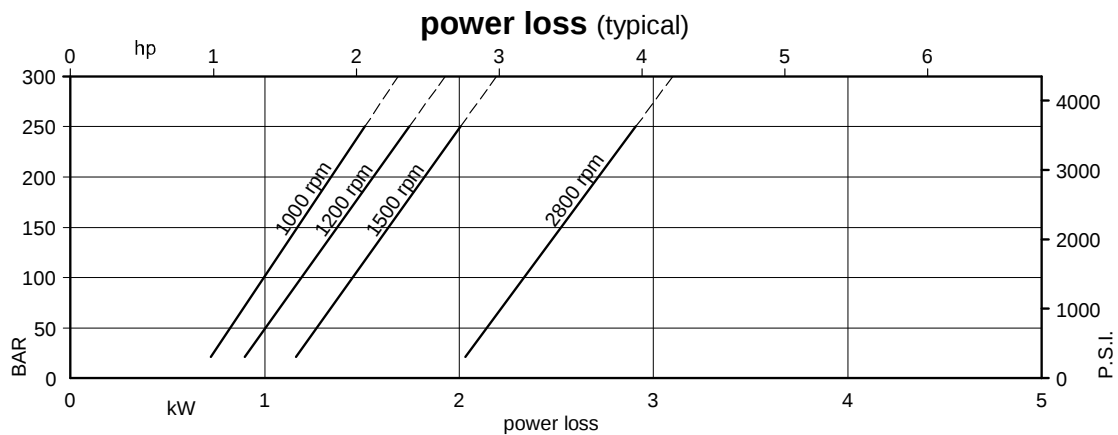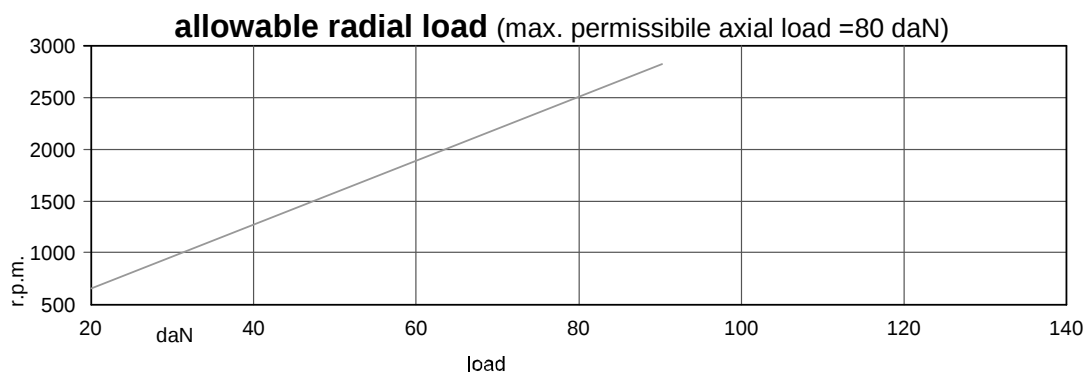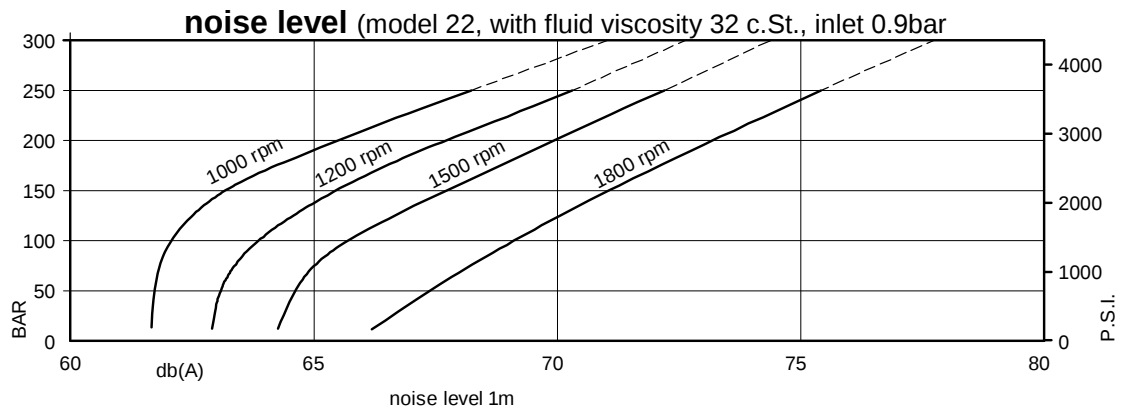

\* If the internal leakage is more than 50% of the theoretical flow, do not operate the pump

## Specific operating data

Typical: 24 c.St. (115 SUS)


| Cartridge model        | Geometric displacement |                      | Speed rpm | 140 bar |         | 240 bar              |                       | Input power (kW) |                    |                     |
|------------------------|------------------------|----------------------|-----------|---------|---------|----------------------|-----------------------|------------------|--------------------|---------------------|
|                        | ml/rev.                | (in <sup>3</sup> /r) |           | l/min   | (gpm)   | l/min                | (gpm)                 | 7 bar (100 psi)  | 140 bar (2000 psi) | 240 bar (3500 psi)  |
| <b>03</b>              | 10,8                   | (0.66)               | 1000      | -       | -       | -                    | -                     | 1.00             | -                  | -                   |
|                        |                        |                      | 1200      | -       | -       | -                    | -                     | 1.05             | -                  | -                   |
|                        |                        |                      | 1500      | 10,7    | (2.84)  | -                    | -                     | 1.30             | 5.30               | -                   |
|                        |                        |                      | 1800      | 13,6    | (3.61)  | -                    | -                     | 1.55             | 8.45               | -                   |
| <b>05</b>              | 17,2                   | (1.05)               | 1000      | 11,7    | (3.09)  | -                    | -                     | 1.10             | 5.10               | -                   |
|                        |                        |                      | 1200      | 15,1    | (3.99)  | -                    | -                     | 1.14             | 8.17               | -                   |
|                        |                        |                      | 1500      | 20,3    | (5.37)  | 15,8                 | (4.18)                | 1.40             | 7.50               | 12.2                |
|                        |                        |                      | 1800      | 25,1    | (6.65)  | 21,0                 | (5.56)                | 1.68             | 12.0               | 14.4                |
| <b>06</b>              | 21,3                   | (1.30)               | 1000      | 15,80   | (4.18)  | 11,30                | (2.99)                | 1.10             | 6.00               | 10.00               |
|                        |                        |                      | 1200      | 19,73   | (5.22)  | 15,61                | (4.13)                | 1.19             | 7.13               | 11.86               |
|                        |                        |                      | 1500      | 26,50   | (7.01)  | 22,00                | (5.82)                | 1.50             | 8.90               | 14.70               |
|                        |                        |                      | 1800      | 32,51   | (8.60)  | 28,39                | (7.51)                | 1.76             | 10.50              | 17.33               |
| <b>08</b>              | 26,4                   | (1.61)               | 1000      | 20,90   | (5.53)  | 16,40                | (4.34)                | 1.20             | 7.20               | 12.10               |
|                        |                        |                      | 1200      | 25,86   | (6.84)  | 21,74                | (5.75)                | 1.26             | 8.51               | 14.29               |
|                        |                        |                      | 1500      | 34,10   | (9.02)  | 29,60                | (7.83)                | 1.60             | 10.70              | 17.70               |
|                        |                        |                      | 1800      | 41,66   | (11.02) | 37,54                | (9.93)                | 1.87             | 12.58              | 20.98               |
| <b>10</b>              | 34,1                   | (2.08)               | 1000      | 28,60   | (7.57)  | 24,10                | (6.38)                | 1.30             | 8.90               | 15.10               |
|                        |                        |                      | 1200      | 35,08   | (9.28)  | 30,96                | (8.19)                | 1.37             | 10.61              | 17.96               |
|                        |                        |                      | 1500      | 45,70   | (12.09) | 41,20                | (10.90)               | 1.70             | 13.40              | 22.30               |
|                        |                        |                      | 1800      | 55,53   | (14.69) | 51,41                | (13.60)               | 2.03             | 15.72              | 26.47               |
| <b>12</b>              | 37,1                   | (2.26)               | 1000      | 31,60   | (8.36)  | 27,10                | (7.17)                | 1.30             | 9.60               | 16.30               |
|                        |                        |                      | 1200      | 38,67   | (10.23) | 34,55                | (9.14)                | 1.41             | 11.42              | 19.38               |
|                        |                        |                      | 1500      | 50,20   | (13.28) | 45,70                | (12.09)               | 1.70             | 14.40              | 24.10               |
|                        |                        |                      | 1800      | 60,90   | (16.11) | 56,78                | (15.02)               | 2.09             | 16.95              | 28.62               |
| <b>14</b>              | 46,0                   | (2.81)               | 1000      | 40,50   | (10.71) | 36,00                | (9.52)                | 1.40             | 11.70              | 19.90               |
|                        |                        |                      | 1200      | 49,33   | (13.05) | 45,21                | (11.96)               | 1.53             | 13.85              | 23.62               |
|                        |                        |                      | 1500      | 63,50   | (16.80) | 59,00                | (15.61)               | 1.90             | 17.60              | 29.50               |
|                        |                        |                      | 1800      | 76,92   | (20.35) | 72,80                | (19.26)               | 2.27             | 20.58              | 34.97               |
| <b>17</b>              | 58,3                   | (3.56)               | 1000      | 52,80   | (13.97) | 48,30                | (12.78)               | 1.60             | 14.50              | 24.80               |
|                        |                        |                      | 1200      | 64,07   | (16.95) | 59,95                | (15.86)               | 1.70             | 17.19              | 29.47               |
|                        |                        |                      | 1500      | 82,00   | (21.69) | 77,50                | (20.50)               | 2.10             | 21.90              | 36.90               |
|                        |                        |                      | 1800      | 99,04   | (26.20) | 94,92                | (25.11)               | 2.52             | 25.60              | 43.76               |
| <b>20</b>              | 63,8                   | (3.89)               | 1000      | 58,30   | (15.42) | 53,80                | (14.23)               | 1.60             | 15.80              | 27.00               |
|                        |                        |                      | 1200      | 70,69   | (18.70) | 66,57                | (17.61)               | 1.77             | 18.68              | 32.09               |
|                        |                        |                      | 1500      | 90,20   | (23.86) | 85,70                | (22.67)               | 2.20             | 23.80              | 40.20               |
|                        |                        |                      | 1800      | 108,90  | (28.81) | 103,65               | (27.42)               | 2.63             | 27.84              | 47.68               |
| <b>22</b>              | 70,3                   | (4.29)               | 1000      | 64,80   | (17.14) | 60,30                | (15.95)               | 1.70             | 17.30              | 29.60               |
|                        |                        |                      | 1200      | 78,47   | (20.76) | 74,35                | (19.67)               | 1.86             | 20.46              | 35.18               |
|                        |                        |                      | 1500      | 100,00  | (26.46) | 95,50                | (25.26)               | 2.30             | 26.10              | 44.10               |
|                        |                        |                      | 1800      | 120,58  | (31.90) | 116,46               | (30.81)               | 2.76             | 30.49              | 52.32               |
| <b>25<sup>1)</sup></b> | 79,3                   | (4.84)               | 1000      | 73,80   | (19.52) | 69,30                | (18.33)               | 1.80             | 19.30              | 33.20               |
|                        |                        |                      | 1200      | 89,25   | (23.61) | 85,13                | (22.52)               | 1.99             | 22.90              | 39.47               |
|                        |                        |                      | 1500      | 113,50  | (30.03) | 109,00               | (28.84)               | 2.50             | 29.20              | 49.50               |
|                        |                        |                      | 1800      | 136,76  | (36.18) | 132,64               | (35.09)               | 2.95             | 34.16              | 58.75               |
| <b>28<sup>1)</sup></b> | 88,8                   | (5.42)               | 1000      | 83,30   | (22.04) | 80,10 <sup>2)</sup>  | (21.19) <sup>2)</sup> | 1.90             | 21.90              | 32.50 <sup>2)</sup> |
|                        |                        |                      | 1200      | 100,62  | (26.62) | 97,75 <sup>2)</sup>  | (25.86) <sup>2)</sup> | 2.11             | 25.49              | 37.77 <sup>2)</sup> |
|                        |                        |                      | 1500      | 127,70  | (33.78) | 124,50 <sup>2)</sup> | (32.94) <sup>2)</sup> | 2.80             | 32.70              | 48.50 <sup>2)</sup> |
|                        |                        |                      | 1800      | 153,85  | (40.70) | 150,97 <sup>2)</sup> | (39.94) <sup>2)</sup> | 3.14             | 38.04              | 56.42 <sup>2)</sup> |
| <b>31<sup>1)</sup></b> | 100,0                  | (6.10)               | 1000      | 94,50   | (25.00) | 91,30 <sup>2)</sup>  | (24.15) <sup>2)</sup> | 2.00             | 24.40              | 36.40 <sup>2)</sup> |
|                        |                        |                      | 1200      | 114,04  | (30.17) | 111,17 <sup>2)</sup> | (29.41) <sup>2)</sup> | 2.26             | 28.53              | 42.34 <sup>2)</sup> |
|                        |                        |                      | 1500      | 144,50  | (38.23) | 141,30 <sup>2)</sup> | (37.38) <sup>2)</sup> | 2.80             | 36.50              | 54.40 <sup>2)</sup> |
|                        |                        |                      | 1800      | 173,99  | (46.03) | 171,12 <sup>2)</sup> | (45.27) <sup>2)</sup> | 3.37             | 42.61              | 63.28 <sup>2)</sup> |

- Internal leakage exceeding 50% of the theoretical flow

1) 2500 r.p.m. max.


2) 210 bar (3000 p.s.i.) max. int.

## Installation dimensions mm (inches)

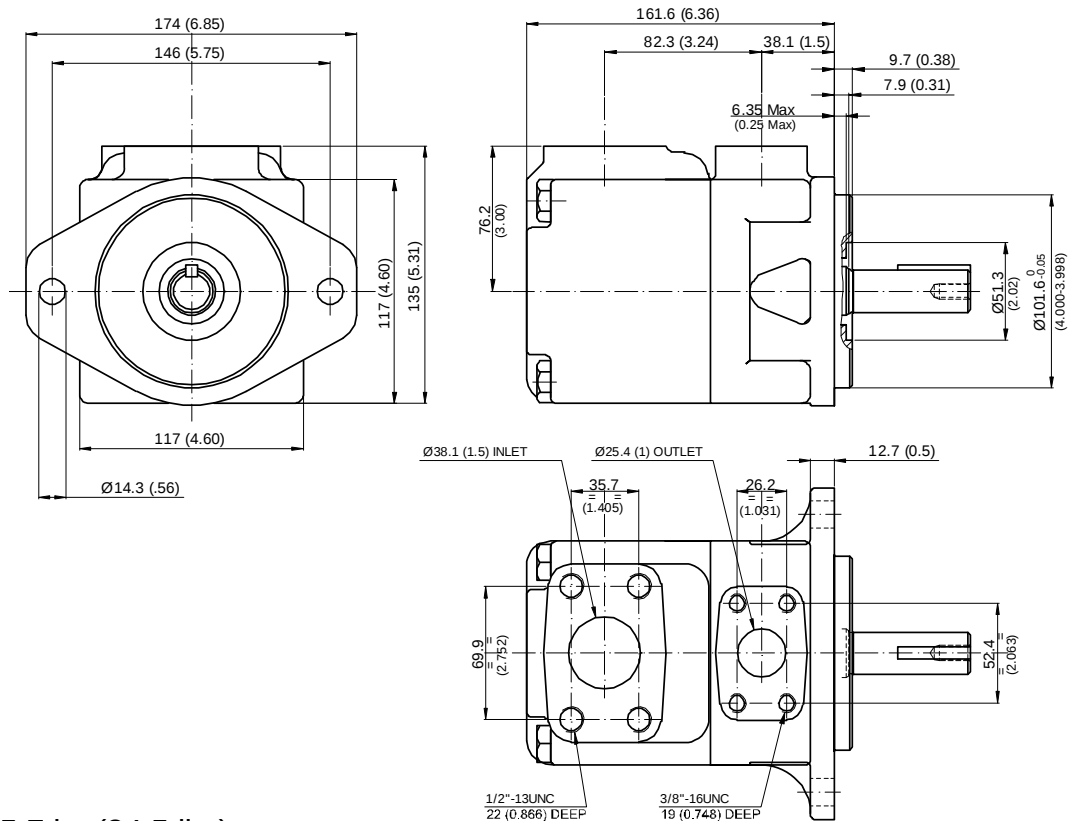

Approx weight: 15.7 kg (34.5 lbs)

## Shaft options mm (inches)

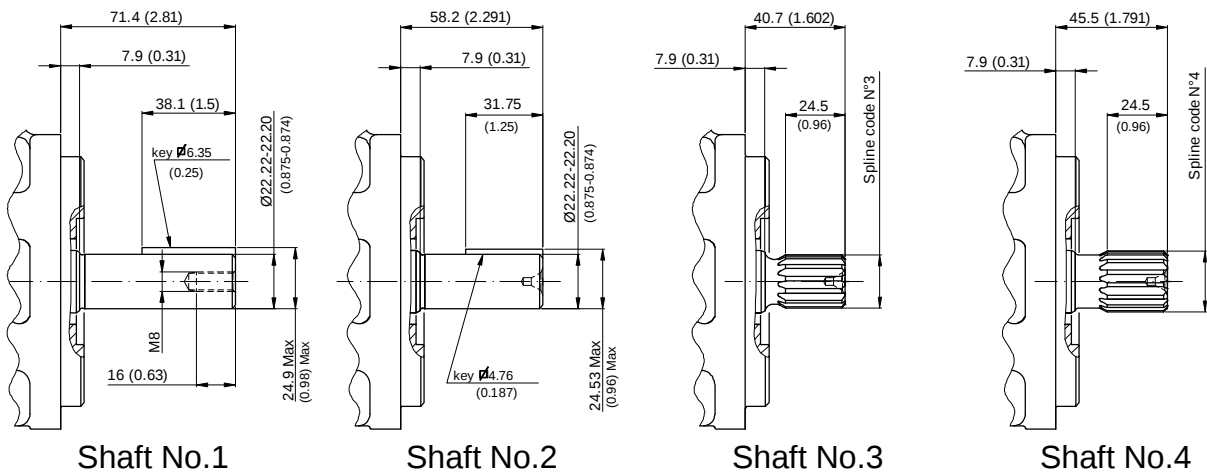


### Calculation of the max permitted torque (avoid to exceed)

| Shaft No. | (m/rev) x bar | (in3/rev) x psi |
|-----------|---------------|-----------------|
| 1         | 16500         | 14473           |
| 2         | 14300         | 12666           |
| 3         | 20600         | 18246           |
| 4         | 21821         | 19309           |


### Spline code

|                | 3                  | 4                  |
|----------------|--------------------|--------------------|
| Designation    | Sae B              | Sae B-B            |
| Pressure angle | 30°                | 30°                |
| No. of teeth   | 13                 | 15                 |
| Pitch          | 16/32 d.p.         | 16/32 d.p.         |
| Spline type    | flat root side fit | flat root side fit |
| Class          | 1- J498 b          | 1- J498 b          |


## Model code breakdown

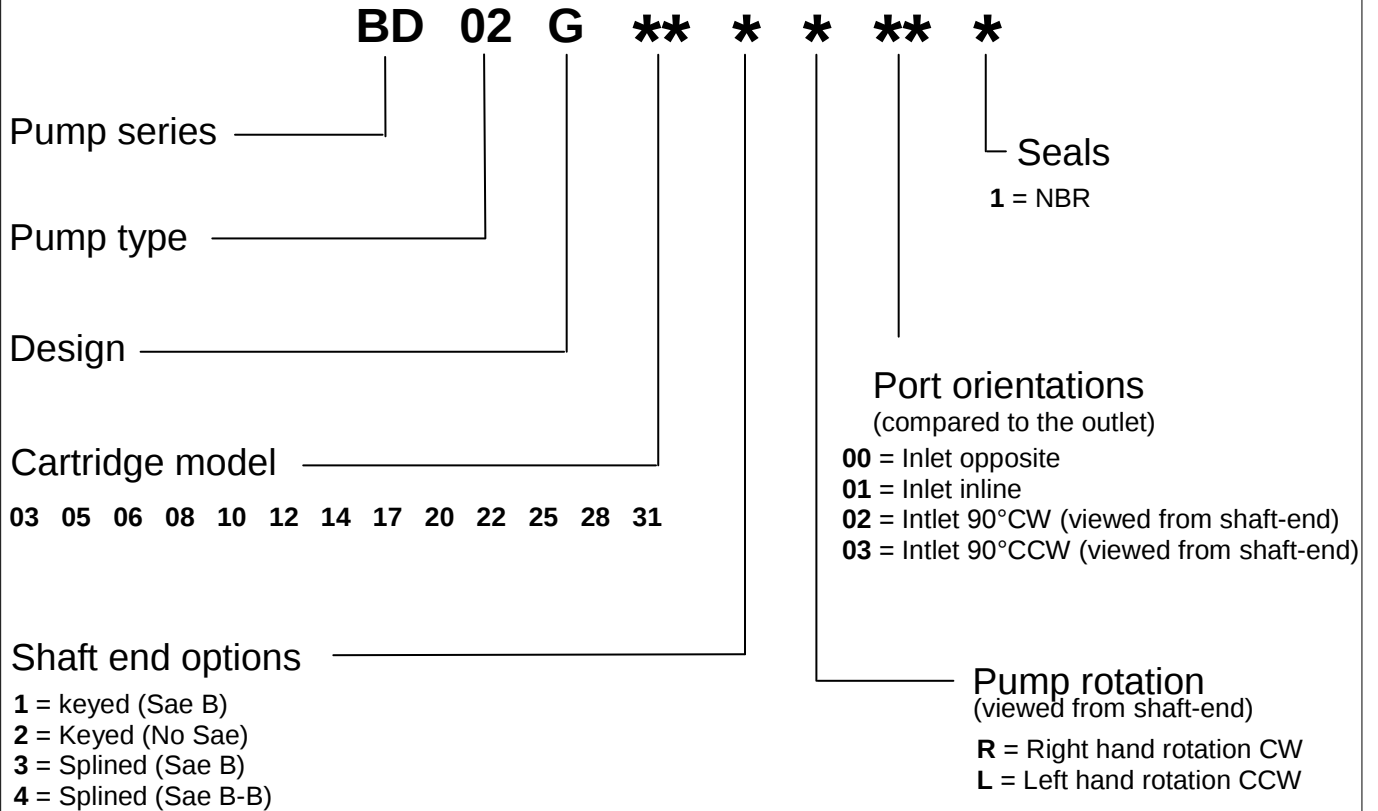

Port orientations

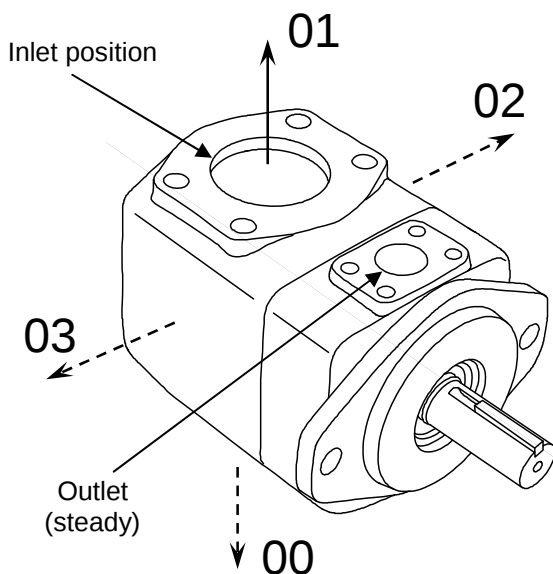

Pump rotation

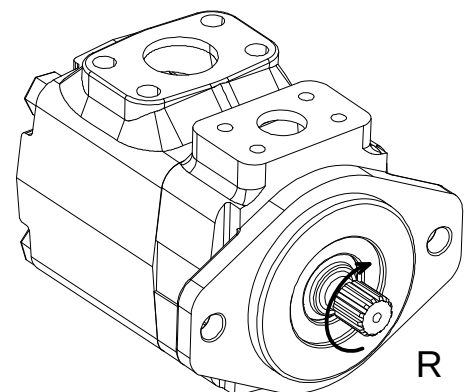

## Id. codes of pump components


| Screw                          |          |
|--------------------------------|----------|
| Part No.                       | M3002070 |
| Torque at 159 Nm (1418 lb.in.) |          |


| Type | Cartridge  |               |
|------|------------|---------------|
|      | Model      | Pump rotation |
|      | Right hand | Left hand     |
| BD02 | 03         | N0100010      |
|      | 05         | N0100030      |
|      | 06         | N0100050      |
|      | 08         | N0100070      |
|      | 10         | N0100090      |
|      | 12         | N0100110      |
|      | 14         | N0100130      |
|      | 17         | N0100150      |
|      | 20         | N0100170      |
|      | 22         | N0100190      |
|      | 25         | N0100210      |
|      | 28         | N0100230      |
|      | 31         | N0100250      |
|      |            | N0100260      |

| Shaft |          |
|-------|----------|
| Model | Part No. |
| 01    | K6021000 |
| 02    | K6022000 |
| 03    | K6023000 |
| 04    | K6024000 |

| Shaft seal |      |
|------------|------|
| Part No.   | type |
| M3020060   | NBR  |

| Pump seal kit |      |
|---------------|------|
| Part No.      | Type |
| M3020500      | NBR  |

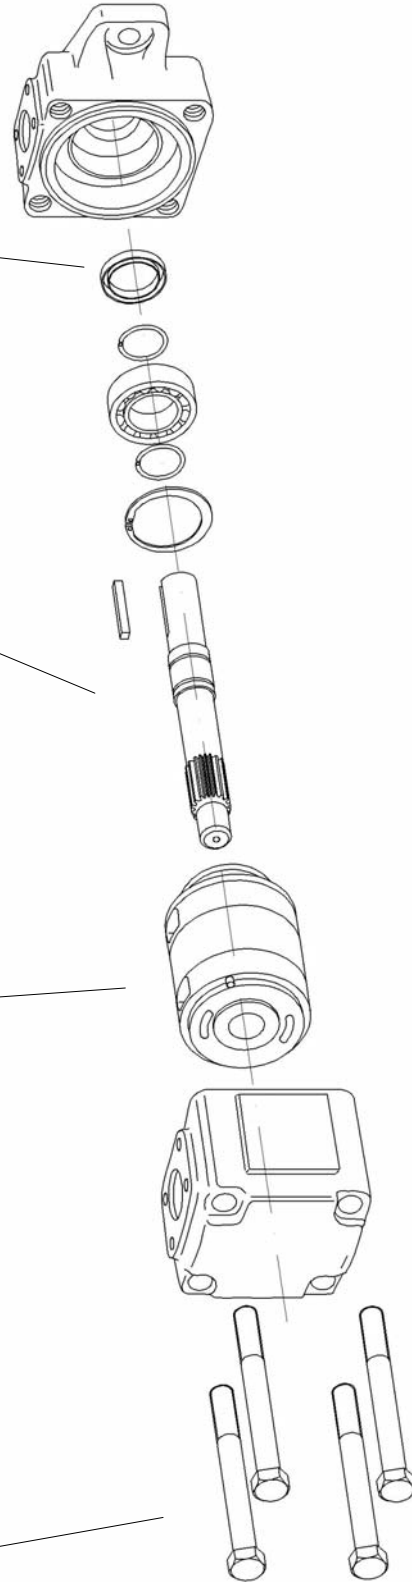

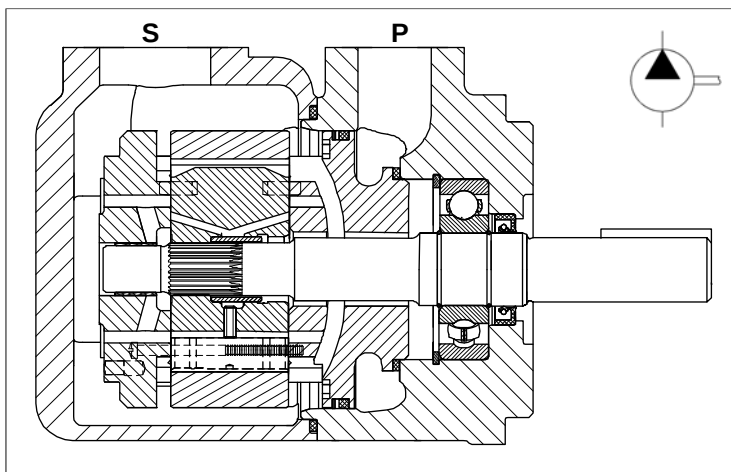

## General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in 10 different displacements from 71 to 237 l/min (from 19 to 63 gpm) at 1500 rpm and pressure 0 bar.

## Technical characteristics

| Cartridge model | Geometric displacement |                      | Rated capacity at 0 bar |         |          |         | Maximum pressure |        |           |        | Speed range |
|-----------------|------------------------|----------------------|-------------------------|---------|----------|---------|------------------|--------|-----------|--------|-------------|
|                 |                        |                      | 1200 rpm                |         | 1500 rpm |         | intermittent     |        | continuos |        |             |
|                 | ml/rev.                | (in <sup>3</sup> /r) | l/min                   | (gpm)   | l/min    | (gpm)   | bar              | (psi)  | bar       | (psi)  |             |
| 14              | 47,6                   | (2.90)               | 57,04                   | (15.09) | 71,4     | (18.89) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
| 20              | 66,0                   | (4.03)               | 79,08                   | (20.92) | 99,0     | (26.19) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
| 24              | 79,5                   | (4.85)               | 95,26                   | (25.20) | 119,3    | (31.56) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
| 28              | 89,7                   | (5.47)               | 107,50                  | (28.44) | 134,5    | (35.58) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
| 31              | 98,3                   | (6.00)               | 117,82                  | (31.17) | 147,4    | (38.99) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
| 35              | 111,0                  | (6.77)               | 133,02                  | (35.19) | 166,5    | (44.05) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
| 38              | 120,3                  | (7.34)               | 144,17                  | (38.14) | 180,4    | (47.72) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
| 42              | 136,0                  | (8.30)               | 162,99                  | (43.12) | 204,0    | (53.97) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
| 45              | 145,7                  | (8.89)               | 174,60                  | (46.19) | 218,5    | (57.80) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
| 50              | 158,0                  | (9.64)               | 189,34                  | (50.09) | 237,0    | (62.70) | 210              | (3000) | 160       | (2300) | 400 - 2200  |

**Hydraulic fluids:** antiwear petroleum base, synthetic fluid, water glycols and invert emulsions.

**Viscosity range / Viscosity index:** with antiwear petroleum base, from 10 to 2000 cSt. (10 to 108 cSt. recommended). Other fluids from 18 to 2000 c.St. (18 to 108 c.St. recomm.). Choose 30 c.St. for max life-time. *Viscosity index:* 90° min.

**Filtration:** to maintain contamination level to ISO 18/14 or NAS 1638 class 8.

Filters: for the inlet, use strainer with mesh not less than 149 micron abs. (omit strainer with application requiring cold start or when using fire resistant fluids); for the return line - 25 micron abs. or better.

**Water contamination level:** max 0.10% for mineral oil. With other fluids, max 0.05%

**Intermittent pressure:** typically the working time permitted at such pressure is < 30% of the duty cycle. With duty cycles longer than 15 minutes, please contact the technical office of B&C.


**Minimum inlet pressure:** (with mineral oil 10-65 c.St.): 0,8 bar abs. (3 psi abs.). In the biggest displacements of each series and with the highest speeds, is required an higher inlet pressure. Please consult the specific section for details. In case of tandem pump, supply the inlet port with the highest pressure requested among the pump stages.

**Operating temperature:** with "antiwear petroleum base" the permitted temperature is: from -18 to +100° C; with water glycol and "water in oil emulsion": from +10 to +50°C; with syntetic fluid: from -18 to +70°C; with rapeseed and esters: from -20 to + 70°C. During cold start the pumps should be operated at low speed and pressure until fluid warms up to an acceptable viscosity for full power operation.


**Drive:** direct and coaxial by means of a flexible coupling. Low axial and radial loads allowed. Consult specific section for more detail.

## Main operating data

**max pressure / fluid type**

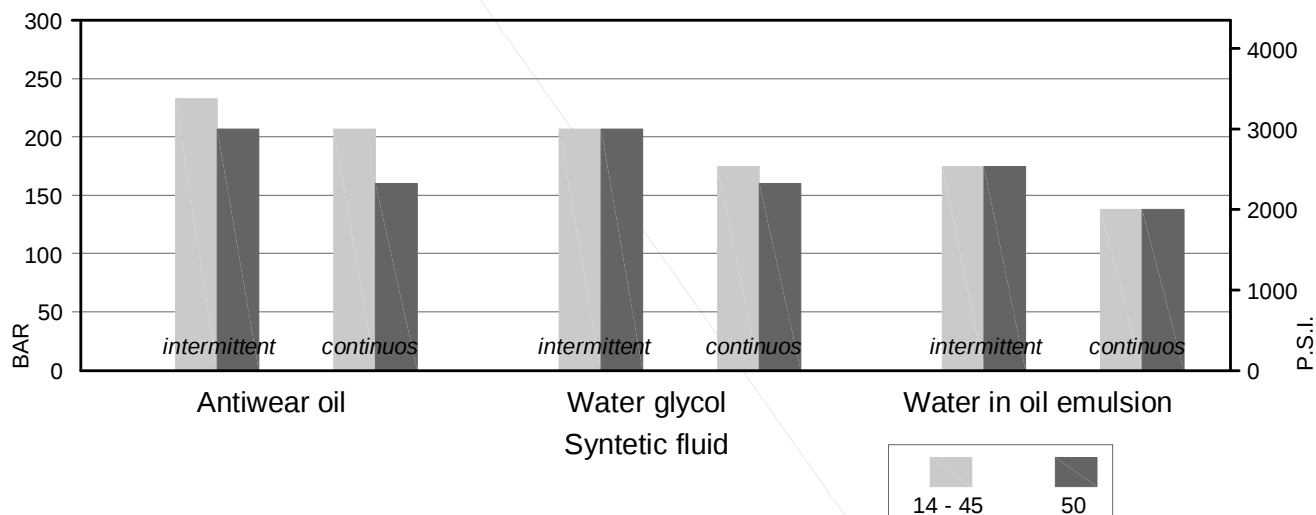

**max speed / fluid type**

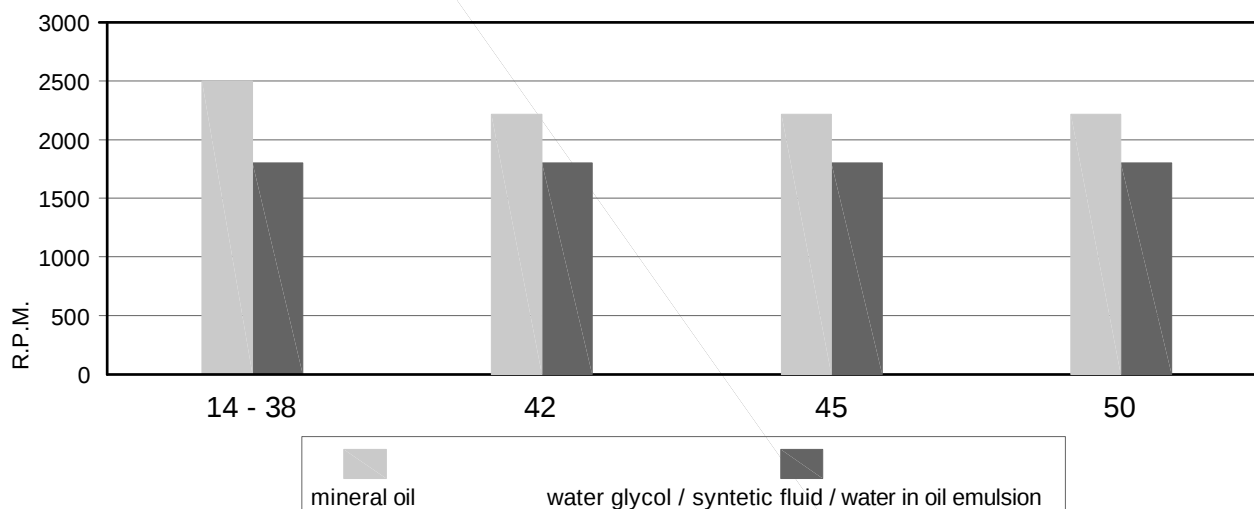

**min. allowable inlet pressure / rotation speed (abs. bar)\***


| Speed<br>r.p.m. | from 14<br>to 20 | 24   | 28   | 31   | 35   | 38   | 42   | 45   | 50   |
|-----------------|------------------|------|------|------|------|------|------|------|------|
| 2500            | 1.00             | 1.10 | 1.18 | 1.23 | 1.29 | 1.29 | -    | -    | -    |
| 2300            | 0.95             | 0.95 | 1.00 | 1.00 | 1.02 | 1.05 | 1.08 | -    | -    |
| 2200            | 0.88             | 0.88 | 0.92 | 0.95 | 0.98 | 1.00 | 1.02 | 1.05 | 1.09 |
| 2100            | 0.80             | 0.82 | 0.85 | 0.90 | 0.92 | 0.95 | 0.95 | 0.98 | 1.02 |
| 1800            | 0.80             | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.85 | 0.85 |
| 1500            | 0.80             | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| 1200            | 0.80             | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |

\* measured inside the inlet flange; with petroleum base fluid (visc. 10 to 65 cSt.).


Multiply the abs. pressure by 1.25 when using water-glycol or "water in oil emulsion", by 1.35 with synthetic fluids, and by 1.1 with ester or rapeseed base.

## Main operating data


**noise level** (model 38 with fluid viscosity 32 c.St., inlet 0.9 bar abs.)

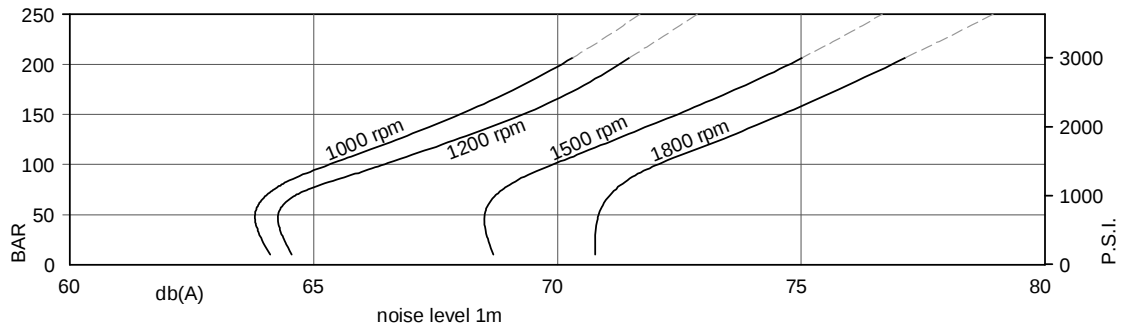


**allowable radial load** (max. permissible axial load =80 daN)

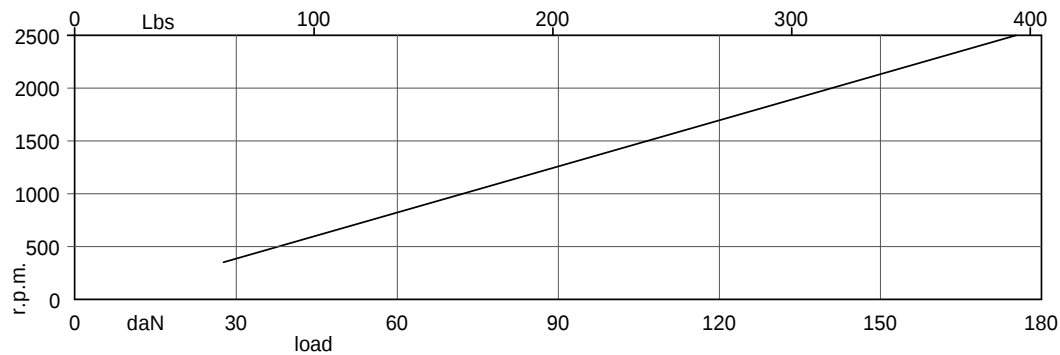

**power loss** (typical)

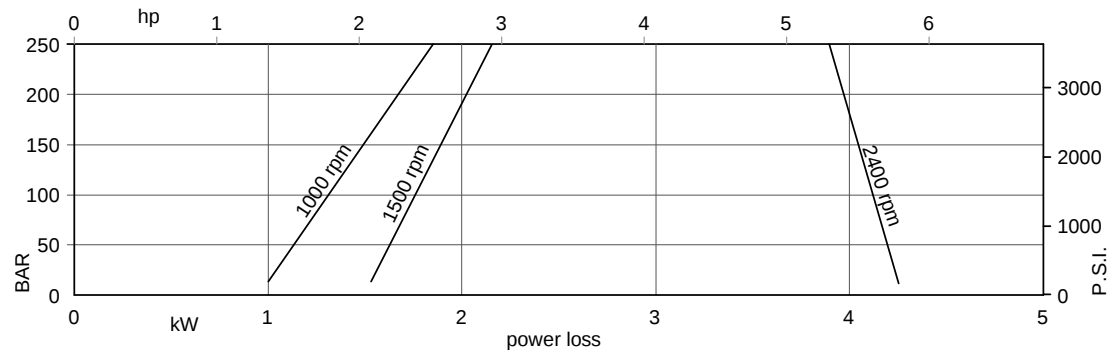

**Typical internal leakage \***

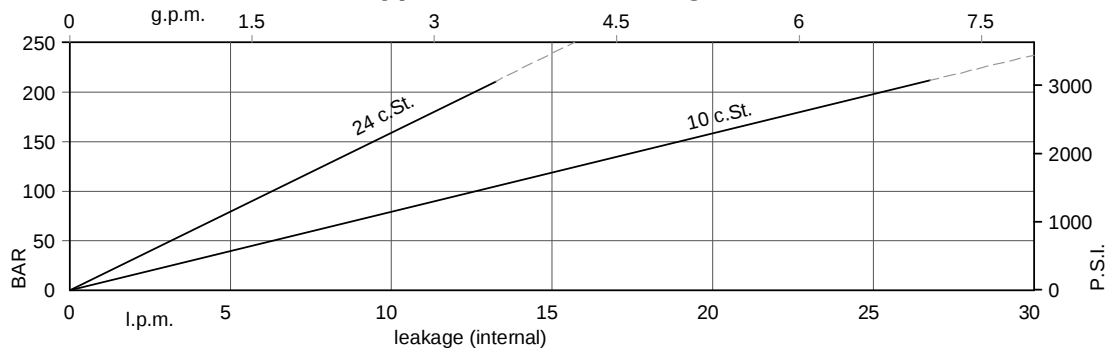

\* If the internal leakage is more than 50% of the theoretical flow, do not operate the pump

## Main operating data

Typical: 24 c.St. (115 SUS)




| Cartridge model         | Geometric displacement |                      | Speed rpm | 140 bar |         | 240 bar             |                       | Input power (kW) |                    |                     |
|-------------------------|------------------------|----------------------|-----------|---------|---------|---------------------|-----------------------|------------------|--------------------|---------------------|
|                         | ml/rev.                | (in <sup>3</sup> /r) |           | l/min   | (gpm)   | l/min               | (gpm)                 | 7 bar (100 psi)  | 140 bar (2000 psi) | 240 bar (3500 psi)  |
| <b>14</b>               | 47,6                   | (2.90)               | 1000      | 38,3    | (10.13) | 32,1                | (8.49)                | 1.50             | 12.50              | 20.70               |
|                         |                        |                      | 1200      | 48,8    | (12.91) | 42,6                | (11.27)               | 1.80             | 14.43              | 24.44               |
|                         |                        |                      | 1500      | 62,1    | (16.43) | 55,9                | (14.79)               | 2.30             | 18.50              | 30.60               |
|                         |                        |                      | 1800      | 77,3    | (20.46) | 71,1                | (18.82)               | 2.96             | 21.57              | 36.31               |
| <b>20</b>               | 66,0                   | (4.03)               | 1000      | 56,7    | (15.00) | 50,5                | (13.36)               | 1.70             | 16.80              | 28.00               |
|                         |                        |                      | 1200      | 70,8    | (18.74) | 64,6                | (17.10)               | 2.05             | 19.44              | 33.20               |
|                         |                        |                      | 1500      | 89,7    | (23.73) | 83,5                | (22.09)               | 2.80             | 24.90              | 41.70               |
|                         |                        |                      | 1800      | 110,4   | (29.21) | 104,2               | (27.57)               | 3.33             | 29.09              | 49.47               |
| <b>24</b>               | 79,5                   | (4.85)               | 1000      | 70,2    | (18.57) | 64,0                | (16.93)               | 1.90             | 19.90              | 33.40               |
|                         |                        |                      | 1200      | 87,02   | (23.02) | 80,8                | (21.38)               | 2.23             | 23.11              | 39.63               |
|                         |                        |                      | 1500      | 110,0   | (29.10) | 103,8               | (27.46)               | 3.00             | 29.60              | 49.80               |
|                         |                        |                      | 1800      | 134,7   | (35.63) | 128,5               | (33.99)               | 3.61             | 34.61              | 59.12               |
| <b>28</b>               | 89,7                   | (5.47)               | 1000      | 80,4    | (21.27) | 74,2                | (19.63)               | 2.00             | 22.30              | 37.50               |
|                         |                        |                      | 1200      | 99,3    | (26.26) | 93,1                | (24.62)               | 2.37             | 25.89              | 44.49               |
|                         |                        |                      | 1500      | 125,2   | (33.12) | 119,0               | (31.48)               | 3.20             | 33.20              | 55.90               |
|                         |                        |                      | 1800      | 153,0   | (40.48) | 146,1               | (38.64)               | 3.82             | 38.77              | 66.41               |
| <b>31</b>               | 98,3                   | (6.00)               | 1000      | 89,0    | (23.54) | 82,8                | (21.90)               | 2.10             | 24.30              | 40.90               |
|                         |                        |                      | 1200      | 109,6   | (28.99) | 103,4               | (27.35)               | 2.49             | 28.23              | 48.59               |
|                         |                        |                      | 1500      | 138,1   | (36.53) | 131,9               | (34.89)               | 3.30             | 36.20              | 61.00               |
|                         |                        |                      | 1800      | 168,5   | (44.57) | 162,3               | (42.93)               | 4.00             | 42.28              | 72.55               |
| <b>35</b>               | 111,0                  | (6.77)               | 1000      | 101,7   | (26.90) | 95,5                | (25.26)               | 2.30             | 27.30              | 46.00               |
|                         |                        |                      | 1200      | 124,8   | (33.01) | 118,6               | (31.37)               | 2.66             | 31.68              | 54.64               |
|                         |                        |                      | 1500      | 157,2   | (41.59) | 151,0               | (39.95)               | 3.50             | 40.70              | 68.70               |
|                         |                        |                      | 1800      | 191,3   | (50.61) | 185,1               | (48.97)               | 4.25             | 47.47              | 81.63               |
| <b>38</b>               | 120,3                  | (7.34)               | 1000      | 111,0   | (29.37) | 104,8               | (27.72)               | 2.40             | 29.40              | 49.80               |
|                         |                        |                      | 1200      | 135,9   | (35.96) | 129,7               | (34.32)               | 2.79             | 36.42              | 59.07               |
|                         |                        |                      | 1500      | 171,1   | (45.26) | 164,9               | (43.62)               | 3.70             | 43.90              | 74.30               |
|                         |                        |                      | 1800      | 208,0   | (55.03) | 201,8               | (53.39)               | 4.45             | 51.27              | 88.28               |
| <b>42 <sup>1)</sup></b> | 136,0                  | (8.30)               | 1000      | 126,7   | (33.52) | 120,5               | (31.88)               | 2.60             | 33.10              | 56.00               |
|                         |                        |                      | 1200      | 154,7   | (40.94) | 148,6               | (39.30)               | 3.00             | 38.49              | 66.56               |
|                         |                        |                      | 1500      | 194,7   | (51.51) | 188,5               | (49.87)               | 4.00             | 49.40              | 83.70               |
|                         |                        |                      | 1800      | 236,3   | (62.50) | 230,1               | (60.86)               | 4.76             | 57.68              | 99.50               |
| <b>45 <sup>1)</sup></b> | 145,7                  | (8.89)               | 1000      | 136,4   | (36.08) | 130,2               | (34.44)               | 2.70             | 35.30              | 59.90               |
|                         |                        |                      | 1200      | 166,4   | (44.01) | 160,2               | (42.37)               | 3.14             | 41.14              | 71.18               |
|                         |                        |                      | 1500      | 209,2   | (55.34) | 203,0               | (53.70)               | 4.10             | 52.80              | 89.50               |
|                         |                        |                      | 1800      | 253,7   | (67.11) | 247,5               | (65.47)               | 4.96             | 61.64              | 106.43              |
| <b>50 <sup>1)</sup></b> | 158,0                  | (9.64)               | 1000      | 148,7   | (39.34) | 145,0 <sup>2)</sup> | (38.36) <sup>2)</sup> | 2.80             | 38.20              | 56.80 <sup>2)</sup> |
|                         |                        |                      | 1200      | 181,1   | (47.91) | 176,6 <sup>2)</sup> | (46.73) <sup>2)</sup> | 3.30             | 44.48              | 66.19 <sup>2)</sup> |
|                         |                        |                      | 1500      | 227,7   | (30.24) | 224,0 <sup>2)</sup> | (59.26) <sup>2)</sup> | 4.40             | 57.00              | 85.00 <sup>2)</sup> |
|                         |                        |                      | 1800      | 275,8   | (72.96) | 271,3 <sup>2)</sup> | (71.78) <sup>2)</sup> | 5.21             | 66.67              | 99.02 <sup>2)</sup> |

- Internal leakage exceeding 50% of the theoretical flow

1) 2200 r.p.m. max.


2) 210 bar (3000 p.s.i.) max. int.

## Installation dimensions

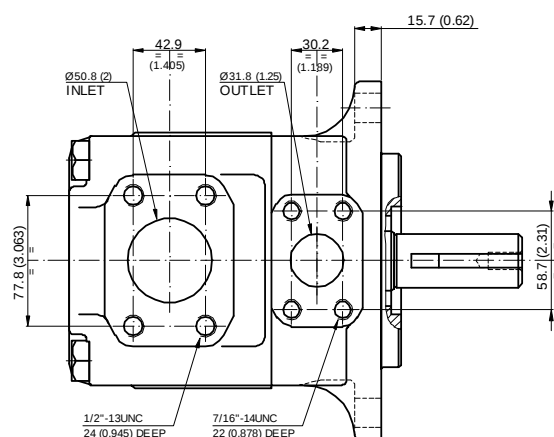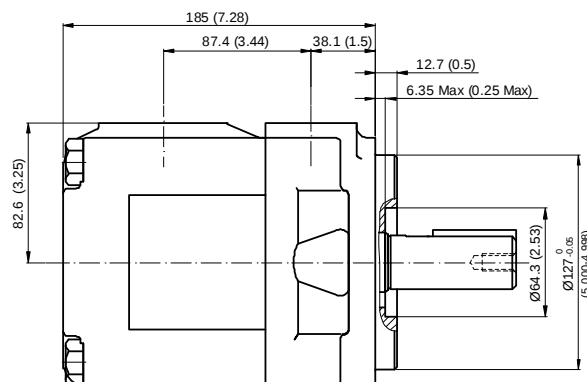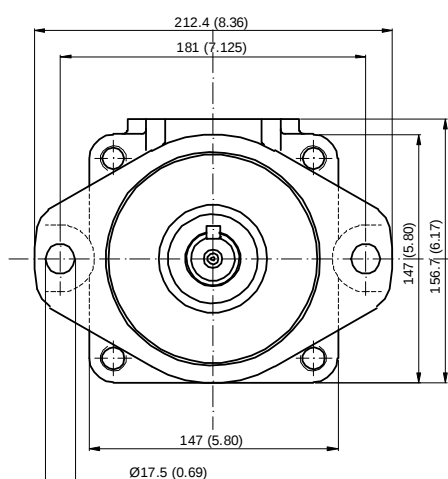


Approx weight: 24 kg (52.7 lbs)


### Shaft options      mm (inches)

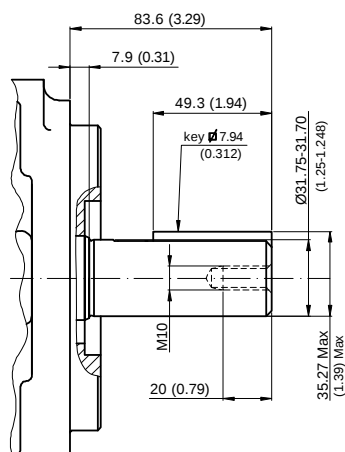

## Shaft No.1

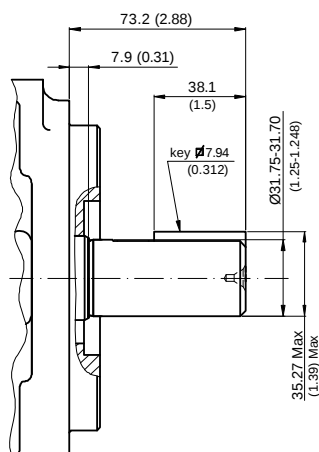

### Shaft No.2

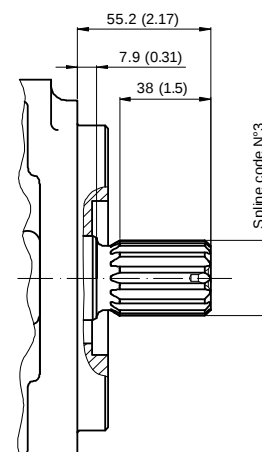

### Shaft No.3

**Calculation of the max permitted torque:**  
(avoid to exceed)

| Shaft No. | (ml/rev) x bar | (in3/rev) x psi |
|-----------|----------------|-----------------|
| 1         | 43283          | 38299           |
| 2         | 34590          | 30638           |
| 3         | 61200          | 54207           |

### Spline code

3

|                |                    |
|----------------|--------------------|
| Designation    | Sae C              |
| Pressure angle | 30°                |
| No. of teeth   | 14                 |
| Pitch          | 12/24 d.p.         |
| Spline type    | flat root side fit |
| Class          | 1- J498 b          |

## Model code breakdown

**BD 04 G \*\* \* \* \*\* \***

## Pump series

Pump type

## Design

## Cartridge model

14 20 24 28 31 35 38 42 45 50

## Shaft end options

1 = keyed (Sae C)  
2 = Keyed (No Sae)  
3 = Splined (Sae C)

## Seals

**1 = NBR**

- Port orientations

(Viewed from cover end)

**00** = Inlet opposite outlet  
**01** = Inlet inline with outlet

**02** = Inlet 90°CW from outlet

**03** = Intlet 90°CCW from outlet


## Rotation

Rotation  
(viewed from shaft-end)


**R** = Right hand rotation CW

**L** = Left hand rotation CCW

## Port orientations

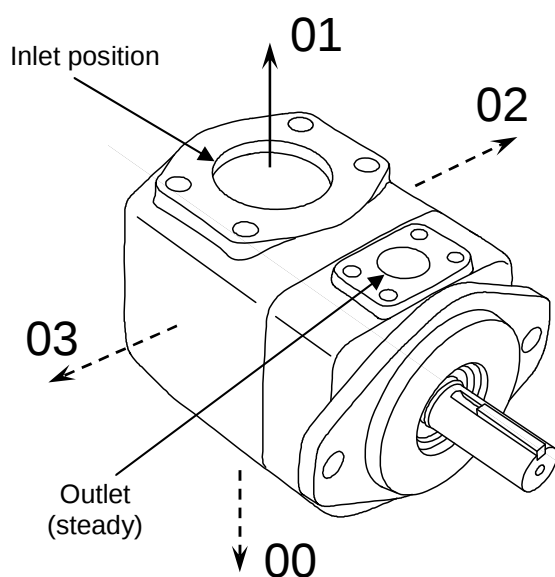

## Pump rotation

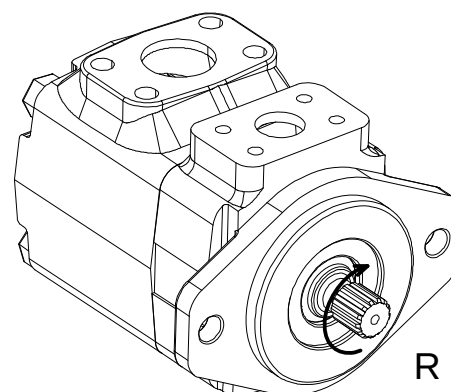

# Id. codes of pump components


| Screw                          |          |
|--------------------------------|----------|
| Part No.                       | M3040070 |
| Torque at 187 Nm (1668 lb.in.) |          |


| Cartridge |       |                      |
|-----------|-------|----------------------|
| Type      | Model | Pump rotation        |
|           |       | Right hand Left hand |
| BD04      | 14    | N0200010 N0200020    |
|           | 20    | N0200050 N0200060    |
|           | 24    | N0200070 N0200080    |
|           | 28    | N0200090 N0200100    |
|           | 31    | N0200110 N0200120    |
|           | 35    | N0200130 N0200140    |
|           | 38    | N0200150 N0200160    |
|           | 42    | N0200170 N0200180    |
|           | 45    | N0200190 N0200200    |
|           | 50    | N0200210 N0200220    |

| Shaft |          |
|-------|----------|
| Model | Part No. |
| 01    | K6041000 |
| 02    | K6042000 |
| 03    | K6043000 |

| Shaft seal |      |
|------------|------|
| Part No.   | type |
| M3040060   | NBR  |

| Pump seal kit |      |
|---------------|------|
| Part No.      | Type |
| M3040500      | NBR  |

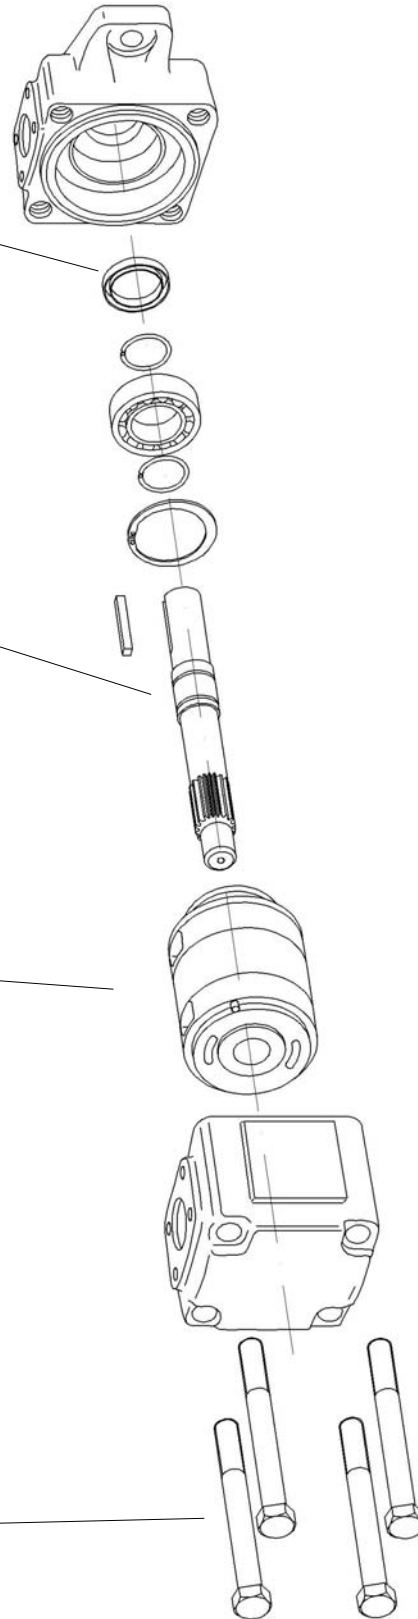

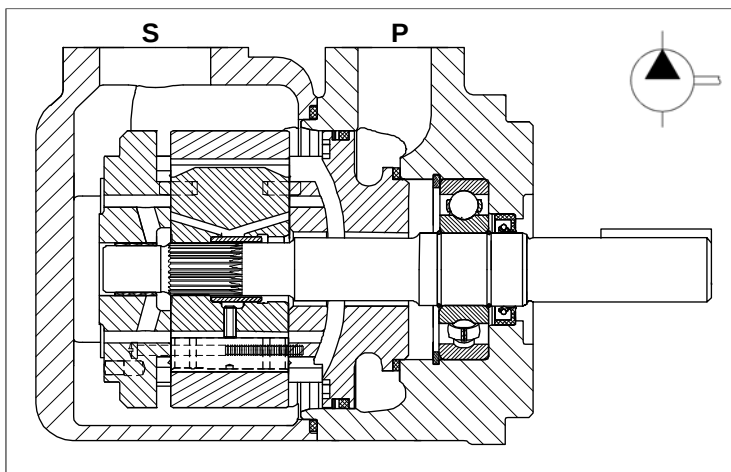

## General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in 6 different displacements from 214 to 341 l/min (from 56 to 90 gpm) at 1500 rpm and pressure 0 bar.

## Technical characteristics

| Cartridge model | Geometric displacement |                      | Rated capacity at 0 bar |         |          |         | Maximum pressure |        |           |        | Speed range |
|-----------------|------------------------|----------------------|-------------------------|---------|----------|---------|------------------|--------|-----------|--------|-------------|
|                 |                        |                      | 1200 rpm                |         | 1500 rpm |         | intermittent     |        | continuos |        |             |
|                 | ml/rev.                | (in <sup>3</sup> /r) | l/min                   | (gpm)   | l/min    | (gpm)   | bar              | (psi)  | bar       | (psi)  |             |
| 45              | 142,4                  | (8.69)               | 170.7                   | (45.15) | 213.6    | (56.51) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
| 50              | 158,5                  | (9.67)               | 189.9                   | (50.25) | 237.7    | (62.88) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
| 52              | 164,8                  | (10.06)              | 197.5                   | (52.25) | 247.2    | (65.40) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
| 62              | 196,7                  | (12.00)              | 235.7                   | (62.36) | 295.0    | (78.04) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
| 66              | 213,3                  | (13.02)              | 255.6                   | (67.62) | 319.9    | (84.63) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
| 72              | 227,1                  | (13.86)              | 272.2                   | (72.00) | 340.6    | (90.11) | 240              | (3500) | 210       | (3000) | 400 - 2200  |

**Hydraulic fluids:** antiwear petroleum base, synthetic fluid, water glycols and invert emulsions.

**Viscosity range / Viscosity index:** with antiwear petroleum base, from 10 to 2000 cSt. (10 to 108 cSt. recommended). Other fluids from 18 to 2000 cSt. (18 to 108 cSt. recommended). Choose 30 cSt. for max lifetime. *Viscosity index:* 90° min.

**Filtration:** to maintain contamination level to ISO 18/14 or NAS 1638 class 8.

Filters: for the inlet, use strainer with mesh not less than 149 micron abs. (omit strainer with application requiring cold start or when using fire resistant fluids); for the return line - 25 micron abs. or better.

**Water contamination level:** max 0.10% for mineral oil. With other fluids, max 0.05%

**Intermittent pressure:** typically the working time permitted at such pressure is < 30% of the duty cycle. With duty cycles longer than 15 minutes, please contact the technical office of B&C


**Minimum inlet pressure** (with mineral oil 10-65 cSt.): 0,8 bar abs. (3 psi abs.). In the biggest displacements of each series and with the highest speeds, is required an higher inlet pressure. Please consult the specific section for details. In case of tandem pump, supply the inlet port with the highest pressure requested among the pump stages.

**Operating temperature:** with "antiwear petroleum base" the permitted temperature is: from -18 to +100°C; with water glycol and "water in oil emulsion": from +10 to +50°C; with syntetic fluid: from -18 to +70°C; with rapeseed and esters: from -20 to + 70°C. During cold start the pumps should be operated at low speed and pressure until fluid warms up to an acceptable viscosity for full power operation.


**Drive:** direct and coaxial by means of a flexible coupling. Low axial and radial loads allowed. Consult specific section for more detail.

## Main operating data

**max pressure / fluid type**

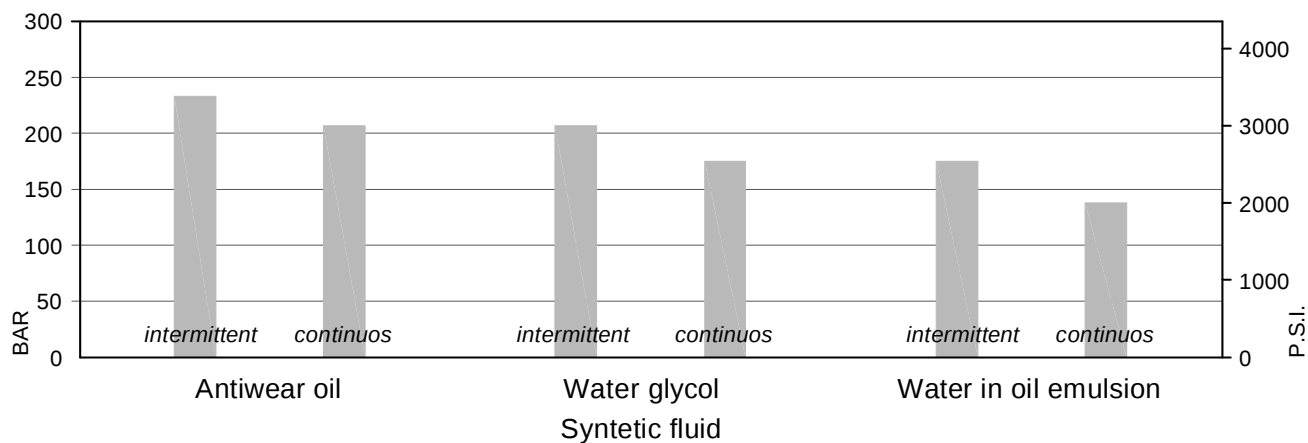

**max speed / fluid type**

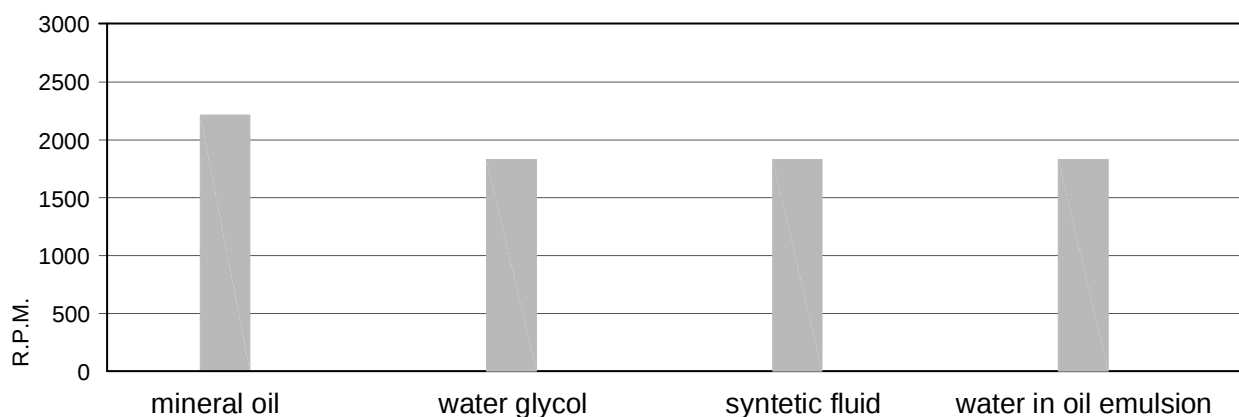


**min. allowable inlet pressure / rotation speed (abs. bar)\***

| Speed<br>r.p.m. | 45   | 50   | 52   | 62   | 66   | 72   |
|-----------------|------|------|------|------|------|------|
| 2200            | 1.00 | 1.00 | 1.00 | 1.00 | 1.09 | 1.05 |
| 2100            | 0.90 | 0.90 | 0.90 | 0.95 | 1.00 | 1.00 |
| 1800            | 0.80 | 0.80 | 0.80 | 0.85 | 0.95 | 0.85 |
| 1500            | 0.80 | 0.80 | 0.80 | 0.80 | 0.85 | 0.85 |
| 1200            | 0.80 | 0.80 | 0.80 | 0.80 | 0.85 | 0.85 |


\* measured inside the inlet flange; with petroleum base fluid (visc. 10 to 65 cSt.).  
Multiply the abs. pressure by 1.25 when using water-glycol or "water in oil emulsion", by 1.35 with synthetic fluids, and by 1.1 with ester or rapeseed base.

## Main operating data

**noise level** (model 50, with fluid viscosity 32 c.St., inlet 0.9 bar abs.)

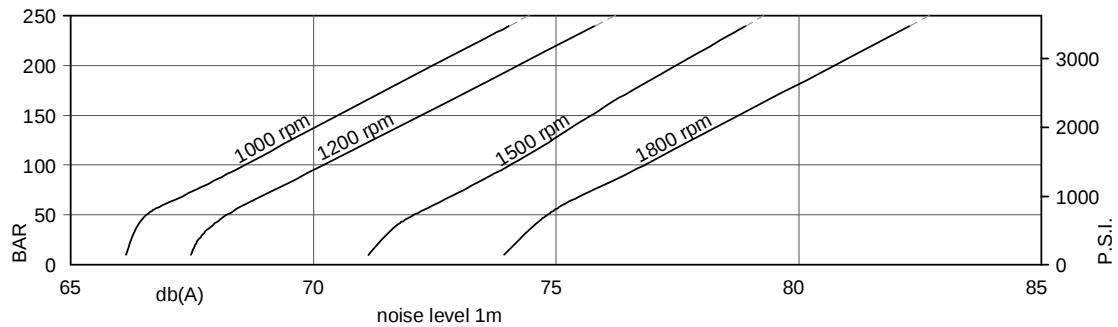


**allowable radial load \*** (max. permissible axial load =200 daN)

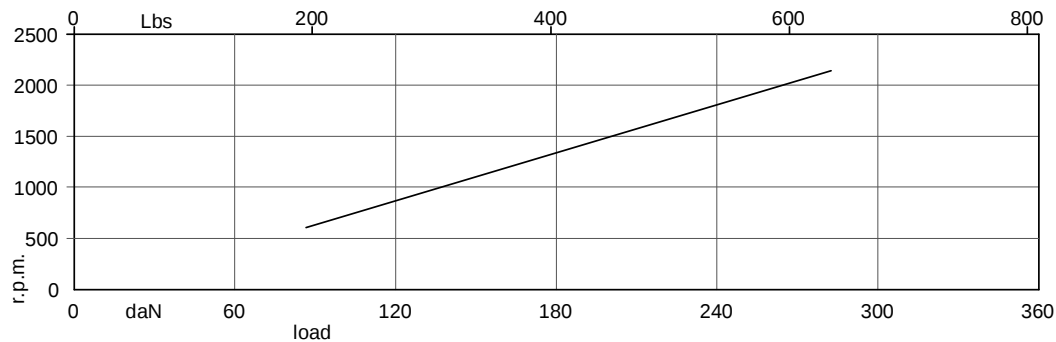


\* Positioned in the middle of the key, in the No. 1 shaft

**power loss** (typical with 24 c.St.)

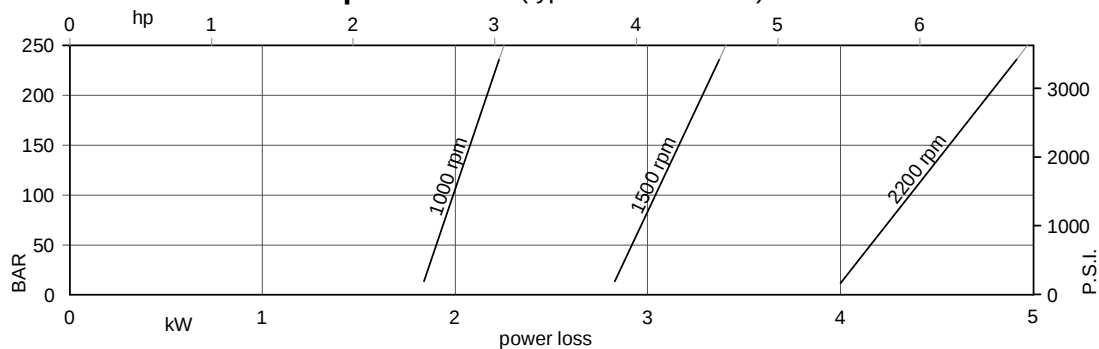

**Typical internal leakage**

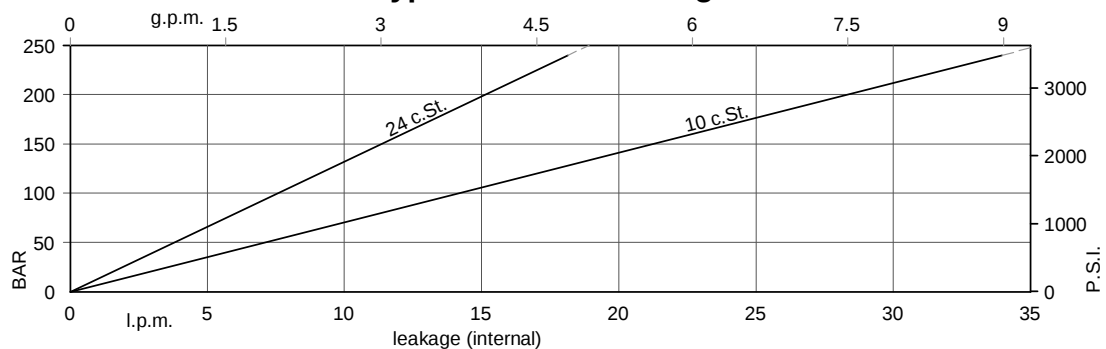




## Main operating data

Typical: 24 c.St. (115 SUS)

| Cartridge model | Geometric displacement |                      | Speed rpm | 140 bar |          | 240 bar |          | Input power (kW) |                    |                    |
|-----------------|------------------------|----------------------|-----------|---------|----------|---------|----------|------------------|--------------------|--------------------|
|                 | ml/rev.                | (in <sup>3</sup> /r) |           | l/min   | (gpm)    | l/min   | (gpm)    | 7 bar (100 psi)  | 140 bar (2000 psi) | 240 bar (3500 psi) |
| <b>45</b>       | 142,4                  | (8.69)               | 1000      | 132,4   | (35.03)  | 125,3   | (33.15)  | 3.40             | 35.30              | 59.20              |
|                 |                        |                      | 1200      | 161,0   | (42.60)  | 154,0   | (40.75)  | 3.18             | 40.24              | 69.43              |
|                 |                        |                      | 1500      | 203,6   | (53.86)  | 196,5   | (51.98)  | 5.40             | 52.90              | 88.70              |
|                 |                        |                      | 1800      | 246,3   | (65.17)  | 239,3   | (63.32)  | 5.05             | 60.36              | 104.05             |
| <b>50</b>       | 158,5                  | (9.67)               | 1000      | 148,5   | (39.29)  | 141,4   | (37.41)  | 3.50             | 39.00              | 65.60              |
|                 |                        |                      | 1200      | 180,3   | (47.70)  | 173,3   | (45.85)  | 3.40             | 44.62              | 77.10              |
|                 |                        |                      | 1500      | 227,7   | (60.24)  | 220,6   | (58.36)  | 5.70             | 58.50              | 98.30              |
|                 |                        |                      | 1800      | 275,3   | (72.83)  | 268,3   | (70.98)  | 5.38             | 66.93              | 115.55             |
| <b>52</b>       | 164,8                  | (10.06)              | 1000      | 154,8   | (40.95)  | 147,7   | (39.07)  | 3.60             | 40.50              | 68.20              |
|                 |                        |                      | 1200      | 187,9   | (49.70)  | 180,9   | (47.85)  | 3.49             | 46.33              | 80.10              |
|                 |                        |                      | 1500      | 237,2   | (62.75)  | 230,1   | (60.87)  | 5.80             | 60.80              | 102.10             |
|                 |                        |                      | 1800      | 286,6   | (75.82)  | 279,6   | (73.97)  | 5.51             | 69.50              | 120.05             |
| <b>62</b>       | 196,7                  | (12.00)              | 1000      | 186,7   | (49.39)  | 179,6   | (47.51)  | 4.00             | 47.90              | 80.90              |
|                 |                        |                      | 1200      | 226,1   | (59.81)  | 219,1   | (57.96)  | 3.93             | 55.01              | 95.28              |
|                 |                        |                      | 1500      | 285,0   | (75.40)  | 277,9   | (73.52)  | 6.40             | 71.90              | 121.30             |
|                 |                        |                      | 1800      | 343,9   | (90.99)  | 336,9   | (89.14)  | 6.16             | 82.51              | 142.83             |
| <b>66</b>       | 213,3                  | (13.02)              | 1000      | 203,3   | (53.78)  | 196,2   | (51.90)  | 4.20             | 51.80              | 87.60              |
|                 |                        |                      | 1200      | 246,0   | (65.07)  | 239,0   | (63.22)  | 4.15             | 59.52              | 103.18             |
|                 |                        |                      | 1500      | 309,9   | (81.98)  | 302,8   | (80.11)  | 6.70             | 77.70              | 131.20             |
|                 |                        |                      | 1800      | 373,8   | (98.89)  | 366,8   | (97.04)  | 6.50             | 89.29              | 154.68             |
| <b>72</b>       | 227,1                  | (13.86)              | 1000      | 217,1   | (57.43)  | 210,0   | (55.56)  | 4.30             | 55.00              | 93.10              |
|                 |                        |                      | 1200      | 262,5   | (69.45)  | 255,5   | (67.60)  | 4.34             | 63.27              | 109.75             |
|                 |                        |                      | 1500      | 330,6   | (87.46)  | 323,5   | (85.58)  | 6.90             | 82.60              | 139.50             |
|                 |                        |                      | 1800      | 398,6   | (105.45) | 391,6   | (103.60) | 6.78             | 94.92              | 164.54             |

## Installation dimensions


mm (inches)

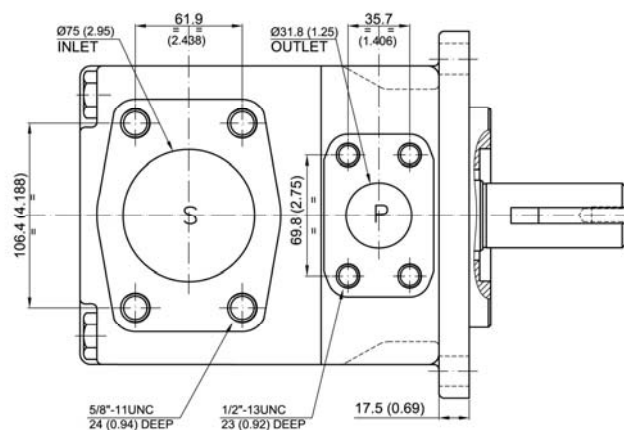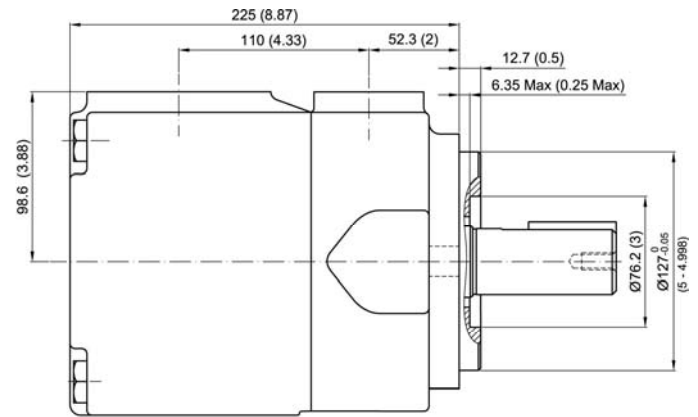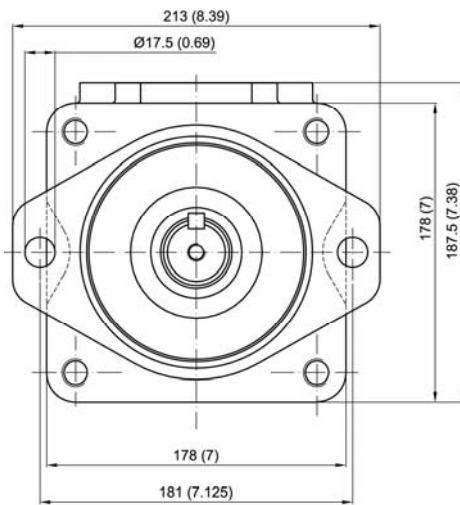


Approx weight: 43.3 kg (386 lbs)

## Shaft options


mm (inches)

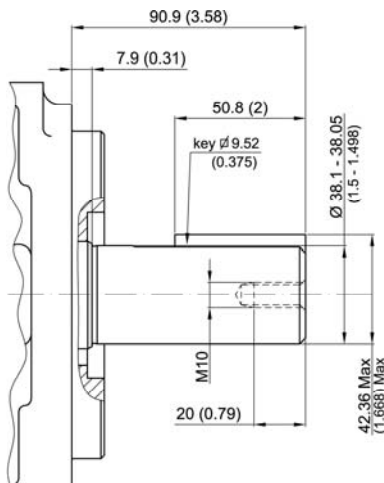

Shaft No.1

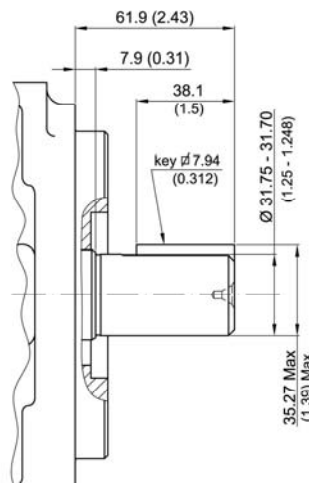

Shaft No.2

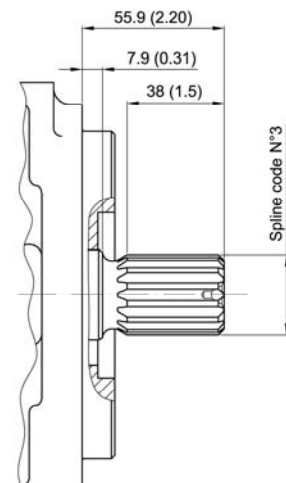

Shaft No.3

**Calculation of the max permitted torque:**  
(avoid to exceed)


| Shaft No. | (ml/rev) x bar | (in3/rev) x psi |
|-----------|----------------|-----------------|
| 1         | 54555          | 48273           |
| 2         | 34590          | 30638           |
| 3         | 61200          | 54207           |

**Spline code**


**3**

|                |                    |
|----------------|--------------------|
| Designation    | Sae C              |
| Pressure angle | 30°                |
| No. of teeth   | 14                 |
| Pitch          | 12/24 d.p.         |
| Spline type    | flat root side fit |
| Class          | 1- J498 b          |


## Model code breakdown

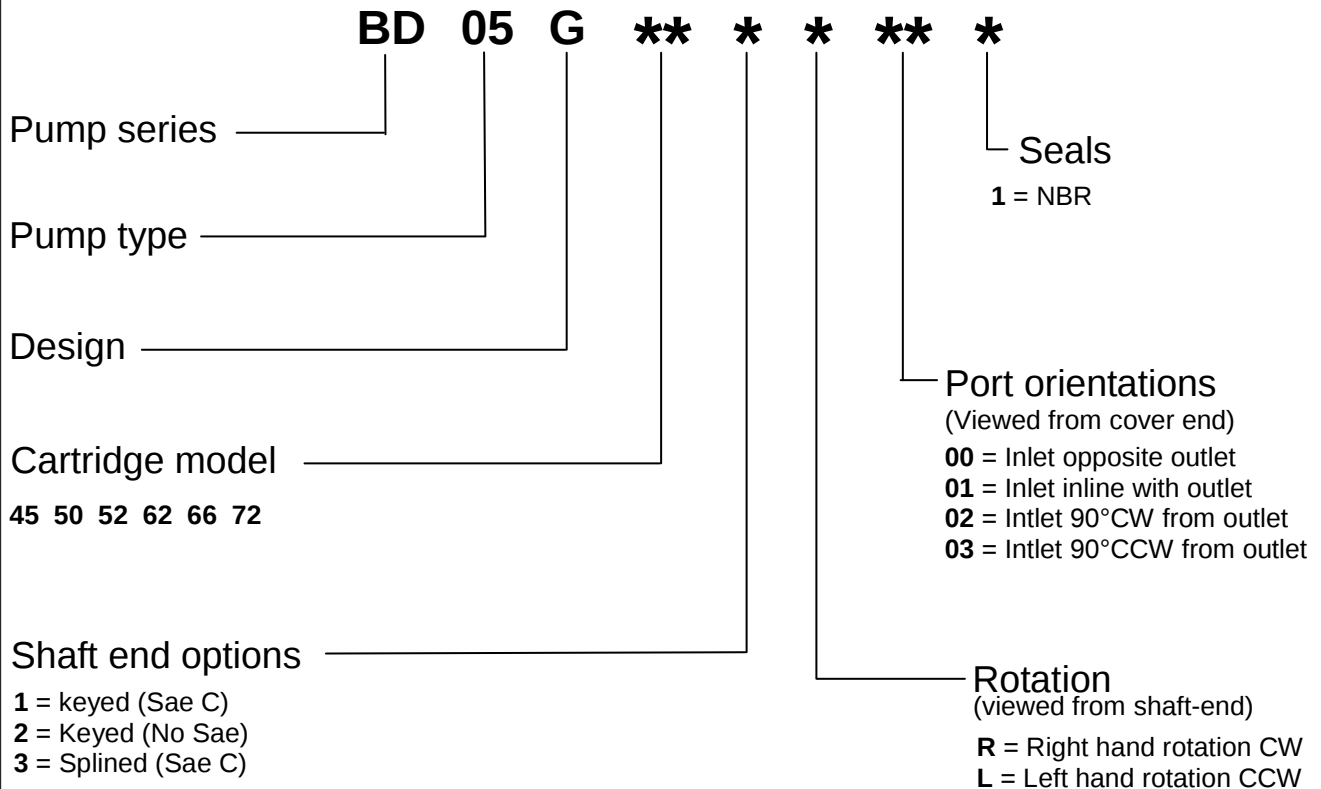

Port orientations

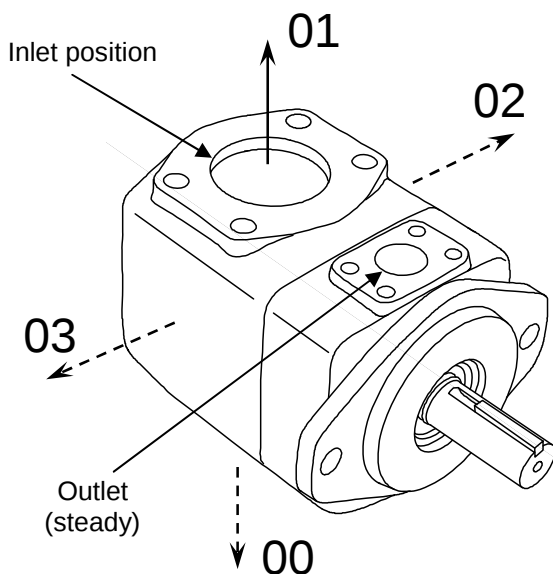

Pump rotation

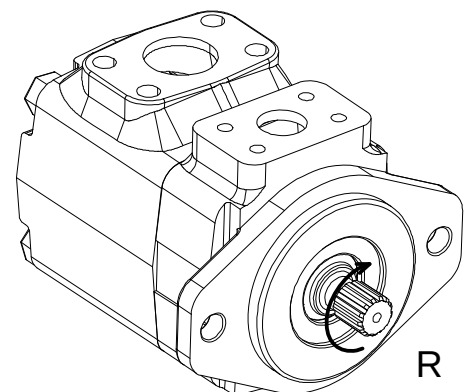

# Id. codes of pump components


| Screw                          |          |
|--------------------------------|----------|
| Part No.                       | M3050070 |
| Torque at 187 Nm (1668 lb.in.) |          |


| Type | Cartridge  |               |
|------|------------|---------------|
|      | Model      | Pump rotation |
|      | Right hand | Left hand     |
| BD05 | 45         | N0300030      |
|      | 50         | N0300050      |
|      | 52         | N0300070      |
|      | 62         | N0300130      |
|      | 66         | N0300150      |
|      | 72         | N0300170      |
|      |            | N0300180      |

| Shaft |          |
|-------|----------|
| Model | Part No. |
| 01    | K6041000 |
| 02    | K6042000 |
| 03    | K6043000 |

| Shaft seal |      |
|------------|------|
| Part No.   | type |
| M3050060   | NBR  |

| Pump seal kit |      |
|---------------|------|
| Part No.      | Type |
| M3050500      | NBR  |

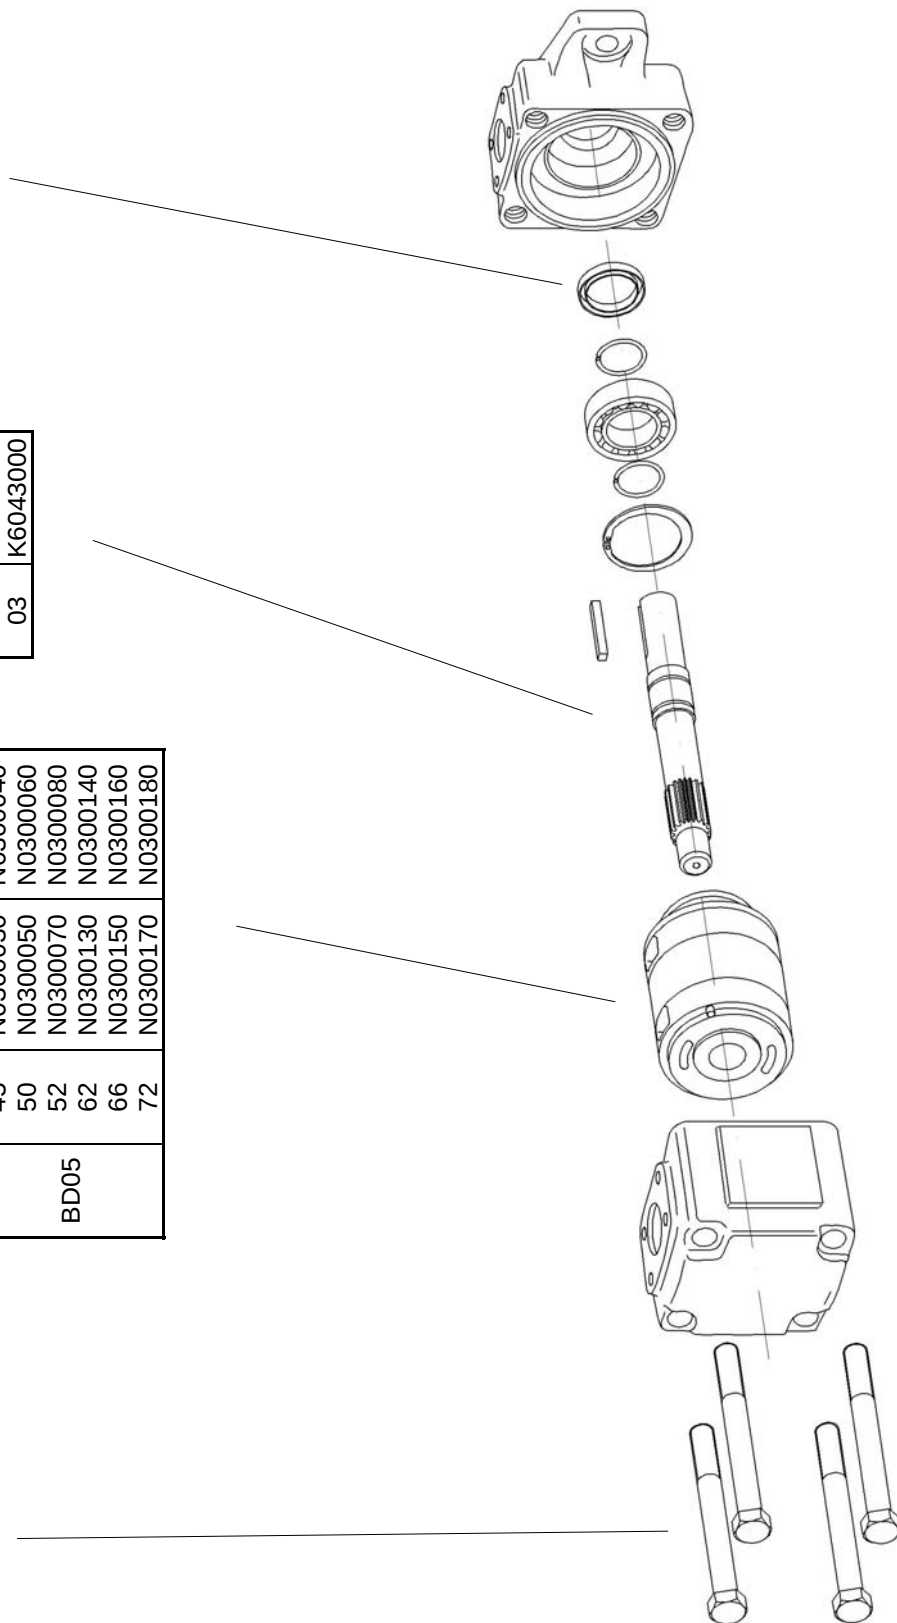

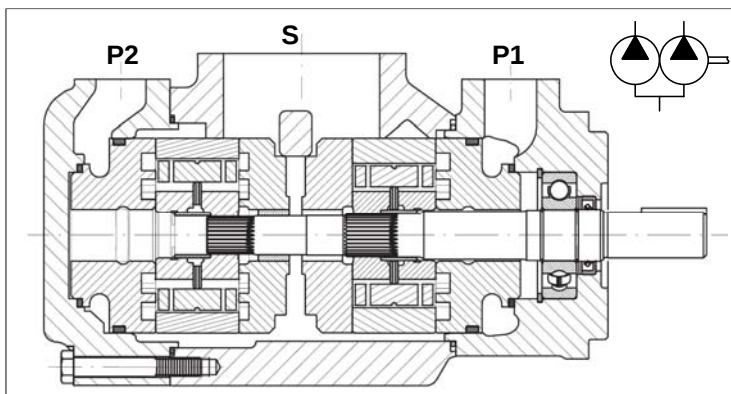

## General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in several versions with rated capacity from 32 to 300 l/min (from 8 to 80 gpm) at 1500 rpm and pressure 0 bar.

## Technical characteristics (P1 and P2 sections)

| Cartridge model | Geometric displacement |                      | Rated capacity at 0 bar |         |          |         | Maximum pressure |        |           |        | Speed range |
|-----------------|------------------------|----------------------|-------------------------|---------|----------|---------|------------------|--------|-----------|--------|-------------|
|                 |                        |                      | 1200 rpm                |         | 1500 rpm |         | intermittent     |        | continuos |        |             |
|                 | ml/rev.                | (in <sup>3</sup> /r) | l/min                   | (gpm)   | l/min    | (gpm)   | bar              | (psi)  | bar       | (psi)  |             |
| 03              | 10,8                   | (0.66)               | 12,93                   | (3.42)  | 16,2     | (4.29)  | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 05              | 17,2                   | (1.05)               | 20,60                   | (5.45)  | 25,8     | (6.83)  | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 06              | 21,3                   | (1.30)               | 25,52                   | (6.75)  | 31,9     | (8.44)  | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 08              | 26,4                   | (1.61)               | 31,64                   | (8.37)  | 39,6     | (10.48) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 10              | 34,1                   | (2.08)               | 40,86                   | (10.81) | 51,1     | (13.52) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 12              | 37,1                   | (2.26)               | 44,45                   | (11.76) | 55,6     | (14.71) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 14              | 46,0                   | (2.81)               | 55,11                   | (14.58) | 69,0     | (18.25) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 17              | 58,3                   | (3.56)               | 69,85                   | (18.48) | 87,4     | (23.12) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 20              | 63,8                   | (3.89)               | 76,47                   | (20.23) | 95,7     | (25.32) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 22              | 70,3                   | (4.29)               | 84,26                   | (22.29) | 105,4    | (27.88) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
| 25              | 79,3                   | (4.84)               | 95,03                   | (25.14) | 118,9    | (31.46) | 275              | (4000) | 240       | (3500) | 400 - 2500  |
| 28              | 88,8                   | (5.42)               | 106,41                  | (28.15) | 133,2    | (35.24) | 210              | (3000) | 160       | (2300) | 400 - 2500  |
| 31              | 100,0                  | (6.10)               | 119,83                  | (31.70) | 150,0    | (39.68) | 210              | (3000) | 160       | (2300) | 400 - 2500  |

**Hydraulic fluids:** antiwear petroleum base, synthetic fluid, water glycols and invert emulsions.

**Viscosity range / Viscosity index:** with antiwear petroleum base, from 10 to 2000 cSt. (10 to 108 cSt. recommended). Other fluids from 18 to 2000 c.St. (18 to 108 c.St. recomm.). Choose 30 c.St. for max life-time. *Viscosity index:* 90° min.

**Filtration:** to maintain contamination level to ISO 18/14 or NAS 1638 class 8.

Filters: for the inlet, use strainer with mesh not less than 149 micron abs. (omit strainer with application requiring cold start or when using fire resistant fluids); for the return line - 25 micron abs. or better.

**Water contamination level:** max 0.10% for mineral oil. With other fluids, max 0.05%


**Intermittent pressure:** typically the working time permitted at such pressure is < 30% of the duty cycle. With duty cycles longer than 15 minutes, please contact the technical office of B&C.

**Minimum inlet pressure:** (with mineral oil 10-65 c.St.): 0,8 bar abs. (3 psi abs.). In the biggest displacements of each series and with the highest speeds, is required an higher inlet pressure. Please consult the specific section for details. In case of tandem pump, supply the inlet port with the highest pressure requested among the pump stages.

**Operating temperature:** with "antiwear petroleum base" the permitted temperature is: from -18 to +100° C; with water glycol and "water in oil emulsion": from +10 to +50°C; with syntetic fluid: from -18 to +70°C; with rapeseed and esters: from -20 to + 70°C. During cold start the pumps should be operated at low speed and pressure until fluid warms up to an acceptable viscosity for full power operation.

**Drive:** direct and coaxial by means of a flexible coupling. Low axial and radial loads allowed. Consult specific section for more detail.

## Main operating data

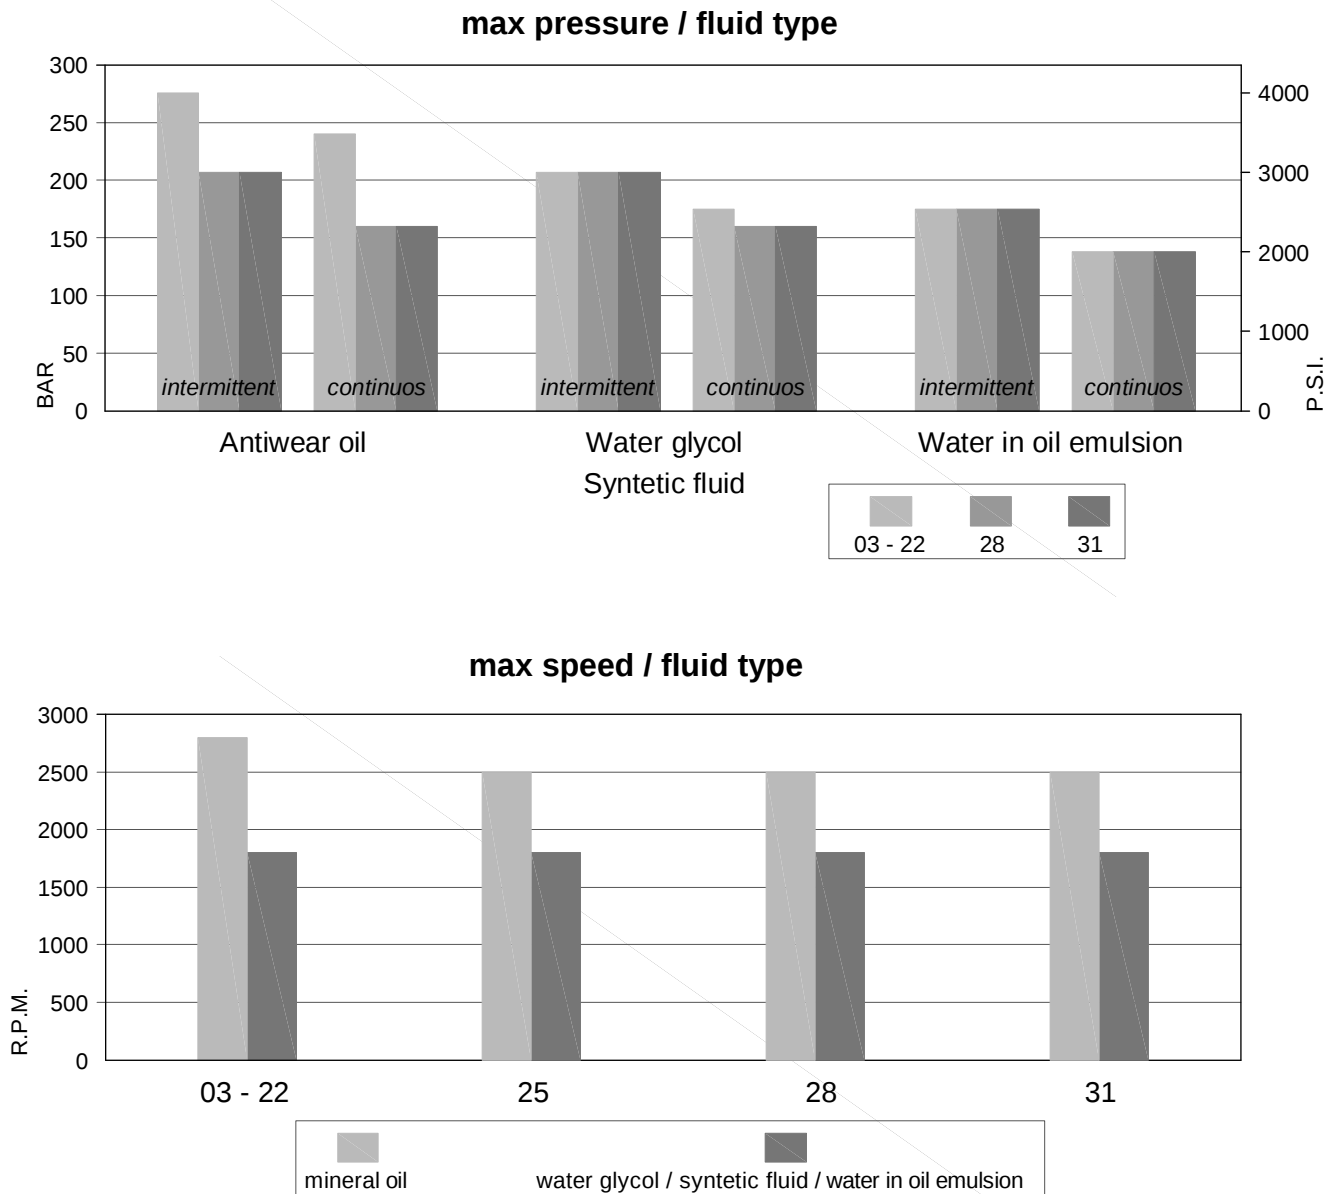





## min. allowable inlet pressure / rotation speed (abs. bar)\*

| Speed<br>r.p.m. | from 03<br>to 10 | 12   | 14   | 17   | 20   | 22   | 25   | 28   | 31   |
|-----------------|------------------|------|------|------|------|------|------|------|------|
| 2800            | 1.00             | 1.00 | 1.00 | 1.03 | 1.03 | 1.05 |      |      |      |
| 2500            | 0.90             | 0.92 | 0.95 | 0.95 | 0.95 | 0.98 | 1.05 | 1.08 | 1.11 |
| 2300            | 0.80             | 0.85 | 0.85 | 0.90 | 0.90 | 0.90 | 0.95 | 0.98 | 1.0  |
| 2200            | 0.80             | 0.80 | 0.80 | 0.85 | 0.85 | 0.90 | 0.95 | 0.98 | 0.90 |
| 2100            | 0.80             | 0.80 | 0.80 | 0.80 | 0.80 | 0.85 | 0.90 | 0.90 | 0.85 |
| 1800            | 0.80             | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| 1500            | 0.80             | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| 1200            | 0.80             | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |

\* measured inside the inlet flange; with petroleum base fluid (visc. 10 to 65 cSt.).

Multiply the abs. pressure by 1.25 when using water-glycol or "water in oil emulsion", by 1.35 with synthetic fluids, and by 1.1 with ester or rapeseed base.

## Main operating data

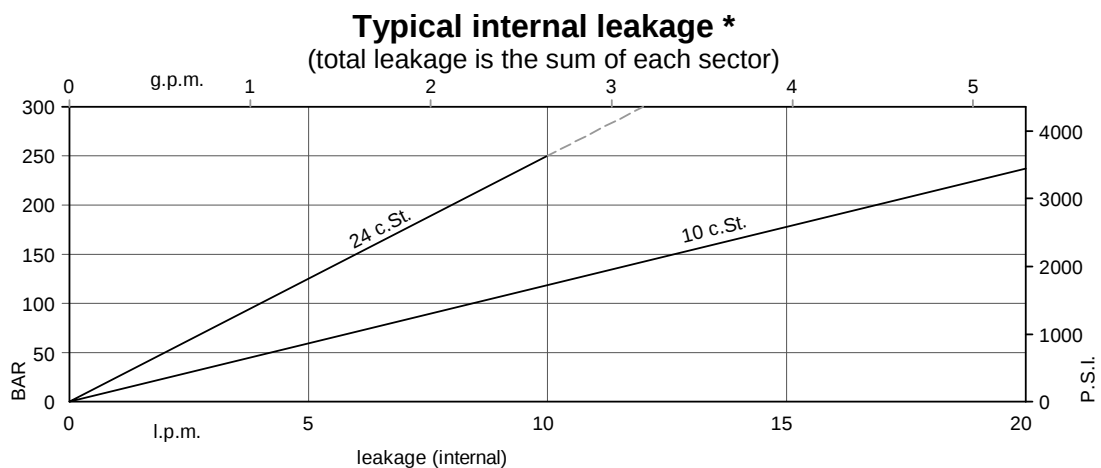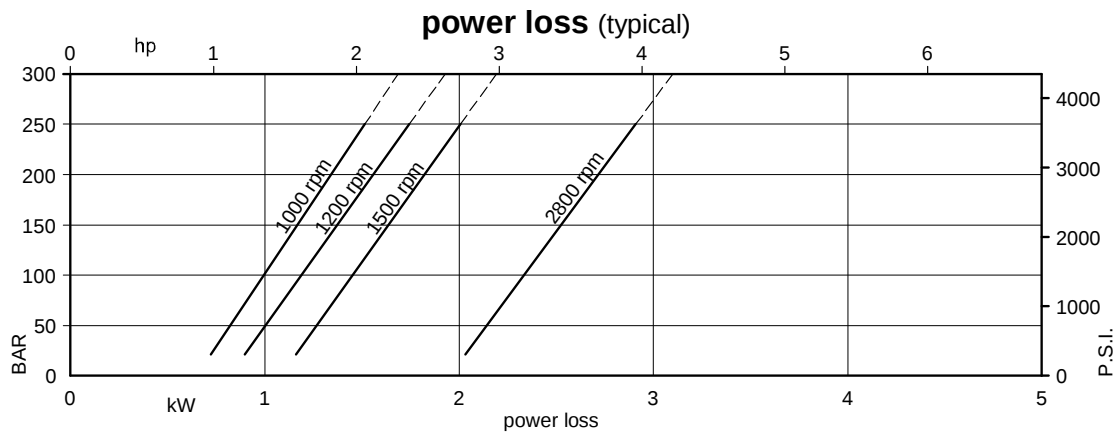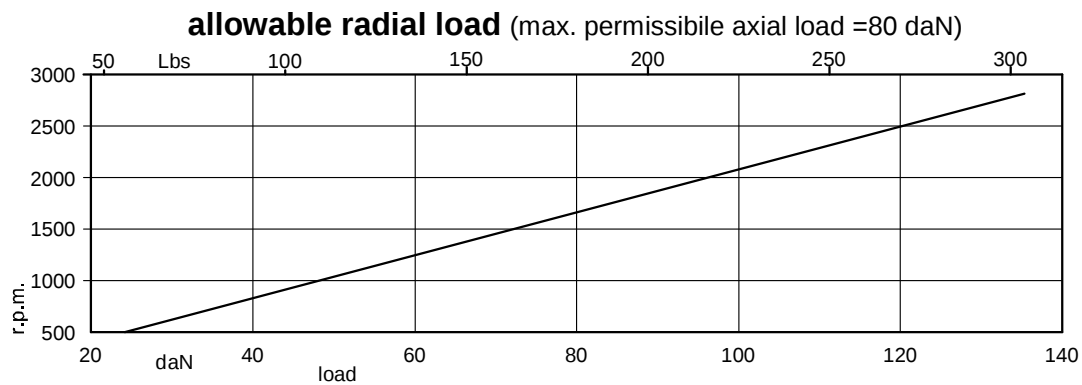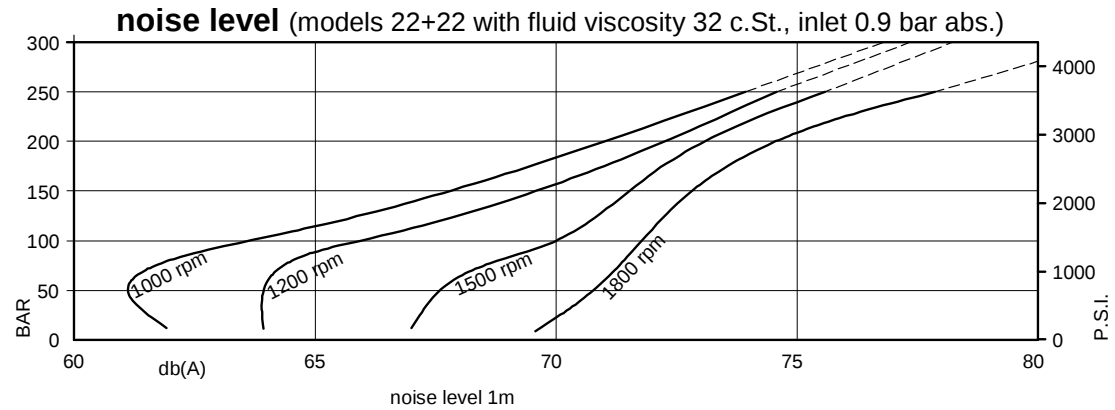

\* If the internal leakage is more than 50% of the theoretical flow, do not operate the pump

## Main operating data (P1 and P2 sections)

Typical: 24 c.St. (115 SUS)

| Cartridge model        | Geometric displacement |                      | Speed rpm | 140 bar |         | 240 bar              |                       | Input power (kW) |                    |                     |
|------------------------|------------------------|----------------------|-----------|---------|---------|----------------------|-----------------------|------------------|--------------------|---------------------|
|                        | ml/rev.                | (in <sup>3</sup> /r) |           | l/min   | (gpm)   | l/min                | (gpm)                 | 7 bar (100 psi)  | 140 bar (2000 psi) | 240 bar (3500 psi)  |
| <b>03</b>              | 10,8                   | (0.66)               | 1000      | -       | -       | -                    | -                     | 1.00             | -                  | -                   |
|                        |                        |                      | 1200      | -       | -       | -                    | -                     | 1.05             | -                  | -                   |
|                        |                        |                      | 1500      | 10,7    | (2.84)  | -                    | -                     | 1.30             | 5.30               | -                   |
|                        |                        |                      | 1800      | 13,6    | (3.61)  | -                    | -                     | 1.55             | 8.45               | -                   |
| <b>05</b>              | 17,2                   | (1.05)               | 1000      | 11,7    | (3.09)  | -                    | -                     | 1.10             | 5.10               | -                   |
|                        |                        |                      | 1200      | 15,1    | (3.99)  | -                    | -                     | 1.14             | 8.17               | -                   |
|                        |                        |                      | 1500      | 20,3    | (5.37)  | 15,8                 | (4.18)                | 1.40             | 7.50               | 12.2                |
|                        |                        |                      | 1800      | 25,1    | (6.65)  | 21,0                 | (5.56)                | 1.68             | 12.0               | 14.4                |
| <b>06</b>              | 21,3                   | (1.30)               | 1000      | 15,80   | (4.18)  | 11,30                | (2.99)                | 1.10             | 6.00               | 10.00               |
|                        |                        |                      | 1200      | 19,73   | (5.22)  | 15,61                | (4.13)                | 1.19             | 7.13               | 11.86               |
|                        |                        |                      | 1500      | 26,50   | (7.01)  | 22,00                | (5.82)                | 1.50             | 8.90               | 14.70               |
|                        |                        |                      | 1800      | 32,51   | (8.60)  | 28,39                | (7.51)                | 1.76             | 10.50              | 17.33               |
| <b>08</b>              | 26,4                   | (1.61)               | 1000      | 20,90   | (5.53)  | 16,40                | (4.34)                | 1.20             | 7.20               | 12.10               |
|                        |                        |                      | 1200      | 25,86   | (6.84)  | 21,74                | (5.75)                | 1.26             | 8.51               | 14.29               |
|                        |                        |                      | 1500      | 34,10   | (9.02)  | 29,60                | (7.83)                | 1.60             | 10.70              | 17.70               |
|                        |                        |                      | 1800      | 41,66   | (11.02) | 37,54                | (9.93)                | 1.87             | 12.58              | 20.98               |
| <b>10</b>              | 34,1                   | (2.08)               | 1000      | 28,60   | (7.57)  | 24,10                | (6.38)                | 1.30             | 8.90               | 15.10               |
|                        |                        |                      | 1200      | 35,08   | (9.28)  | 30,96                | (8.19)                | 1.37             | 10.61              | 17.96               |
|                        |                        |                      | 1500      | 45,70   | (12.09) | 41,20                | (10.90)               | 1.70             | 13.40              | 22.30               |
|                        |                        |                      | 1800      | 55,53   | (14.69) | 51,41                | (13.60)               | 2.03             | 15.72              | 26.47               |
| <b>12</b>              | 37,1                   | (2.26)               | 1000      | 31,60   | (8.36)  | 27,10                | (7.17)                | 1.30             | 9.60               | 16.30               |
|                        |                        |                      | 1200      | 38,67   | (10.23) | 34,55                | (9.14)                | 1.41             | 11.42              | 19.38               |
|                        |                        |                      | 1500      | 50,20   | (13.28) | 45,70                | (12.09)               | 1.70             | 14.40              | 24.10               |
|                        |                        |                      | 1800      | 60,90   | (16.11) | 56,78                | (15.02)               | 2.09             | 16.95              | 28.62               |
| <b>14</b>              | 46,0                   | (2.81)               | 1000      | 40,50   | (10.71) | 36,00                | (9.52)                | 1.40             | 11.70              | 19.90               |
|                        |                        |                      | 1200      | 49,33   | (13.05) | 45,21                | (11.96)               | 1.53             | 13.85              | 23.62               |
|                        |                        |                      | 1500      | 63,50   | (16.80) | 59,00                | (15.61)               | 1.90             | 17.60              | 29.50               |
|                        |                        |                      | 1800      | 76,92   | (20.35) | 72,80                | (19.26)               | 2.27             | 20.58              | 34.97               |
| <b>17</b>              | 58,3                   | (3.56)               | 1000      | 52,80   | (13.97) | 48,30                | (12.78)               | 1.60             | 14.50              | 24.80               |
|                        |                        |                      | 1200      | 64,07   | (16.95) | 59,95                | (15.86)               | 1.70             | 17.19              | 29.47               |
|                        |                        |                      | 1500      | 82,00   | (21.69) | 77,50                | (20.50)               | 2.10             | 21.90              | 36.90               |
|                        |                        |                      | 1800      | 99,04   | (26.20) | 94,92                | (25.11)               | 2.52             | 25.60              | 43.76               |
| <b>20</b>              | 63,8                   | (3.89)               | 1000      | 58,30   | (15.42) | 53,80                | (14.23)               | 1.60             | 15.80              | 27.00               |
|                        |                        |                      | 1200      | 70,69   | (18.70) | 66,57                | (17.61)               | 1.77             | 18.68              | 32.09               |
|                        |                        |                      | 1500      | 90,20   | (23.86) | 85,70                | (22.67)               | 2.20             | 23.80              | 40.20               |
|                        |                        |                      | 1800      | 108,90  | (28.81) | 103,65               | (27.42)               | 2.63             | 27.84              | 47.68               |
| <b>22</b>              | 70,3                   | (4.29)               | 1000      | 64,80   | (17.14) | 60,30                | (15.95)               | 1.70             | 17.30              | 29.60               |
|                        |                        |                      | 1200      | 78,47   | (20.76) | 74,35                | (19.67)               | 1.86             | 20.46              | 35.18               |
|                        |                        |                      | 1500      | 100,00  | (26.46) | 95,50                | (25.26)               | 2.30             | 26.10              | 44.10               |
|                        |                        |                      | 1800      | 120,58  | (31.90) | 116,46               | (30.81)               | 2.76             | 30.49              | 52.32               |
| <b>25<sup>1)</sup></b> | 79,3                   | (4.84)               | 1000      | 73,80   | (19.52) | 69,30                | (18.33)               | 1.80             | 19.30              | 33.20               |
|                        |                        |                      | 1200      | 89,25   | (23.61) | 85,13                | (22.52)               | 1.99             | 22.90              | 39.47               |
|                        |                        |                      | 1500      | 113,50  | (30.03) | 109,00               | (28.84)               | 2.50             | 29.20              | 49.50               |
|                        |                        |                      | 1800      | 136,76  | (36.18) | 132,64               | (35.09)               | 2.95             | 34.16              | 58.75               |
| <b>28<sup>1)</sup></b> | 88,8                   | (5.42)               | 1000      | 83,30   | (22.04) | 80,10 <sup>2)</sup>  | (21.19) <sup>2)</sup> | 1.90             | 21.90              | 32.50 <sup>2)</sup> |
|                        |                        |                      | 1200      | 100,62  | (26.62) | 97,75 <sup>2)</sup>  | (25.86) <sup>2)</sup> | 2.11             | 25.49              | 37.77 <sup>2)</sup> |
|                        |                        |                      | 1500      | 127,70  | (33.78) | 124,50 <sup>2)</sup> | (32.94) <sup>2)</sup> | 2.80             | 32.70              | 48.50 <sup>2)</sup> |
|                        |                        |                      | 1800      | 153,85  | (40.70) | 150,97 <sup>2)</sup> | (39.94) <sup>2)</sup> | 3.14             | 38.04              | 56.42 <sup>2)</sup> |
| <b>31<sup>1)</sup></b> | 100,0                  | (6.10)               | 1000      | 94,50   | (25.00) | 91,30 <sup>2)</sup>  | (24.15) <sup>2)</sup> | 2.00             | 24.40              | 36.40 <sup>2)</sup> |
|                        |                        |                      | 1200      | 114,04  | (30.17) | 111,17 <sup>2)</sup> | (29.41) <sup>2)</sup> | 2.26             | 28.53              | 42.34 <sup>2)</sup> |
|                        |                        |                      | 1500      | 144,50  | (38.23) | 141,30 <sup>2)</sup> | (37.38) <sup>2)</sup> | 2.80             | 36.50              | 54.40 <sup>2)</sup> |
|                        |                        |                      | 1800      | 173,99  | (46.03) | 171,12 <sup>2)</sup> | (45.27) <sup>2)</sup> | 3.37             | 42.61              | 63.28 <sup>2)</sup> |



- Internal leakage exceeding 50% of the theoretical flow

1) 2500 r.p.m. max.

2) 210 bar (3000p.s.i.) max. int.

## Installation dimensions


mm (inches)

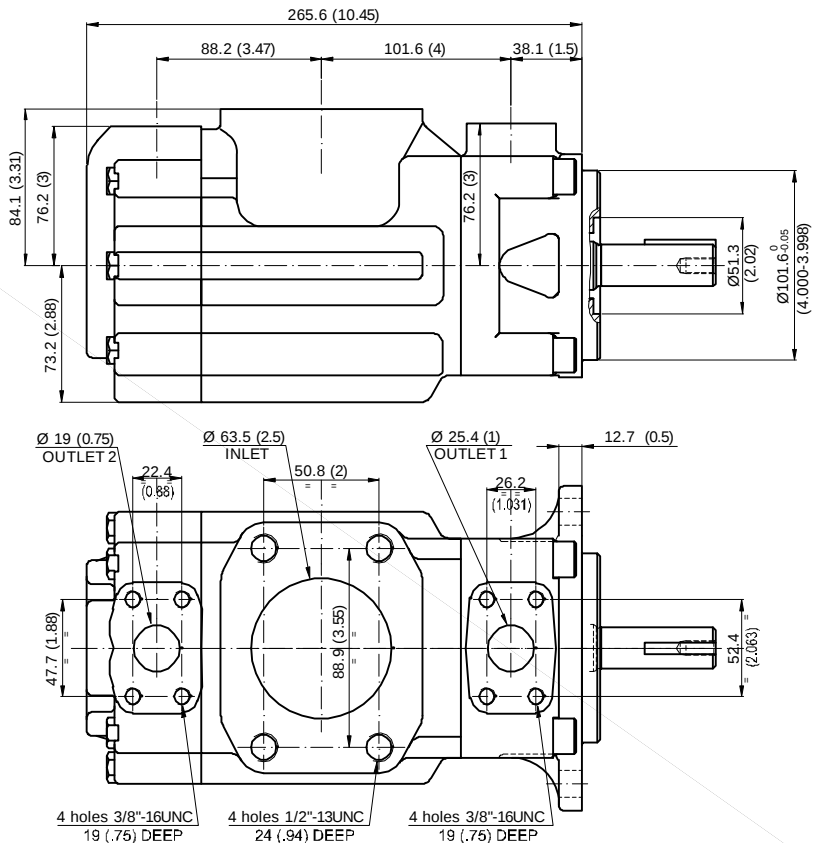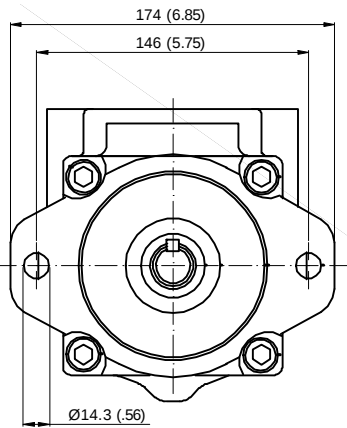


Approx weight: 26 kg (57 lbs)

## Shaft options


mm (inches)

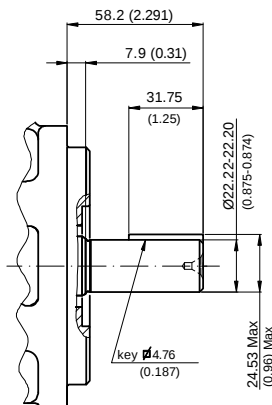

Shaft No.1

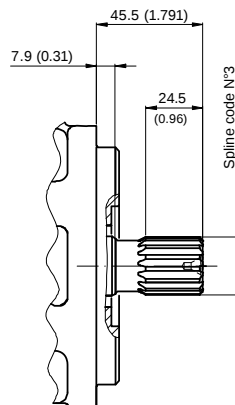

Shaft No.3

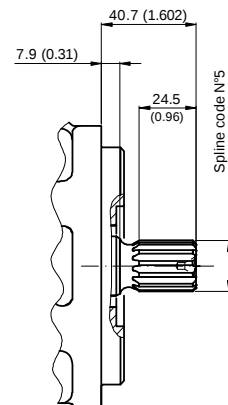

Shaft No.5

**Calculation of the max permitted torque:**  
(avoid to exceed)

| Shaft No. | (ml/rev) x bar<br>P1+P2 | (in3/rev) x psi<br>P1+P2 |
|-----------|-------------------------|--------------------------|
| 1         | 14300                   | 12666                    |
| 3         | 32670                   | 28937                    |
| 5         | 20600                   | 18246                    |



**Spline code**

**3**



**5**

| Designation    | Sae B-B            | Sae B              |
|----------------|--------------------|--------------------|
| Pressure angle | 30°                | 30°                |
| No. of teeth   | 15                 | 13                 |
| Pitch          | 16/32 d.p.         | 16/32 d.p.         |
| Spline type    | flat root side fit | flat root side fit |
| Class          | 1- J498 b          | 1- J498 b          |

## Model code breakdown

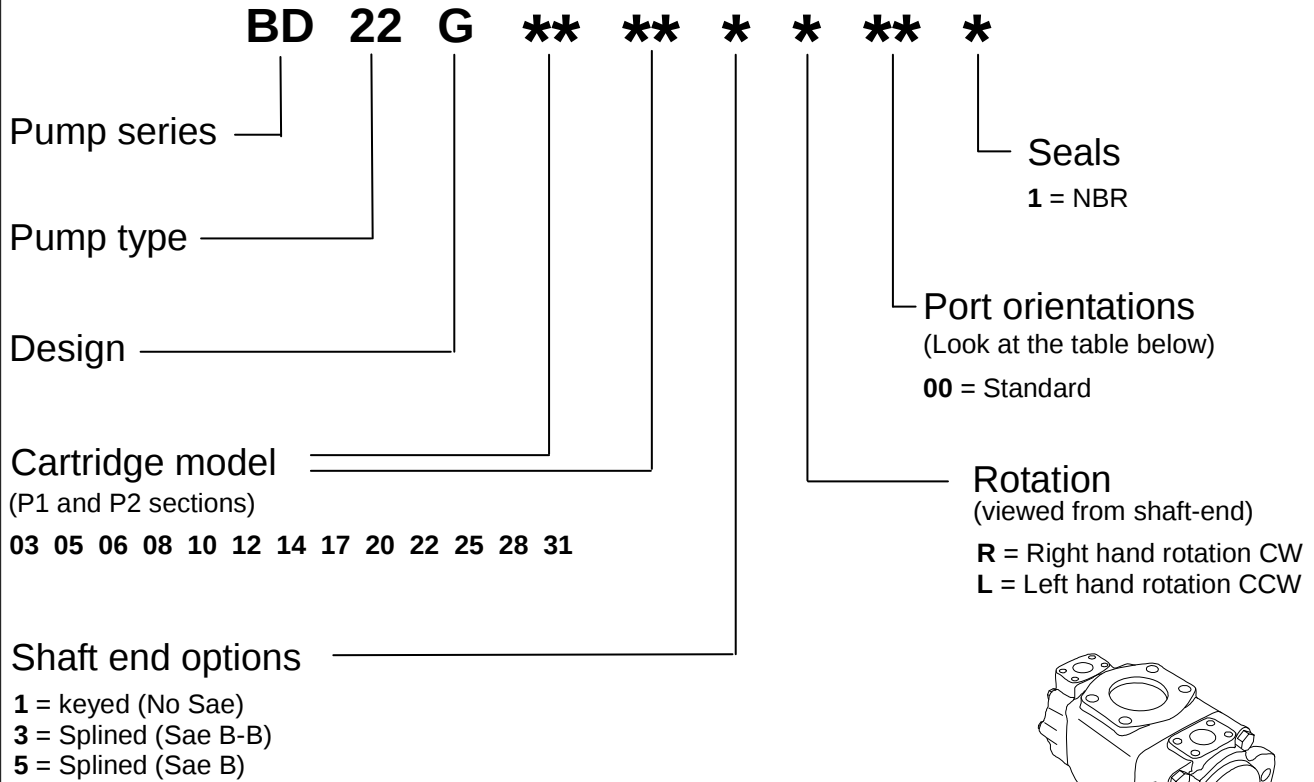

Port orientations

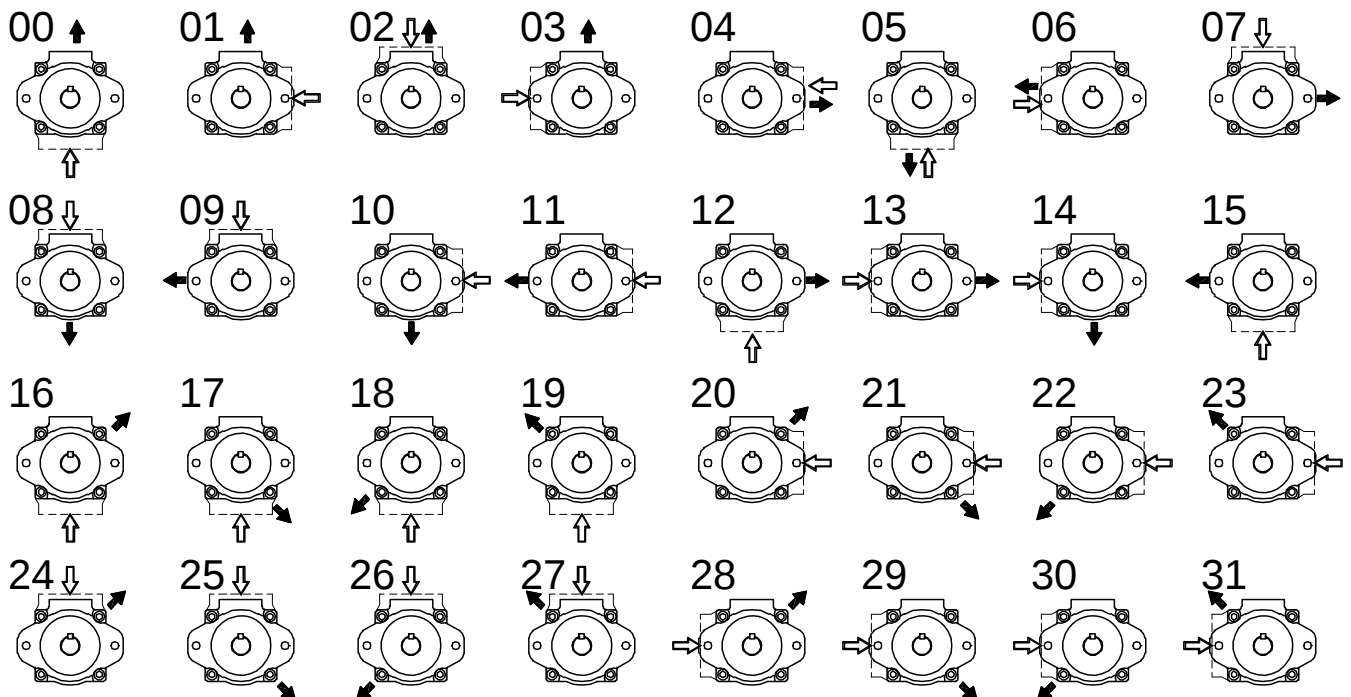

## Id. codes of pump components

| Rear cartridge |       |               |           |
|----------------|-------|---------------|-----------|
| Type           | Model | Pump rotation |           |
|                |       | Right hand    | Left hand |
| BD22           | 03    | N0400270      | N0400280  |
|                | 05    | N0400290      | N0400300  |
|                | 06    | N0400310      | N0400320  |
|                | 08    | N0400330      | N0400340  |
|                | 10    | N0400350      | N0400360  |
|                | 12    | N0400370      | N0400380  |
|                | 14    | N0400390      | N0400400  |
|                | 17    | N0400410      | N0400420  |
|                | 20    | N0400430      | N0400440  |
|                | 22    | N0400450      | N0400460  |
|                | 25    | N0400470      | N0400480  |
|                | 28    | N0400490      | N0400500  |
|                | 31    | N0400510      | N0400520  |

| Front cartridge |       |               |           |
|-----------------|-------|---------------|-----------|
| Type            | Model | Pump rotation |           |
|                 |       | Right hand    | Left hand |
| BD22            | 03    | N0400010      | N0400020  |
|                 | 05    | N0400030      | N0400040  |
|                 | 06    | N0400050      | N0400060  |
|                 | 08    | N0400070      | N0400080  |
|                 | 10    | N0400090      | N0400100  |
|                 | 12    | N0400110      | N0400120  |
|                 | 14    | N0400130      | N0400140  |
|                 | 17    | N0400150      | N0400160  |
|                 | 20    | N0400170      | N0400180  |
|                 | 22    | N0400190      | N0400200  |
|                 | 25    | N0400210      | N0400220  |
|                 | 28    | N0400230      | N0400240  |
|                 | 31    | N0400250      | N0400260  |


| Shaft |          |
|-------|----------|
| Model | Part No. |
| 01    | K6211000 |
| 03    | K6213000 |
| 05    | K6215000 |


| Shaft seal |      |
|------------|------|
| Part No.   | type |
| M3020060   | NBR  |

| Screw                          |          |
|--------------------------------|----------|
| Part No.                       | M3020140 |
| Torque at 159 Nm (1418 lb.in.) |          |

| Screw                        |          |
|------------------------------|----------|
| Part No.                     | M3020130 |
| Torque at 61 Nm (544 lb.in.) |          |

| Pump seal kit |      |
|---------------|------|
| Part No.      | Type |
| M3022500      | NBR  |

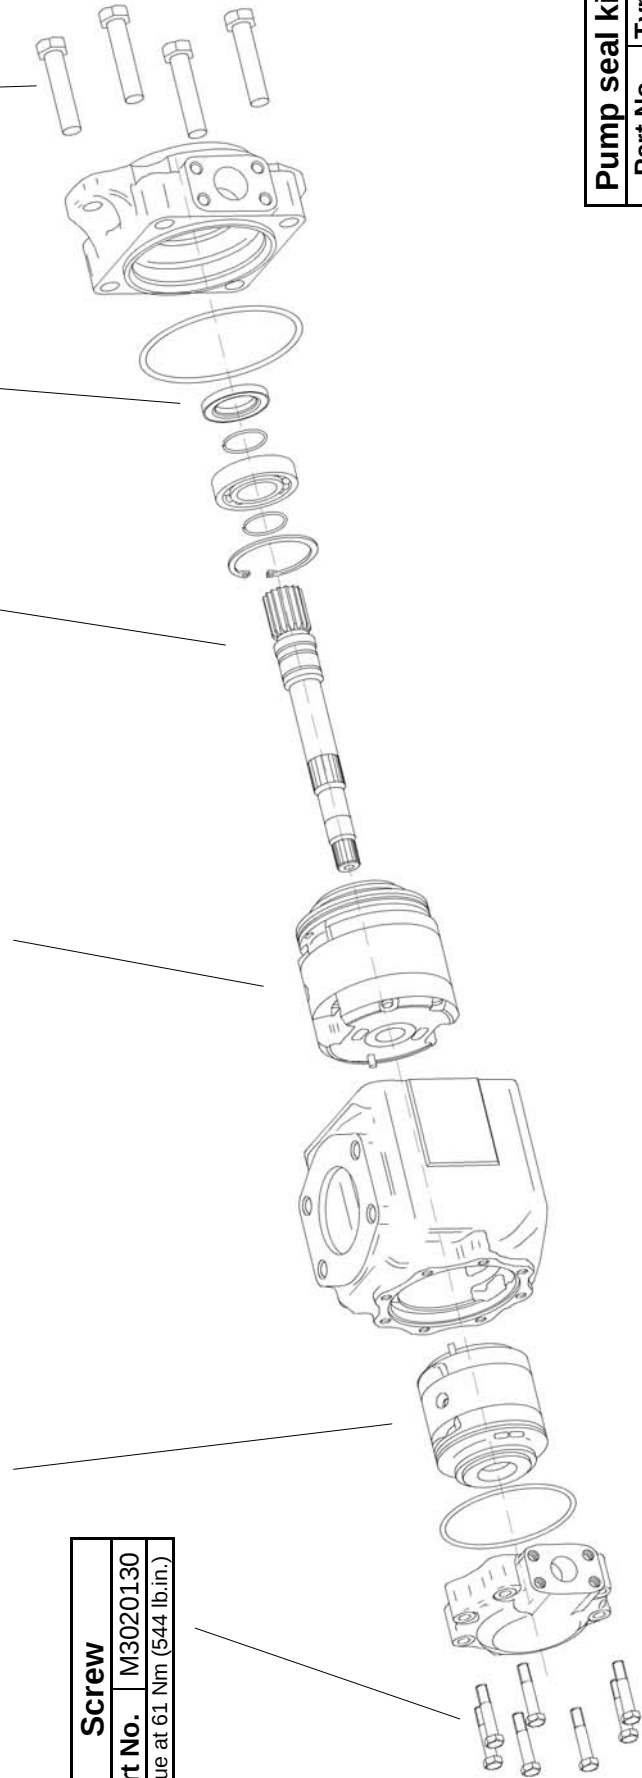

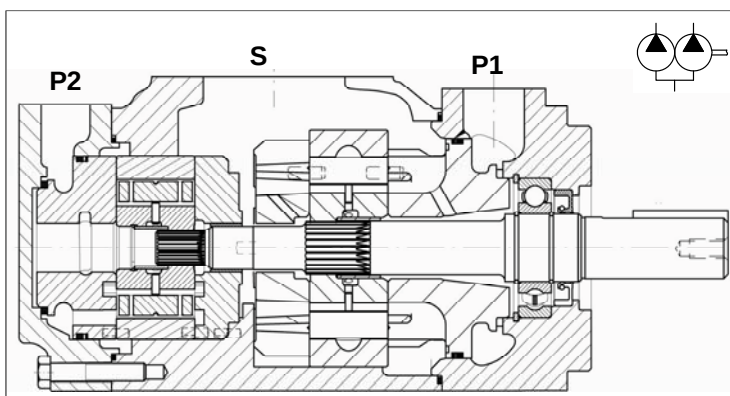

## General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in several versions with rated capacity from 87 to 300 l/min (from 8 to 80 gpm) at 1500 rpm and pressure 0 bar.

## Technical characteristics

| Cartridge model |    | Geometric displacement |                      | Rated capacity at 0 bar |         |          |         | Maximum pressure |        |           |        | Speed range |
|-----------------|----|------------------------|----------------------|-------------------------|---------|----------|---------|------------------|--------|-----------|--------|-------------|
|                 |    |                        |                      | 1200 rpm                |         | 1500 rpm |         | intermittent     |        | continuos |        |             |
|                 |    | ml/rev.                | (in <sup>3</sup> /r) | l/min                   | (gpm)   | l/min    | (gpm)   | bar              | (psi)  | bar       | (psi)  |             |
| P1              | 14 | 47,6                   | (2.90)               | 57,04                   | (15.09) | 71,4     | (18.89) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
|                 | 20 | 66,0                   | (4.03)               | 79,08                   | (20.92) | 99,0     | (26.19) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
|                 | 24 | 79,5                   | (4.85)               | 95,26                   | (25.20) | 119,3    | (31.56) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
|                 | 28 | 89,7                   | (5.47)               | 107,50                  | (28.44) | 134,5    | (35.58) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
|                 | 31 | 98,3                   | (6.00)               | 117,82                  | (31.17) | 147,4    | (38.99) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
|                 | 35 | 111,0                  | (6.77)               | 133,02                  | (35.19) | 166,5    | (44.05) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
|                 | 38 | 120,3                  | (7.34)               | 144,17                  | (38.14) | 180,4    | (47.72) | 240              | (3500) | 210       | (3000) | 400 - 2500  |
|                 | 42 | 136,0                  | (8.30)               | 162,99                  | (43.12) | 204,0    | (53.97) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
|                 | 45 | 145,7                  | (8.89)               | 174,60                  | (46.19) | 218,5    | (57.80) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
|                 | 50 | 158,0                  | (9.64)               | 189,34                  | (50.09) | 237,0    | (62.70) | 210              | (3000) | 160       | (2300) | 400 - 2200  |
| P2              | 03 | 10,8                   | (0.66)               | 12,93                   | (3.42)  | 16,2     | (4.29)  | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 05 | 17,2                   | (1.05)               | 20,60                   | (5.45)  | 25,8     | (6.83)  | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 06 | 21,3                   | (1.30)               | 25,52                   | (6.75)  | 31,9     | (8.44)  | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 08 | 26,4                   | (1.61)               | 31,64                   | (8.37)  | 39,6     | (10.48) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 10 | 34,1                   | (2.08)               | 40,86                   | (10.81) | 51,1     | (13.52) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 12 | 37,1                   | (2.26)               | 44,45                   | (11.76) | 55,6     | (14.71) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 14 | 46,0                   | (2.81)               | 55,11                   | (14.58) | 69,0     | (18.25) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 17 | 58,3                   | (3.56)               | 69,85                   | (18.48) | 87,4     | (23.12) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 20 | 63,8                   | (3.89)               | 76,47                   | (20.23) | 95,7     | (25.32) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 22 | 70,3                   | (4.29)               | 84,26                   | (22.29) | 105,4    | (27.88) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 25 | 79,3                   | (4.84)               | 95,03                   | (25.14) | 118,9    | (31.46) | 275              | (4000) | 240       | (3500) | 400 - 2500  |
|                 | 28 | 88,8                   | (5.42)               | 106,41                  | (28.15) | 133,2    | (35.24) | 210              | (3000) | 160       | (2300) | 400 - 2500  |
|                 | 31 | 100,0                  | (6.10)               | 119,83                  | (31.70) | 150,0    | (39.68) | 210              | (3000) | 160       | (2300) | 400 - 2500  |

**Hydraulic fluids:** antiwear petroleum base, synthetic fluid, water glycols and invert emulsions.

**Viscosity range / Viscosity index:** with antiwear petroleum base, from 10 to 2000 cSt. (10 to 108 cSt. recommended). Other fluids from 18 to 2000 cSt. (18 to 108 cSt. recomm.). Choose 30 cSt. for max lifetime. *Viscosity index:* 90° min.

**Filtration:** to maintain contamination level to ISO 18/14 or NAS 1638 class 8.

Filters: for the inlet, use strainer with mesh not less than 149 micron abs. (omit strainer with application requiring cold start or when using fire resistant fluids); for the return line - 25 micron abs. or better.

**Water contamination level:** max 0.10% for mineral oil. With other fluids, max 0.05%

**Intermittent pressure:** typically the working time permitted at such pressure is < 30% of the duty cycle. With duty cycles longer than 15 minutes, please contact the technical office of B&C.


**Minimum inlet pressure:** (with mineral oil 10-65 cSt.): 0,8 bar abs. (3 psi abs.). In the biggest displacements of each series and with the highest speeds, is required an higher inlet pressure. Please consult the specific section for details. In case of tandem pump, supply the inlet port with the highest pressure requested among the pump stages.

**Operating temperature:** with "antiwear petroleum base" the permitted temperature is: from -18 to +100°C; with water glycol and "water in oil emulsion": from +10 to +50°C; with syntetic fluid: from -18 to +70°C; with rapeseed and esters: from -20 to + 70°C. During cold start the pumps should be operated at low speed and pressure until fluid warms up to an acceptable viscosity for full power operation.


**Drive:** direct and coaxial by means of a flexible coupling. Low axial and radial loads allowed. Consult specific section for more detail.

## Main operating data

### max pressure / fluid type

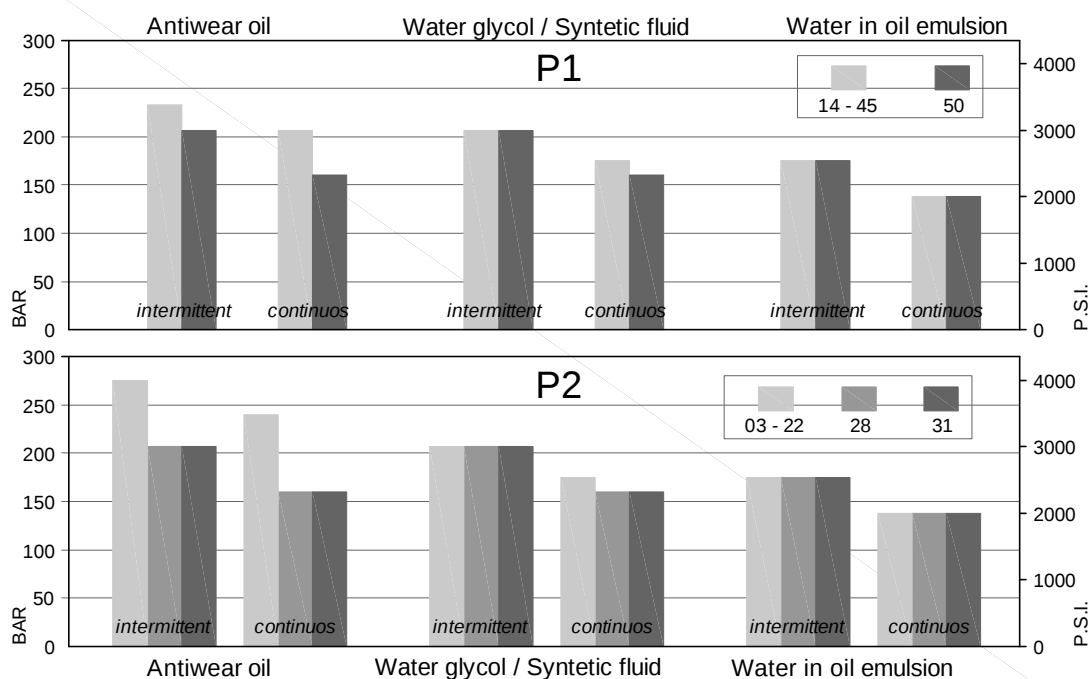

### max speed / fluid type

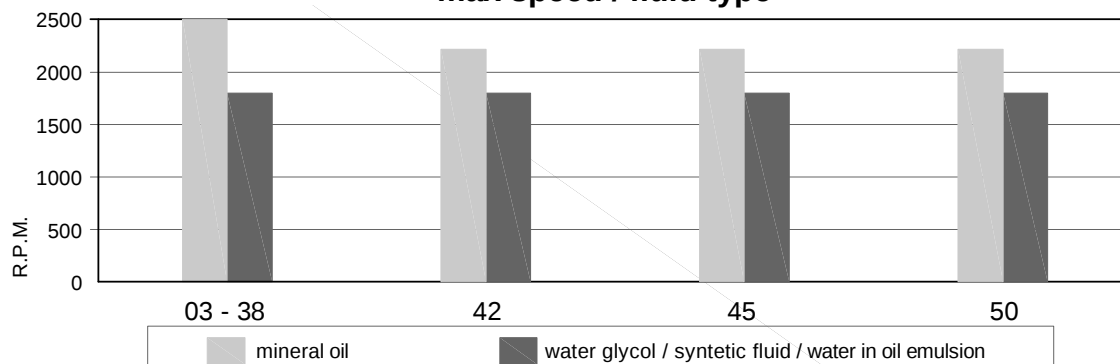


### min. allowable inlet pressure / rotation speed (abs. bar)\*

| P1 | Speed r.p.m. | from 14 to 20 | 24   | 28   | 31   | 35   | 38   | 42   | 45   | 50   |
|----|--------------|---------------|------|------|------|------|------|------|------|------|
|    | 2500         | 1.00          | 1.10 | 1.18 | 1.23 | 1.29 | 1.29 | -    | -    | -    |
|    | 2300         | 0.95          | 0.95 | 1.00 | 1.00 | 1.02 | 1.05 | 1.08 | -    | -    |
|    | 2200         | 0.88          | 0.88 | 0.92 | 0.95 | 0.98 | 1.00 | 1.02 | 1.05 | 1.09 |
|    | 2100         | 0.80          | 0.82 | 0.85 | 0.90 | 0.92 | 0.95 | 0.95 | 0.98 | 1.02 |
|    | 1800         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.85 | 0.85 |
|    | 1500         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
|    | 1200         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| P2 | Speed r.p.m. | from 03 to 10 | 12   | 14   | 17   | 20   | 22   | 25   | 28   | 31   |
|    | 2800         | 1.00          | 1.00 | 1.00 | 1.03 | 1.03 | 1.05 |      |      |      |
|    | 2500         | 0.90          | 0.92 | 0.95 | 0.95 | 0.95 | 0.98 | 1.05 | 1.08 | 1.11 |
|    | 2300         | 0.80          | 0.85 | 0.85 | 0.90 | 0.90 | 0.90 | 0.95 | 0.98 | 1.0  |
|    | 2200         | 0.80          | 0.80 | 0.80 | 0.85 | 0.85 | 0.90 | 0.95 | 0.98 | 0.90 |
|    | 2100         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.85 | 0.90 | 0.90 | 0.85 |
|    | 1800         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
|    | 1500         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
|    | 1200         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |


\* measured inside the inlet flange; with petroleum base fluid (visc. 10 to 65 cSt.). Multiply the abs. pressure by 1.25 when using water-glycol or "water in oil emulsion", by 1.35 with synthetic fluids, and by 1.1 with ester or rapeseed base.

## Main operating data


**noise level** (model 38+22, with fluid viscosity 32 c.St., inlet 0.9 bar abs.)

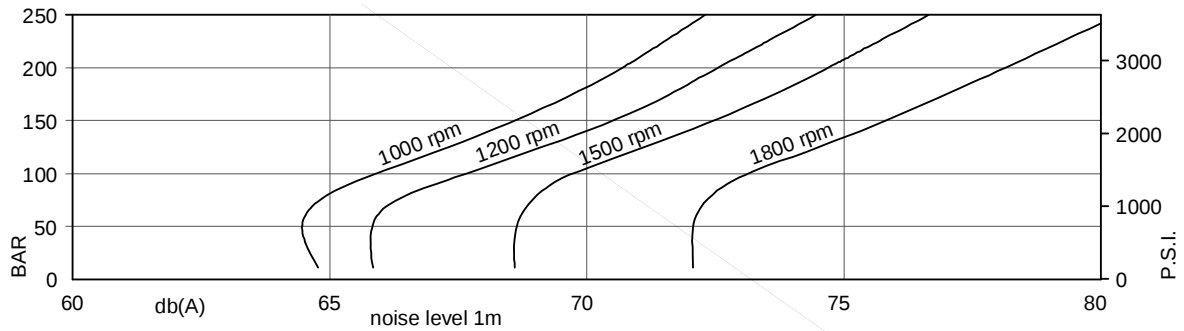


**allowable radial load** (max. permissible axial load = 120 daN)

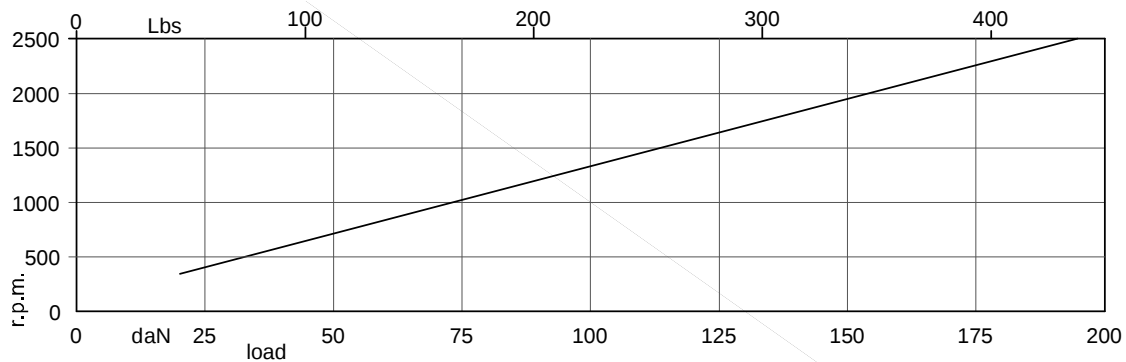

**power loss (typical)**

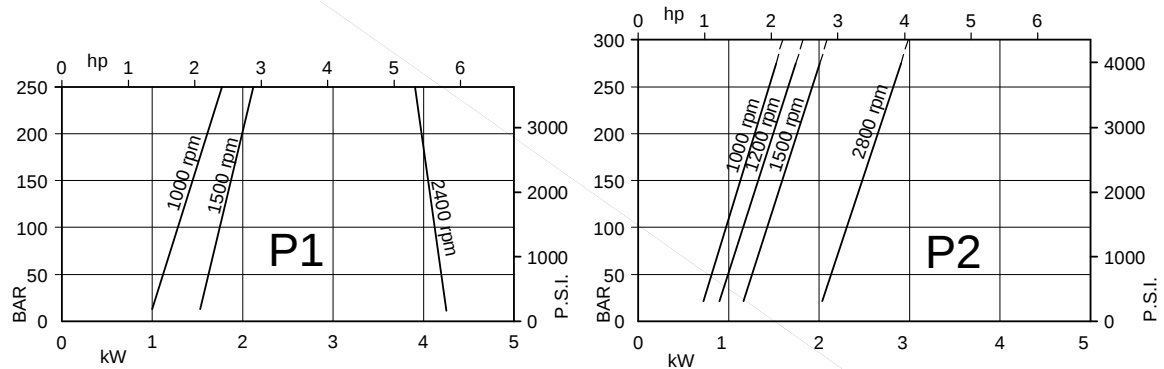

**Typical internal leakage \***  
(total leakage is the sum of each sector)

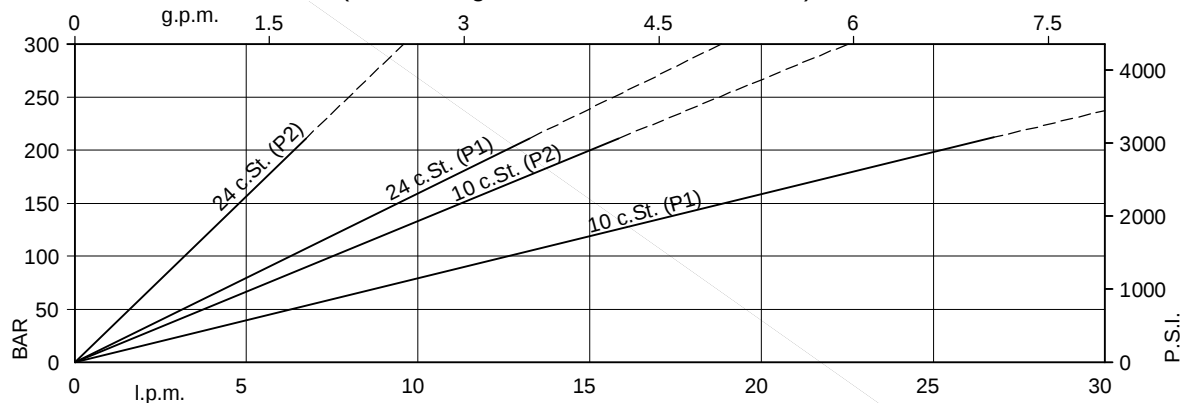

\* If the internal leakage is more than 50% of the theoretical flow, do not operate the pump

## Main operating data

### P1 section

Typical: 24 c.St. (115 SUS)

| Cartridge model         | Geometric displacement |                      | Speed rpm | 140 bar |         | 240 bar             |                       | Input power (kW) |                    |                     |
|-------------------------|------------------------|----------------------|-----------|---------|---------|---------------------|-----------------------|------------------|--------------------|---------------------|
|                         | ml/rev.                | (in <sup>3</sup> /r) |           | l/min   | (gpm)   | l/min               | (gpm)                 | 7 bar (100 psi)  | 140 bar (2000 psi) | 240 bar (3500 psi)  |
| <b>14</b>               | 47,6                   | (2.90)               | 1000      | 38,3    | (10.13) | 32,1                | (8.49)                | 1.50             | 12.50              | 20.70               |
|                         |                        |                      | 1200      | 48,8    | (12.91) | 42,6                | (11.27)               | 1.80             | 14.43              | 24.44               |
|                         |                        |                      | 1500      | 62,1    | (16.43) | 55,9                | (14.79)               | 2.30             | 18.50              | 30.60               |
|                         |                        |                      | 1800      | 77,3    | (20.46) | 71,1                | (18.82)               | 2.96             | 21.57              | 36.31               |
| <b>20</b>               | 66,0                   | (4.03)               | 1000      | 56,7    | (15.00) | 50,5                | (13.36)               | 1.70             | 16.80              | 28.00               |
|                         |                        |                      | 1200      | 70,8    | (18.74) | 64,6                | (17.10)               | 2.05             | 19.44              | 33.20               |
|                         |                        |                      | 1500      | 89,7    | (23.73) | 83,5                | (22.09)               | 2.80             | 24.90              | 41.70               |
|                         |                        |                      | 1800      | 110,4   | (29.21) | 104,2               | (27.57)               | 3.33             | 29.09              | 49.47               |
| <b>24</b>               | 79,5                   | (4.85)               | 1000      | 70,2    | (18.57) | 64,0                | (16.93)               | 1.90             | 19.90              | 33.40               |
|                         |                        |                      | 1200      | 87,02   | (23.02) | 80,8                | (21.38)               | 2.23             | 23.11              | 39.63               |
|                         |                        |                      | 1500      | 110,0   | (29.10) | 103,8               | (27.46)               | 3.00             | 29.60              | 49.80               |
|                         |                        |                      | 1800      | 134,7   | (35.63) | 128,5               | (33.99)               | 3.61             | 34.61              | 59.12               |
| <b>28</b>               | 89,7                   | (5.47)               | 1000      | 80,4    | (21.27) | 74,2                | (19.63)               | 2.00             | 22.30              | 37.50               |
|                         |                        |                      | 1200      | 99,3    | (26.26) | 93,1                | (24.62)               | 2.37             | 25.89              | 44.49               |
|                         |                        |                      | 1500      | 125,2   | (33.12) | 119,0               | (31.48)               | 3.20             | 33.20              | 55.90               |
|                         |                        |                      | 1800      | 153,0   | (40.48) | 146,1               | (38.64)               | 3.82             | 38.77              | 66.41               |
| <b>31</b>               | 98,3                   | (6.00)               | 1000      | 89,0    | (23.54) | 82,8                | (21.90)               | 2.10             | 24.30              | 40.90               |
|                         |                        |                      | 1200      | 109,6   | (28.99) | 103,4               | (27.35)               | 2.49             | 28.23              | 48.59               |
|                         |                        |                      | 1500      | 138,1   | (36.53) | 131,9               | (34.89)               | 3.30             | 36.20              | 61.00               |
|                         |                        |                      | 1800      | 168,5   | (44.57) | 162,3               | (42.93)               | 4.00             | 42.28              | 72.55               |
| <b>35</b>               | 111,0                  | (6.77)               | 1000      | 101,7   | (26.90) | 95,5                | (25.26)               | 2.30             | 27.30              | 46.00               |
|                         |                        |                      | 1200      | 124,8   | (33.01) | 118,6               | (31.37)               | 2.66             | 31.68              | 54.64               |
|                         |                        |                      | 1500      | 157,2   | (41.59) | 151,0               | (39.95)               | 3.50             | 40.70              | 68.70               |
|                         |                        |                      | 1800      | 191,3   | (50.61) | 185,1               | (48.97)               | 4.25             | 47.47              | 81.63               |
| <b>38</b>               | 120,3                  | (7.34)               | 1000      | 111,0   | (29.37) | 104,8               | (27.72)               | 2.40             | 29.40              | 49.80               |
|                         |                        |                      | 1200      | 135,9   | (35.96) | 129,7               | (34.32)               | 2.79             | 36.42              | 59.07               |
|                         |                        |                      | 1500      | 171,1   | (45.26) | 164,9               | (43.62)               | 3.70             | 43.90              | 74.30               |
|                         |                        |                      | 1800      | 208,0   | (55.03) | 201,8               | (53.39)               | 4.45             | 51.27              | 88.28               |
| <b>42 <sup>1)</sup></b> | 136,0                  | (8.30)               | 1000      | 126,7   | (33.52) | 120,5               | (31.88)               | 2.60             | 33.10              | 56.00               |
|                         |                        |                      | 1200      | 154,7   | (40.94) | 148,6               | (39.30)               | 3.00             | 38.49              | 66.56               |
|                         |                        |                      | 1500      | 194,7   | (51.51) | 188,5               | (49.87)               | 4.00             | 49.40              | 83.70               |
|                         |                        |                      | 1800      | 236,3   | (62.50) | 230,1               | (60.86)               | 4.76             | 57.68              | 99.50               |
| <b>45 <sup>1)</sup></b> | 145,7                  | (8.89)               | 1000      | 136,4   | (36.08) | 130,2               | (34.44)               | 2.70             | 35.30              | 59.90               |
|                         |                        |                      | 1200      | 166,4   | (44.01) | 160,2               | (42.37)               | 3.14             | 41.14              | 71.18               |
|                         |                        |                      | 1500      | 209,2   | (55.34) | 203,0               | (53.70)               | 4.10             | 52.80              | 89.50               |
|                         |                        |                      | 1800      | 253,7   | (67.11) | 247,5               | (65.47)               | 4.96             | 61.64              | 106.43              |
| <b>50 <sup>1)</sup></b> | 158,0                  | (9.64)               | 1000      | 148,7   | (39.34) | 145,0 <sup>2)</sup> | (38.36) <sup>2)</sup> | 2.80             | 38.20              | 56.80 <sup>2)</sup> |
|                         |                        |                      | 1200      | 181,1   | (47.91) | 176,6 <sup>2)</sup> | (46.73) <sup>2)</sup> | 3.30             | 44.48              | 66.19 <sup>2)</sup> |
|                         |                        |                      | 1500      | 227,7   | (30.24) | 224,0 <sup>2)</sup> | (59.26) <sup>2)</sup> | 4.40             | 57.00              | 85.00 <sup>2)</sup> |
|                         |                        |                      | 1800      | 275,8   | (72.96) | 271,3 <sup>2)</sup> | (71.78) <sup>2)</sup> | 5.21             | 66.67              | 99.02 <sup>2)</sup> |

1) 2200 r.p.m. max.

2) 210 bar (3000p.s.i.) max. int.

## Main operating data

### P2 section

Typical: 24 c.St. (115 SUS)

| Cartridge model        | Geometric displacement |                      | Speed rpm | 140 bar |         | 240 bar              |                       | Input power (kW) |                    |                     |
|------------------------|------------------------|----------------------|-----------|---------|---------|----------------------|-----------------------|------------------|--------------------|---------------------|
|                        | ml/rev.                | (in <sup>3</sup> /r) |           | l/min   | (gpm)   | l/min                | (gpm)                 | 7 bar (100 psi)  | 140 bar (2000 psi) | 240 bar (3500 psi)  |
| <b>03</b>              | 10,8                   | (0.66)               | 1000      | -       | -       | -                    | -                     | 1.00             | -                  | -                   |
|                        |                        |                      | 1200      | -       | -       | -                    | -                     | 1.05             | -                  | -                   |
|                        |                        |                      | 1500      | 10,7    | (2.84)  | -                    | -                     | 1.30             | 5.30               | -                   |
|                        |                        |                      | 1800      | 13,6    | (3.61)  | -                    | -                     | 1.55             | 8.45               | -                   |
| <b>05</b>              | 17,2                   | (1.05)               | 1000      | 11,7    | (3.09)  | -                    | -                     | 1.10             | 5.10               | -                   |
|                        |                        |                      | 1200      | 15,1    | (3.99)  | -                    | -                     | 1.14             | 8.17               | -                   |
|                        |                        |                      | 1500      | 20,3    | (5.37)  | 15,8                 | (4.18)                | 1.40             | 7.50               | 12.2                |
|                        |                        |                      | 1800      | 25,1    | (6.65)  | 21,0                 | (5.56)                | 1.68             | 12.0               | 14.4                |
| <b>06</b>              | 21,3                   | (1.30)               | 1000      | 15,80   | (4.18)  | 11,30                | (2.99)                | 1.10             | 6.00               | 10.00               |
|                        |                        |                      | 1200      | 19,73   | (5.22)  | 15,61                | (4.13)                | 1.19             | 7.13               | 11.86               |
|                        |                        |                      | 1500      | 26,50   | (7.01)  | 22,00                | (5.82)                | 1.50             | 8.90               | 14.70               |
|                        |                        |                      | 1800      | 32,51   | (8.60)  | 28,39                | (7.51)                | 1.76             | 10.50              | 17.33               |
| <b>08</b>              | 26,4                   | (1.61)               | 1000      | 20,90   | (5.53)  | 16,40                | (4.34)                | 1.20             | 7.20               | 12.10               |
|                        |                        |                      | 1200      | 25,86   | (6.84)  | 21,74                | (5.75)                | 1.26             | 8.51               | 14.29               |
|                        |                        |                      | 1500      | 34,10   | (9.02)  | 29,60                | (7.83)                | 1.60             | 10.70              | 17.70               |
|                        |                        |                      | 1800      | 41,66   | (11.02) | 37,54                | (9.93)                | 1.87             | 12.58              | 20.98               |
| <b>10</b>              | 34,1                   | (2.08)               | 1000      | 28,60   | (7.57)  | 24,10                | (6.38)                | 1.30             | 8.90               | 15.10               |
|                        |                        |                      | 1200      | 35,08   | (9.28)  | 30,96                | (8.19)                | 1.37             | 10.61              | 17.96               |
|                        |                        |                      | 1500      | 45,70   | (12.09) | 41,20                | (10.90)               | 1.70             | 13.40              | 22.30               |
|                        |                        |                      | 1800      | 55,53   | (14.69) | 51,41                | (13.60)               | 2.03             | 15.72              | 26.47               |
| <b>12</b>              | 37,1                   | (2.26)               | 1000      | 31,60   | (8.36)  | 27,10                | (7.17)                | 1.30             | 9.60               | 16.30               |
|                        |                        |                      | 1200      | 38,67   | (10.23) | 34,55                | (9.14)                | 1.41             | 11.42              | 19.38               |
|                        |                        |                      | 1500      | 50,20   | (13.28) | 45,70                | (12.09)               | 1.70             | 14.40              | 24.10               |
|                        |                        |                      | 1800      | 60,90   | (16.11) | 56,78                | (15.02)               | 2.09             | 16.95              | 28.62               |
| <b>14</b>              | 46,0                   | (2.81)               | 1000      | 40,50   | (10.71) | 36,00                | (9.52)                | 1.40             | 11.70              | 19.90               |
|                        |                        |                      | 1200      | 49,33   | (13.05) | 45,21                | (11.96)               | 1.53             | 13.85              | 23.62               |
|                        |                        |                      | 1500      | 63,50   | (16.80) | 59,00                | (15.61)               | 1.90             | 17.60              | 29.50               |
|                        |                        |                      | 1800      | 76,92   | (20.35) | 72,80                | (19.26)               | 2.27             | 20.58              | 34.97               |
| <b>17</b>              | 58,3                   | (3.56)               | 1000      | 52,80   | (13.97) | 48,30                | (12.78)               | 1.60             | 14.50              | 24.80               |
|                        |                        |                      | 1200      | 64,07   | (16.95) | 59,95                | (15.86)               | 1.70             | 17.19              | 29.47               |
|                        |                        |                      | 1500      | 82,00   | (21.69) | 77,50                | (20.50)               | 2.10             | 21.90              | 36.90               |
|                        |                        |                      | 1800      | 99,04   | (26.20) | 94,92                | (25.11)               | 2.52             | 25.60              | 43.76               |
| <b>20</b>              | 63,8                   | (3.89)               | 1000      | 58,30   | (15.42) | 53,80                | (14.23)               | 1.60             | 15.80              | 27.00               |
|                        |                        |                      | 1200      | 70,69   | (18.70) | 66,57                | (17.61)               | 1.77             | 18.68              | 32.09               |
|                        |                        |                      | 1500      | 90,20   | (23.86) | 85,70                | (22.67)               | 2.20             | 23.80              | 40.20               |
|                        |                        |                      | 1800      | 108,90  | (28.81) | 103,65               | (27.42)               | 2.63             | 27.84              | 47.68               |
| <b>22</b>              | 70,3                   | (4.29)               | 1000      | 64,80   | (17.14) | 60,30                | (15.95)               | 1.70             | 17.30              | 29.60               |
|                        |                        |                      | 1200      | 78,47   | (20.76) | 74,35                | (19.67)               | 1.86             | 20.46              | 35.18               |
|                        |                        |                      | 1500      | 100,00  | (26.46) | 95,50                | (25.26)               | 2.30             | 26.10              | 44.10               |
|                        |                        |                      | 1800      | 120,58  | (31.90) | 116,46               | (30.81)               | 2.76             | 30.49              | 52.32               |
| <b>25<sup>1)</sup></b> | 79,3                   | (4.84)               | 1000      | 73,80   | (19.52) | 69,30                | (18.33)               | 1.80             | 19.30              | 33.20               |
|                        |                        |                      | 1200      | 89,25   | (23.61) | 85,13                | (22.52)               | 1.99             | 22.90              | 39.47               |
|                        |                        |                      | 1500      | 113,50  | (30.03) | 109,00               | (28.84)               | 2.50             | 29.20              | 49.50               |
|                        |                        |                      | 1800      | 136,76  | (36.18) | 132,64               | (35.09)               | 2.95             | 34.16              | 58.75               |
| <b>28<sup>1)</sup></b> | 88,8                   | (5.42)               | 1000      | 83,30   | (22.04) | 80,10 <sup>2)</sup>  | (21.19) <sup>2)</sup> | 1.90             | 21.90              | 32.50 <sup>2)</sup> |
|                        |                        |                      | 1200      | 100,62  | (26.62) | 97,75 <sup>2)</sup>  | (25.86) <sup>2)</sup> | 2.11             | 25.49              | 37.77 <sup>2)</sup> |
|                        |                        |                      | 1500      | 127,70  | (33.78) | 124,50 <sup>2)</sup> | (32.94) <sup>2)</sup> | 2.80             | 32.70              | 48.50 <sup>2)</sup> |
|                        |                        |                      | 1800      | 153,85  | (40.70) | 150,97 <sup>2)</sup> | (39.94) <sup>2)</sup> | 3.14             | 38.04              | 56.42 <sup>2)</sup> |
| <b>31<sup>1)</sup></b> | 100,0                  | (6.10)               | 1000      | 94,50   | (25.00) | 91,30 <sup>2)</sup>  | (24.15) <sup>2)</sup> | 2.00             | 24.40              | 36.40 <sup>2)</sup> |
|                        |                        |                      | 1200      | 114,04  | (30.17) | 111,17 <sup>2)</sup> | (29.41) <sup>2)</sup> | 2.26             | 28.53              | 42.34 <sup>2)</sup> |
|                        |                        |                      | 1500      | 144,50  | (38.23) | 141,30 <sup>2)</sup> | (37.38) <sup>2)</sup> | 2.80             | 36.50              | 54.40 <sup>2)</sup> |
|                        |                        |                      | 1800      | 173,99  | (46.03) | 171,12 <sup>2)</sup> | (45.27) <sup>2)</sup> | 3.37             | 42.61              | 63.28 <sup>2)</sup> |


-) Internal leakage exceeding 50% of the theoretical flow

1) 2500 r.p.m. max.

2) 210 bar (3000p.s.i.) max. int.

## Installation dimensions


mm (inches)

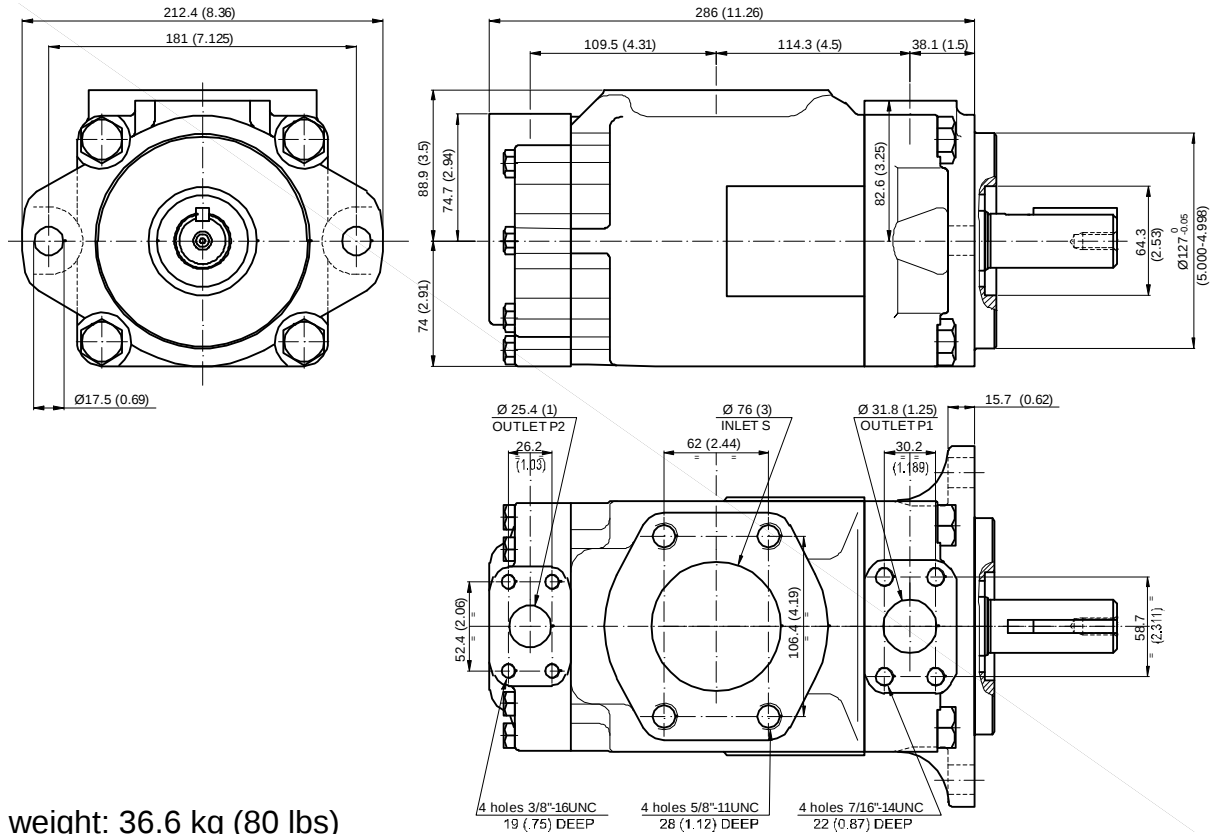

Approx weight: 36.6 kg (80 lbs)

## Shaft options

mm (inches)

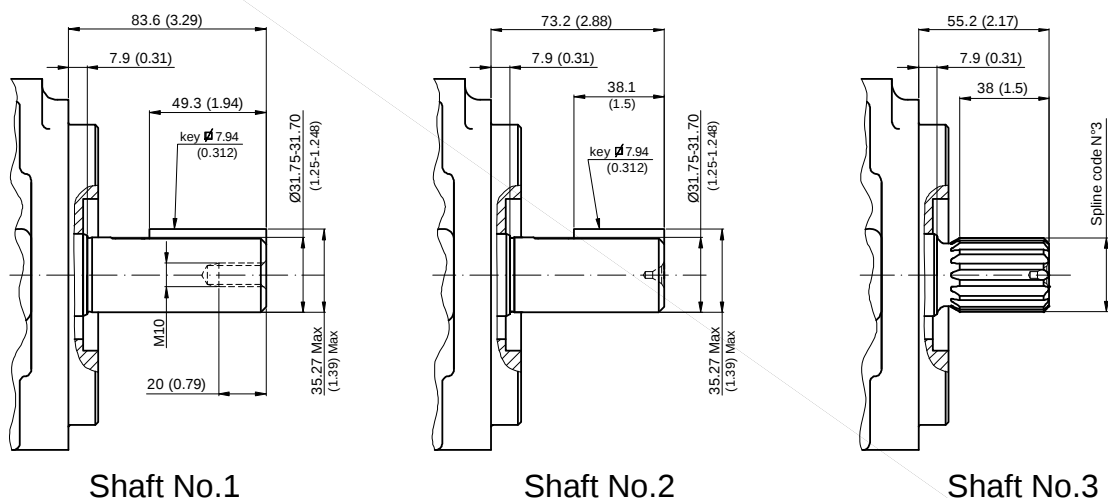

Shaft No.1

Shaft No.2

Shaft No.3

**Calculation of the max permitted torque:**  
(avoid to exceed)



| Shaft No. | (ml/rev) x bar<br>P1+P2 | (in3/rev) x psi<br>P1+P2 |
|-----------|-------------------------|--------------------------|
| 1         | 43240                   | 38300                    |
| 2         | 34590                   | 30638                    |
| 3         | 61200                   | 54207                    |

**Spline code**



**3**

|                |                    |
|----------------|--------------------|
| Designation    | Sae C              |
| Pressure angle | 30°                |
| No. of teeth   | 14                 |
| Pitch          | 12/24 d.p.         |
| Spline type    | flat root side fit |
| Class          | 1- J498 b          |

## Model code breakdown

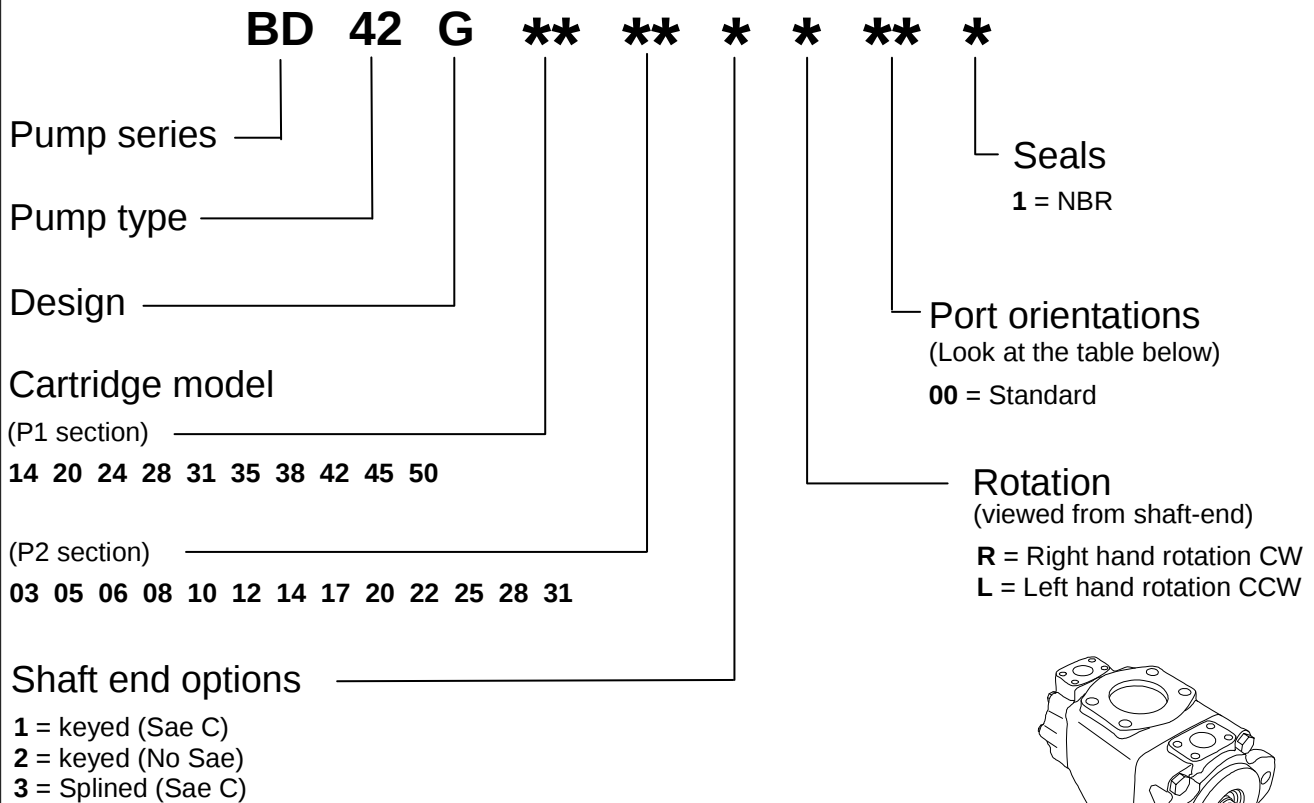

Port orientations

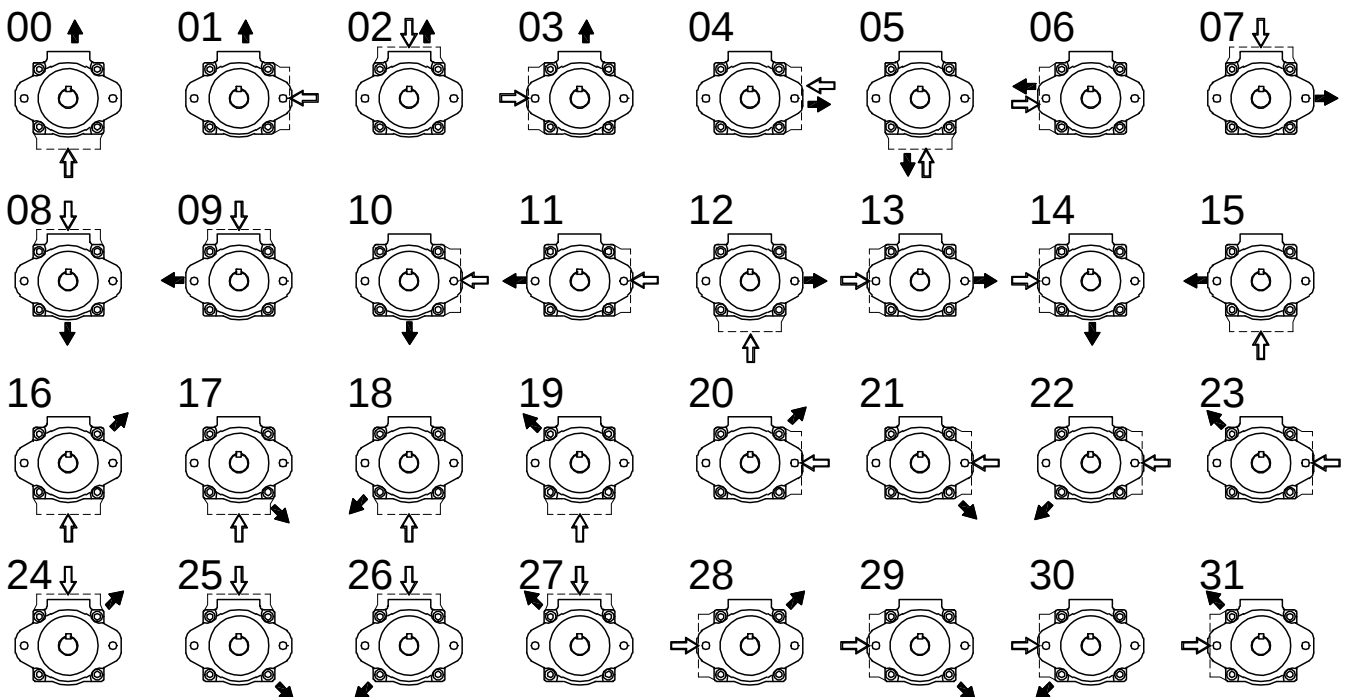

## Id. codes of pump components

| Rear cartridge |       |               |           |
|----------------|-------|---------------|-----------|
| Type           | Model | Pump rotation |           |
|                |       | Right hand    | Left hand |
| BD42           | 03    | N0500230      | N0500240  |
|                | 05    | N0500250      | N0500260  |
|                | 06    | N0500270      | N0500280  |
|                | 08    | N0500290      | N0500300  |
|                | 10    | N0500310      | N0500320  |
|                | 12    | N0500330      | N0500340  |
|                | 14    | N0500350      | N0500360  |
|                | 17    | N0500370      | N0500380  |
|                | 20    | N0500390      | N0500400  |
|                | 22    | N0500410      | N0500420  |
|                | 25    | N0500430      | N0500440  |
|                | 28    | N0500450      | N0500460  |
|                | 31    | N0500470      | N0500480  |

| Front cartridge |       |               |           |
|-----------------|-------|---------------|-----------|
| Type            | Model | Pump rotation |           |
|                 |       | Right hand    | Left hand |
| BD42            | 14    | N0500010      | N0500020  |
|                 | 20    | N0500050      | N0500060  |
|                 | 24    | N0500070      | N0500080  |
|                 | 28    | N0500090      | N0500100  |
|                 | 31    | N0500110      | N0500120  |
|                 | 35    | N0500130      | N0500140  |
|                 | 38    | N0500150      | N0500160  |
|                 | 42    | N0500170      | N0500180  |
|                 | 45    | N0500190      | N0500200  |
|                 | 50    | N0500210      | N0500220  |


| Shaft |          |
|-------|----------|
| Model | Part No. |
| 01    | K6411000 |
| 02    | K6412000 |
| 03    | K6413000 |


| Screw                          |          |
|--------------------------------|----------|
| Part No.                       | M3040130 |
| Torque at 187 Nm (1668 lb.in.) |          |

| Shaft seal |      |
|------------|------|
| Part No.   | type |
| M3040060   | NBR  |

| Screw                        |          |
|------------------------------|----------|
| Part No.                     | M3040140 |
| Torque at 68 Nm (606 lb.in.) |          |

| Pump seal kit |      |
|---------------|------|
| Part No.      | Type |
| M3042500      | NBR  |

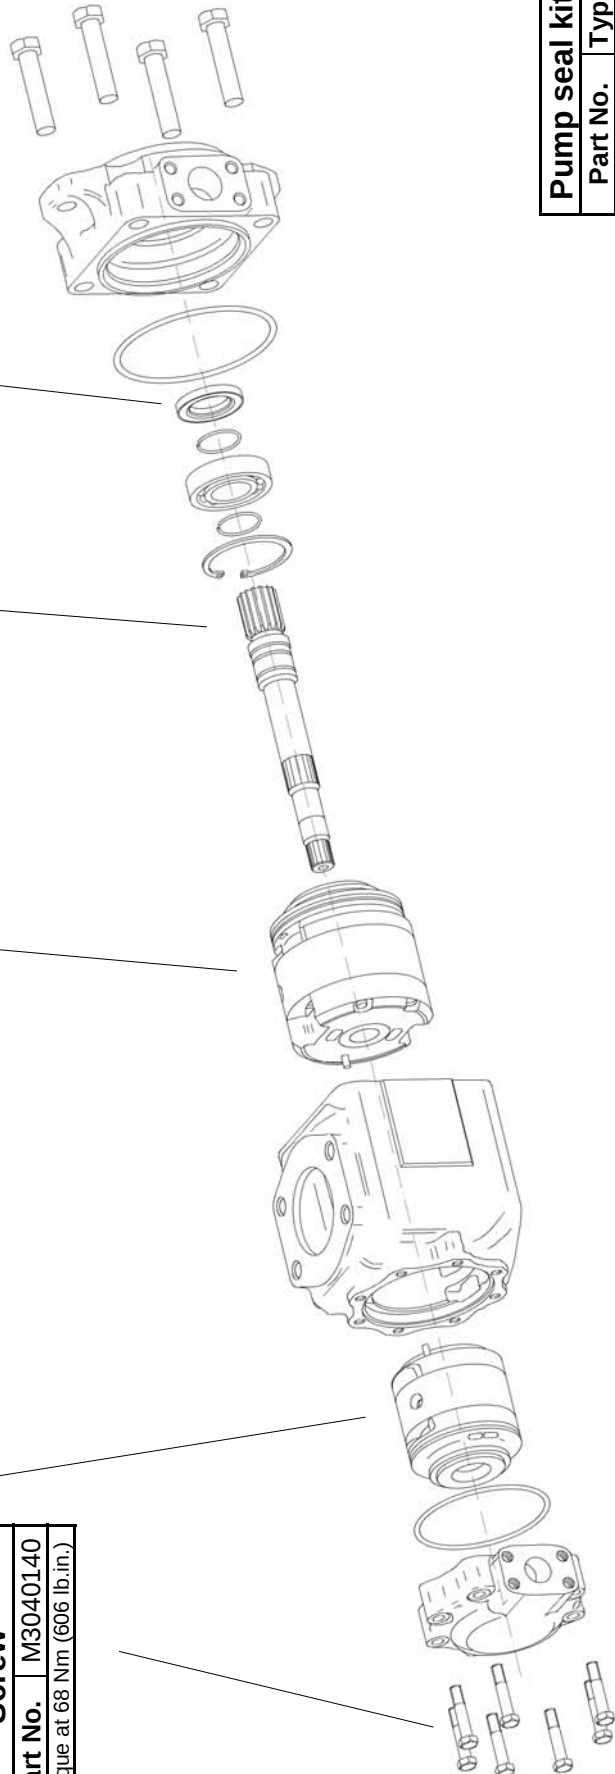

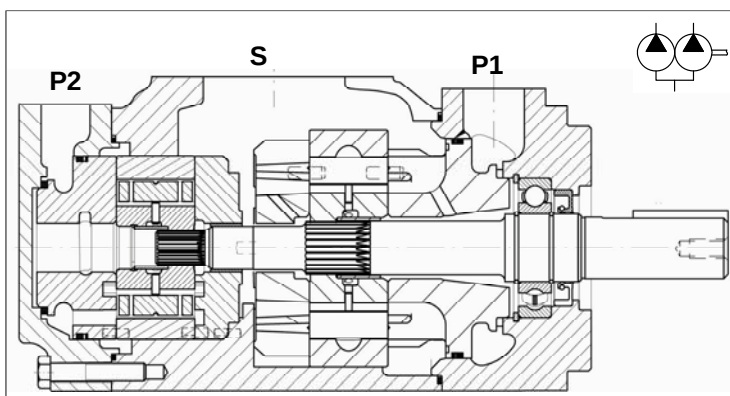

## General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in several versions with rated capacity from 230 to 490 l/min (from 61 to 130 gpm) at 1500 rpm and pressure 0 bar.

## Technical characteristics

| Cartridge model |    | Geometric displacement |                      | Rated capacity at 0 bar |         |          |         | Maximum pressure |        |           |        | Speed range |
|-----------------|----|------------------------|----------------------|-------------------------|---------|----------|---------|------------------|--------|-----------|--------|-------------|
|                 |    |                        |                      | 1200 rpm                |         | 1500 rpm |         | intermittent     |        | continuos |        |             |
|                 |    | ml/rev.                | (in <sup>3</sup> /r) | l/min                   | (gpm)   | l/min    | (gpm)   | bar              | (psi)  | bar       | (psi)  |             |
| P1              | 45 | 142,4                  | (8.69)               | 170.7                   | (45.15) | 213.6    | (56.51) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
|                 | 50 | 158,5                  | (9.67)               | 189.9                   | (50.25) | 237.7    | (62.88) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
|                 | 52 | 164,8                  | (10.06)              | 197.5                   | (52.25) | 247.2    | (65.40) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
|                 | 62 | 196,7                  | (12.00)              | 235.7                   | (62.36) | 295.0    | (78.04) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
|                 | 66 | 213,3                  | (13.02)              | 255.6                   | (67.62) | 319.9    | (84.63) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
|                 | 72 | 227,1                  | (13.86)              | 272.2                   | (72.00) | 340.6    | (90.11) | 240              | (3500) | 210       | (3000) | 400 - 2200  |
| P2              | 03 | 10,8                   | (0.66)               | 12,93                   | (3.42)  | 16,2     | (4.29)  | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 05 | 17,2                   | (1.05)               | 20,60                   | (5.45)  | 25,8     | (6.83)  | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 06 | 21,3                   | (1.30)               | 25,52                   | (6.75)  | 31,9     | (8.44)  | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 08 | 26,4                   | (1.61)               | 31,64                   | (8.37)  | 39,6     | (10.48) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 10 | 34,1                   | (2.08)               | 40,86                   | (10.81) | 51,1     | (13.52) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 12 | 37,1                   | (2.26)               | 44,45                   | (11.76) | 55,6     | (14.71) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 14 | 46,0                   | (2.81)               | 55,11                   | (14.58) | 69,0     | (18.25) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 17 | 58,3                   | (3.56)               | 69,85                   | (18.48) | 87,4     | (23.12) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 20 | 63,8                   | (3.89)               | 76,47                   | (20.23) | 95,7     | (25.32) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 22 | 70,3                   | (4.29)               | 84,26                   | (22.29) | 105,4    | (27.88) | 275              | (4000) | 240       | (3500) | 400 - 2800  |
|                 | 25 | 79,3                   | (4.84)               | 95,03                   | (25.14) | 118,9    | (31.46) | 275              | (4000) | 240       | (3500) | 400 - 2500  |
|                 | 28 | 88,8                   | (5.42)               | 106,41                  | (28.15) | 133,2    | (35.24) | 210              | (3000) | 160       | (2300) | 400 - 2500  |
|                 | 31 | 100,0                  | (6.10)               | 119,83                  | (31.70) | 150,0    | (39.68) | 210              | (3000) | 160       | (2300) | 400 - 2500  |

**Hydraulic fluids:** antiwear petroleum base, synthetic fluid, water glycols and invert emulsions.

**Viscosity range / Viscosity index:** with antiwear petroleum base, from 10 to 2000 cSt. (10 to 108 cSt. recommended). Other fluids from 18 to 2000 cSt. (18 to 108 cSt. recomm.). Choose 30 cSt. for max lifetime.  
**Viscosity index:** 90° min.

**Filtration:** to maintain contamination level to ISO 18/14 or NAS 1638 class 8. Filters: for the inlet, use strainer with mesh not less than 149 micron abs. (omit strainer with application requiring cold start or when using fire resistant fluids); for the return line - 25 micron abs. or better.

**Water contamination level:** max 0.10% for mineral oil. With other fluids, max 0.05%

**Intermittent pressure:** typically the working time permitted at such pressure is < 30% of the duty cycle. With duty cycles longer than 15 minutes, please contact the technical office of B&C.


**Minimum inlet pressure:** (with mineral oil 10-65 cSt.): 0,8 bar abs. (3 psi abs.). In the biggest displacements of each series and with the highest speeds, is required an higher inlet pressure. Please consult the specific section for details. In case of tandem pump, supply the inlet port with the highest pressure requested among the pump stages.

**Operating temperature:** with "antiwear petroleum base" the permitted temperature is: from -18 to +100° C; with water glycol and "water in oil emulsion": from +10 to +50°C; with syntetic fluid: from -18 to +70°C; with rapeseed and esters: from -20 to + 70°C. During cold start the pumps should be operated at low speed and pressure until fluid warms up to an acceptable viscosity for full power operation.


**Drive:** direct and coaxial by means of a flexible coupling. Low axial and radial loads allowed. Consult specific section for more detail.

## Main operating data

### max pressure / fluid type

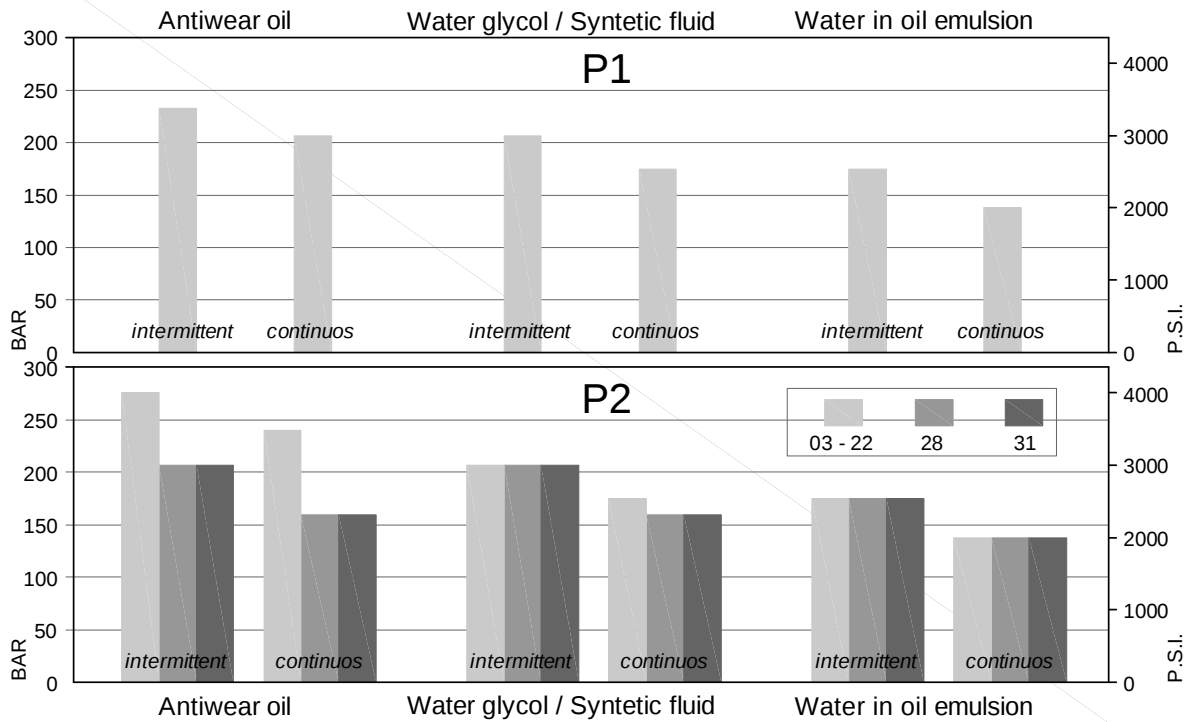

### max speed / fluid type

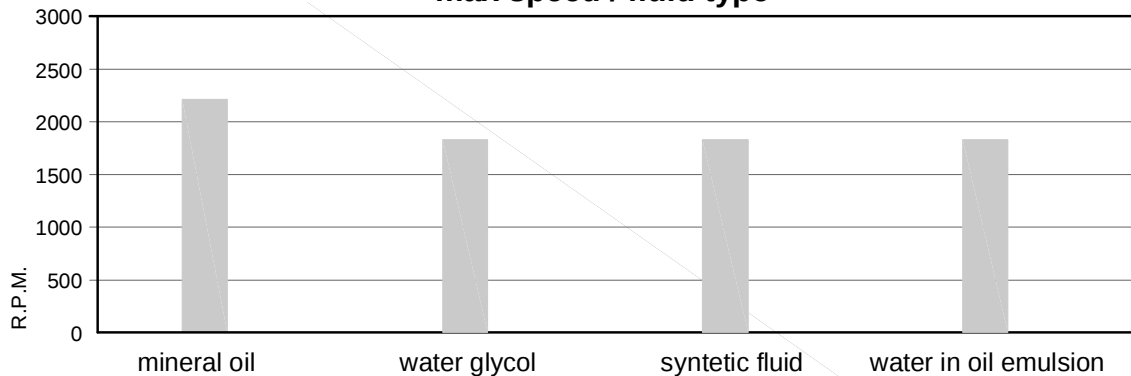

### min. allowable inlet pressure / rotation speed (abs. bar)\*


| P1 | Speed r.p.m. | 45            | 50   | 52   | 62   | 66   | 72   |      |      |      |
|----|--------------|---------------|------|------|------|------|------|------|------|------|
|    | 2200         | 1.00          | 1.00 | 1.00 | 1.00 | 1.09 | 1.05 |      |      |      |
|    | 2100         | 0.90          | 0.90 | 0.90 | 0.95 | 1.00 | 1.00 |      |      |      |
|    | 1800         | 0.80          | 0.80 | 0.80 | 0.85 | 0.95 | 0.85 |      |      |      |
|    | 1500         | 0.80          | 0.80 | 0.80 | 0.80 | 0.85 | 0.85 |      |      |      |
|    | 1200         | 0.80          | 0.80 | 0.80 | 0.80 | 0.85 | 0.85 |      |      |      |
| P2 | Speed r.p.m. | from 03 to 10 | 12   | 14   | 17   | 20   | 22   | 25   | 28   | 31   |
|    | 2800         | 1.00          | 1.00 | 1.00 | 1.03 | 1.03 | 1.05 |      |      |      |
|    | 2500         | 0.90          | 0.92 | 0.95 | 0.95 | 0.95 | 0.98 | 1.05 | 1.08 | 1.11 |
|    | 2300         | 0.80          | 0.85 | 0.85 | 0.90 | 0.90 | 0.90 | 0.95 | 0.98 | 1.0  |
|    | 2200         | 0.80          | 0.80 | 0.80 | 0.85 | 0.85 | 0.90 | 0.95 | 0.98 | 0.90 |
|    | 2100         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.85 | 0.90 | 0.90 | 0.85 |
|    | 1800         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
|    | 1500         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
|    | 1200         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |

\* measured inside the inlet flange; with petroleum base fluid (visc. 10 to 65 cSt.).


Multiply the abs. pressure by 1.25 when using water-glycol or "water in oil emulsion", by 1.35 with synthetic fluids, and by 1.1 with ester or rapeseed base.

## Main operating data


**noise level** (model 50 + 22, with fluid viscosity 32 c.St., inlet 0.9 bar abs.)

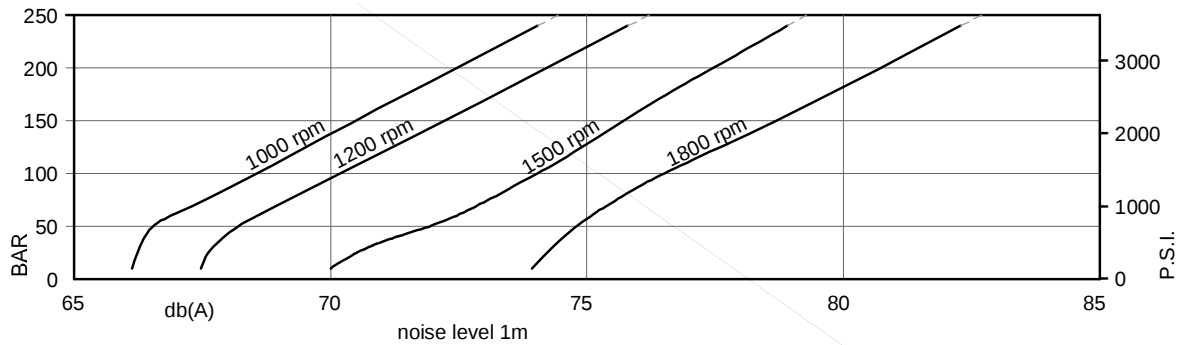


**allowable radial load** (max. permissible axial load = 200 daN)

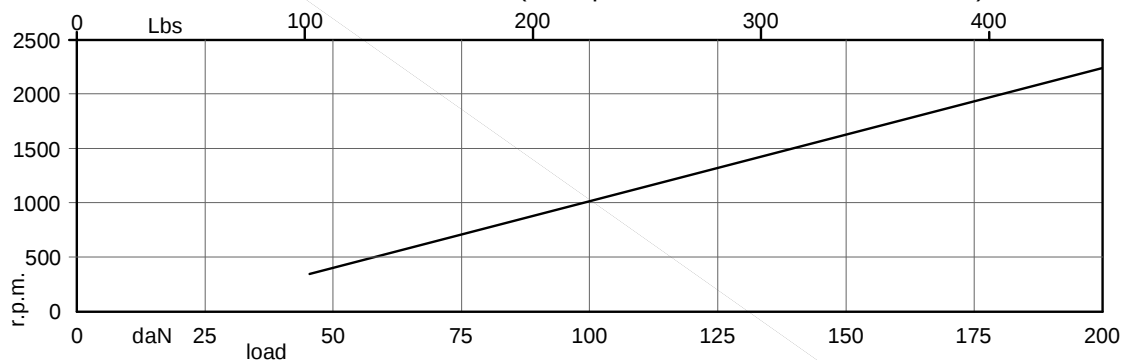

**power loss (typical)**

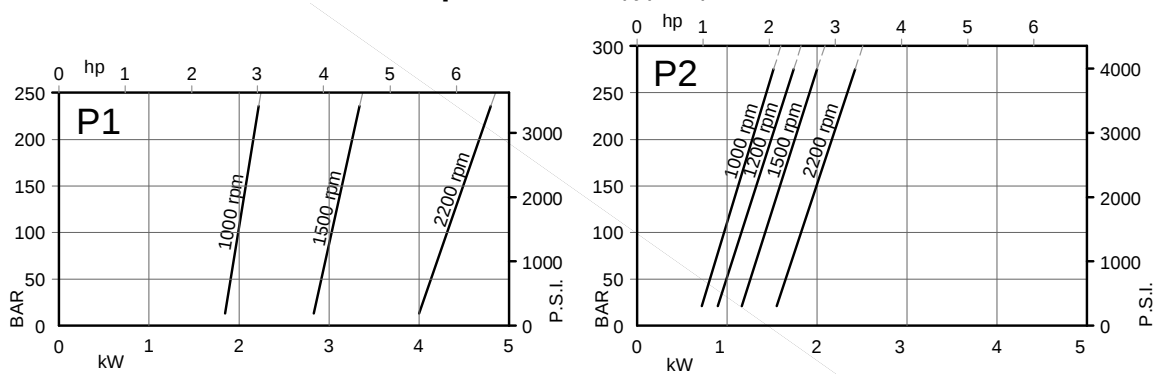

**Typical internal leakage \***  
(total leakage is the sum of each sector)

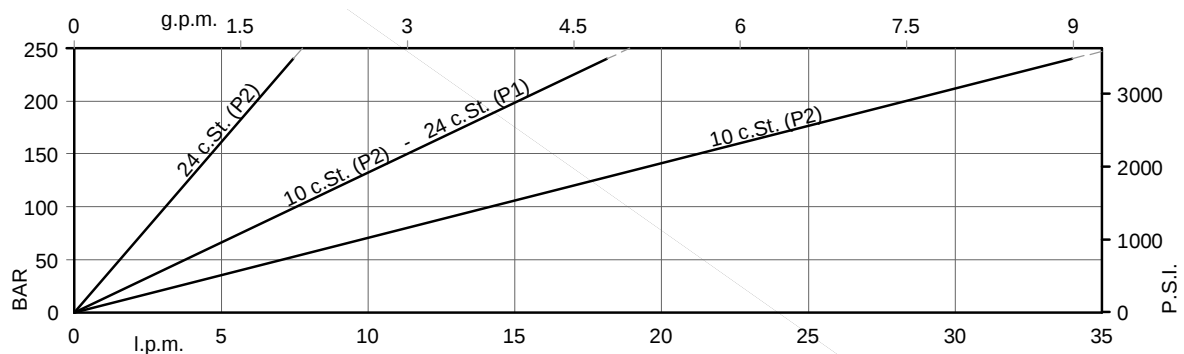

\* If the internal leakage is more than 50% of the theoretical flow, do not operate the pump

## Main operating data

### P1 section

Typical: 24 c.St. (115 SUS)

| Cartridge model | Geometric displacement |                      | Speed rpm | 140 bar |          | 240 bar |          | Input power (kW) |                    |                    |
|-----------------|------------------------|----------------------|-----------|---------|----------|---------|----------|------------------|--------------------|--------------------|
|                 | ml/rev.                | (in <sup>3</sup> /r) |           | l/min   | (gpm)    | l/min   | (gpm)    | 7 bar (100 psi)  | 140 bar (2000 psi) | 240 bar (3500 psi) |
| <b>45</b>       | 142,4                  | (8.69)               | 1000      | 132,4   | (35.03)  | 125,3   | (33.15)  | 3.40             | 35.30              | 59.20              |
|                 |                        |                      | 1200      | 161,0   | (42.60)  | 154,0   | (40.75)  | 3.18             | 40.24              | 69.43              |
|                 |                        |                      | 1500      | 203,6   | (53.86)  | 196,5   | (51.98)  | 5.40             | 52.90              | 88.70              |
|                 |                        |                      | 1800      | 246,3   | (65.17)  | 239,3   | (63.32)  | 5.05             | 60.36              | 104.05             |
| <b>50</b>       | 158,5                  | (9.67)               | 1000      | 148,5   | (39.29)  | 141,4   | (37.41)  | 3.50             | 39.00              | 65.60              |
|                 |                        |                      | 1200      | 180,3   | (47.70)  | 173,3   | (45.85)  | 3.40             | 44.62              | 77.10              |
|                 |                        |                      | 1500      | 227,7   | (60.24)  | 220,6   | (58.36)  | 5.70             | 58.50              | 98.30              |
|                 |                        |                      | 1800      | 275,3   | (72.83)  | 268,3   | (70.98)  | 5.38             | 66.93              | 115.55             |
| <b>52</b>       | 164,8                  | (10.06)              | 1000      | 154,8   | (40.95)  | 147,7   | (39.07)  | 3.60             | 40.50              | 68.20              |
|                 |                        |                      | 1200      | 187,9   | (49.70)  | 180,9   | (47.85)  | 3.49             | 46.33              | 80.10              |
|                 |                        |                      | 1500      | 237,2   | (62.75)  | 230,1   | (60.87)  | 5.80             | 60.80              | 102.10             |
|                 |                        |                      | 1800      | 286,6   | (75.82)  | 279,6   | (73.97)  | 5.51             | 69.50              | 120.05             |
| <b>62</b>       | 196,7                  | (12.00)              | 1000      | 186,7   | (49.39)  | 179,6   | (47.51)  | 4.00             | 47.90              | 80.90              |
|                 |                        |                      | 1200      | 226,1   | (59.81)  | 219,1   | (57.96)  | 3.93             | 55.01              | 95.28              |
|                 |                        |                      | 1500      | 285,0   | (75.40)  | 277,9   | (73.52)  | 6.40             | 71.90              | 121.30             |
|                 |                        |                      | 1800      | 343,9   | (90.99)  | 336,9   | (89.14)  | 6.16             | 82.51              | 142.83             |
| <b>66</b>       | 213,3                  | (13.02)              | 1000      | 203,3   | (53.78)  | 196,2   | (51.90)  | 4.20             | 51.80              | 87.60              |
|                 |                        |                      | 1200      | 246,0   | (65.07)  | 239,0   | (63.22)  | 4.15             | 59.52              | 103.18             |
|                 |                        |                      | 1500      | 309,9   | (81.98)  | 302,8   | (80.11)  | 6.70             | 77.70              | 131.20             |
|                 |                        |                      | 1800      | 373,8   | (98.89)  | 366,8   | (97.04)  | 6.50             | 89.29              | 154.68             |
| <b>72</b>       | 227,1                  | (13.86)              | 1000      | 217,1   | (57.43)  | 210,0   | (55.56)  | 4.30             | 55.00              | 93.10              |
|                 |                        |                      | 1200      | 262,5   | (69.45)  | 255,5   | (67.60)  | 4.34             | 63.27              | 109.75             |
|                 |                        |                      | 1500      | 330,6   | (87.46)  | 323,5   | (85.58)  | 6.90             | 82.60              | 139.50             |
|                 |                        |                      | 1800      | 398,6   | (105.45) | 391,6   | (103.60) | 6.78             | 94.92              | 164.54             |

## Main operating data

### P2 section

Typical: 24 c.St. (115 SUS)


| Cartridge model | Geometric displacement |                      | Speed rpm | 140 bar |         | 240 bar              |                       | Input power (kW) |                    |                     |
|-----------------|------------------------|----------------------|-----------|---------|---------|----------------------|-----------------------|------------------|--------------------|---------------------|
|                 | ml/rev.                | (in <sup>3</sup> /r) |           | l/min   | (gpm)   | l/min                | (gpm)                 | 7 bar (100 psi)  | 140 bar (2000 psi) | 240 bar (3500 psi)  |
| 03              | 10,8                   | (0.66)               | 1000      | -       | -       | -                    | -                     | 1.00             | -                  | -                   |
|                 |                        |                      | 1200      | -       | -       | -                    | -                     | 1.05             | -                  | -                   |
|                 |                        |                      | 1500      | 10,7    | (2.84)  | -                    | -                     | 1.30             | 5.30               | -                   |
|                 |                        |                      | 1800      | 13,6    | (3.61)  | -                    | -                     | 1.55             | 8.45               | -                   |
| 05              | 17,2                   | (1.05)               | 1000      | 11,7    | (3.09)  | -                    | -                     | 1.10             | 5.10               | -                   |
|                 |                        |                      | 1200      | 15,1    | (3.99)  | -                    | -                     | 1.14             | 8.17               | -                   |
|                 |                        |                      | 1500      | 20,3    | (5.37)  | 15,8                 | (4.18)                | 1.40             | 7.50               | 12.2                |
|                 |                        |                      | 1800      | 25,1    | (6.65)  | 21,0                 | (5.56)                | 1.68             | 12.0               | 14.4                |
| 06              | 21,3                   | (1.30)               | 1000      | 15,80   | (4.18)  | 11,30                | (2.99)                | 1.10             | 6.00               | 10.00               |
|                 |                        |                      | 1200      | 19,73   | (5.22)  | 15,61                | (4.13)                | 1.19             | 7.13               | 11.86               |
|                 |                        |                      | 1500      | 26,50   | (7.01)  | 22,00                | (5.82)                | 1.50             | 8.90               | 14.70               |
|                 |                        |                      | 1800      | 32,51   | (8.60)  | 28,39                | (7.51)                | 1.76             | 10.50              | 17.33               |
| 08              | 26,4                   | (1.61)               | 1000      | 20,90   | (5.53)  | 16,40                | (4.34)                | 1.20             | 7.20               | 12.10               |
|                 |                        |                      | 1200      | 25,86   | (6.84)  | 21,74                | (5.75)                | 1.26             | 8.51               | 14.29               |
|                 |                        |                      | 1500      | 34,10   | (9.02)  | 29,60                | (7.83)                | 1.60             | 10.70              | 17.70               |
|                 |                        |                      | 1800      | 41,66   | (11.02) | 37,54                | (9.93)                | 1.87             | 12.58              | 20.98               |
| 10              | 34,1                   | (2.08)               | 1000      | 28,60   | (7.57)  | 24,10                | (6.38)                | 1.30             | 8.90               | 15.10               |
|                 |                        |                      | 1200      | 35,08   | (9.28)  | 30,96                | (8.19)                | 1.37             | 10.61              | 17.96               |
|                 |                        |                      | 1500      | 45,70   | (12.09) | 41,20                | (10.90)               | 1.70             | 13.40              | 22.30               |
|                 |                        |                      | 1800      | 55,53   | (14.69) | 51,41                | (13.60)               | 2.03             | 15.72              | 26.47               |
| 12              | 37,1                   | (2.26)               | 1000      | 31,60   | (8.36)  | 27,10                | (7.17)                | 1.30             | 9.60               | 16.30               |
|                 |                        |                      | 1200      | 38,67   | (10.23) | 34,55                | (9.14)                | 1.41             | 11.42              | 19.38               |
|                 |                        |                      | 1500      | 50,20   | (13.28) | 45,70                | (12.09)               | 1.70             | 14.40              | 24.10               |
|                 |                        |                      | 1800      | 60,90   | (16.11) | 56,78                | (15.02)               | 2.09             | 16.95              | 28.62               |
| 14              | 46,0                   | (2.81)               | 1000      | 40,50   | (10.71) | 36,00                | (9.52)                | 1.40             | 11.70              | 19.90               |
|                 |                        |                      | 1200      | 49,33   | (13.05) | 45,21                | (11.96)               | 1.53             | 13.85              | 23.62               |
|                 |                        |                      | 1500      | 63,50   | (16.80) | 59,00                | (15.61)               | 1.90             | 17.60              | 29.50               |
|                 |                        |                      | 1800      | 76,92   | (20.35) | 72,80                | (19.26)               | 2.27             | 20.58              | 34.97               |
| 17              | 58,3                   | (3.56)               | 1000      | 52,80   | (13.97) | 48,30                | (12.78)               | 1.60             | 14.50              | 24.80               |
|                 |                        |                      | 1200      | 64,07   | (16.95) | 59,95                | (15.86)               | 1.70             | 17.19              | 29.47               |
|                 |                        |                      | 1500      | 82,00   | (21.69) | 77,50                | (20.50)               | 2.10             | 21.90              | 36.90               |
|                 |                        |                      | 1800      | 99,04   | (26.20) | 94,92                | (25.11)               | 2.52             | 25.60              | 43.76               |
| 20              | 63,8                   | (3.89)               | 1000      | 58,30   | (15.42) | 53,80                | (14.23)               | 1.60             | 15.80              | 27.00               |
|                 |                        |                      | 1200      | 70,69   | (18.70) | 66,57                | (17.61)               | 1.77             | 18.68              | 32.09               |
|                 |                        |                      | 1500      | 90,20   | (23.86) | 85,70                | (22.67)               | 2.20             | 23.80              | 40.20               |
|                 |                        |                      | 1800      | 108,90  | (28.81) | 103,65               | (27.42)               | 2.63             | 27.84              | 47.68               |
| 22              | 70,3                   | (4.29)               | 1000      | 64,80   | (17.14) | 60,30                | (15.95)               | 1.70             | 17.30              | 29.60               |
|                 |                        |                      | 1200      | 78,47   | (20.76) | 74,35                | (19.67)               | 1.86             | 20.46              | 35.18               |
|                 |                        |                      | 1500      | 100,00  | (26.46) | 95,50                | (25.26)               | 2.30             | 26.10              | 44.10               |
|                 |                        |                      | 1800      | 120,58  | (31.90) | 116,46               | (30.81)               | 2.76             | 30.49              | 52.32               |
| 25              | 79,3                   | (4.84)               | 1000      | 73,80   | (19.52) | 69,30                | (18.33)               | 1.80             | 19.30              | 33.20               |
|                 |                        |                      | 1200      | 89,25   | (23.61) | 85,13                | (22.52)               | 1.99             | 22.90              | 39.47               |
|                 |                        |                      | 1500      | 113,50  | (30.03) | 109,00               | (28.84)               | 2.50             | 29.20              | 49.50               |
|                 |                        |                      | 1800      | 136,76  | (36.18) | 132,64               | (35.09)               | 2.95             | 34.16              | 58.75               |
| 28              | 88,8                   | (5.41)               | 1000      | 83,30   | (22.04) | 80,10 <sup>1)</sup>  | (21.19) <sup>1)</sup> | 1.90             | 21.90              | 32.50 <sup>1)</sup> |
|                 |                        |                      | 1200      | 100,62  | (26.61) | 97,75 <sup>1)</sup>  | (25.86) <sup>1)</sup> | 2.11             | 25.49              | 37.77 <sup>1)</sup> |
|                 |                        |                      | 1500      | 127,70  | (33.78) | 124,50 <sup>1)</sup> | (32.94) <sup>1)</sup> | 2.80             | 32.70              | 48.50 <sup>1)</sup> |
|                 |                        |                      | 1800      | 153,85  | (40.70) | 150,97 <sup>1)</sup> | (39.94) <sup>1)</sup> | 3.14             | 38.04              | 56.42 <sup>1)</sup> |
| 31              | 100,0                  | (6.10)               | 1000      | 94,50   | (25.00) | 91,30 <sup>1)</sup>  | (24.15) <sup>1)</sup> | 2.00             | 24.40              | 36.40 <sup>1)</sup> |
|                 |                        |                      | 1200      | 114,04  | (30.17) | 111,17 <sup>1)</sup> | (29.41) <sup>1)</sup> | 2.26             | 28.53              | 42.34 <sup>1)</sup> |
|                 |                        |                      | 1500      | 144,50  | (38.23) | 141,30 <sup>1)</sup> | (37.38) <sup>1)</sup> | 2.80             | 36.50              | 54.40 <sup>1)</sup> |
|                 |                        |                      | 1800      | 173,99  | (46.03) | 171,12 <sup>1)</sup> | (45.27) <sup>1)</sup> | 3.37             | 42.61              | 63.28 <sup>1)</sup> |

-) Not to use because the internal leakage exceeding 50% of the theoretical flow

1) 210 bar (3000p.s.i.) max. int.

## Installation dimensions


mm (inches)

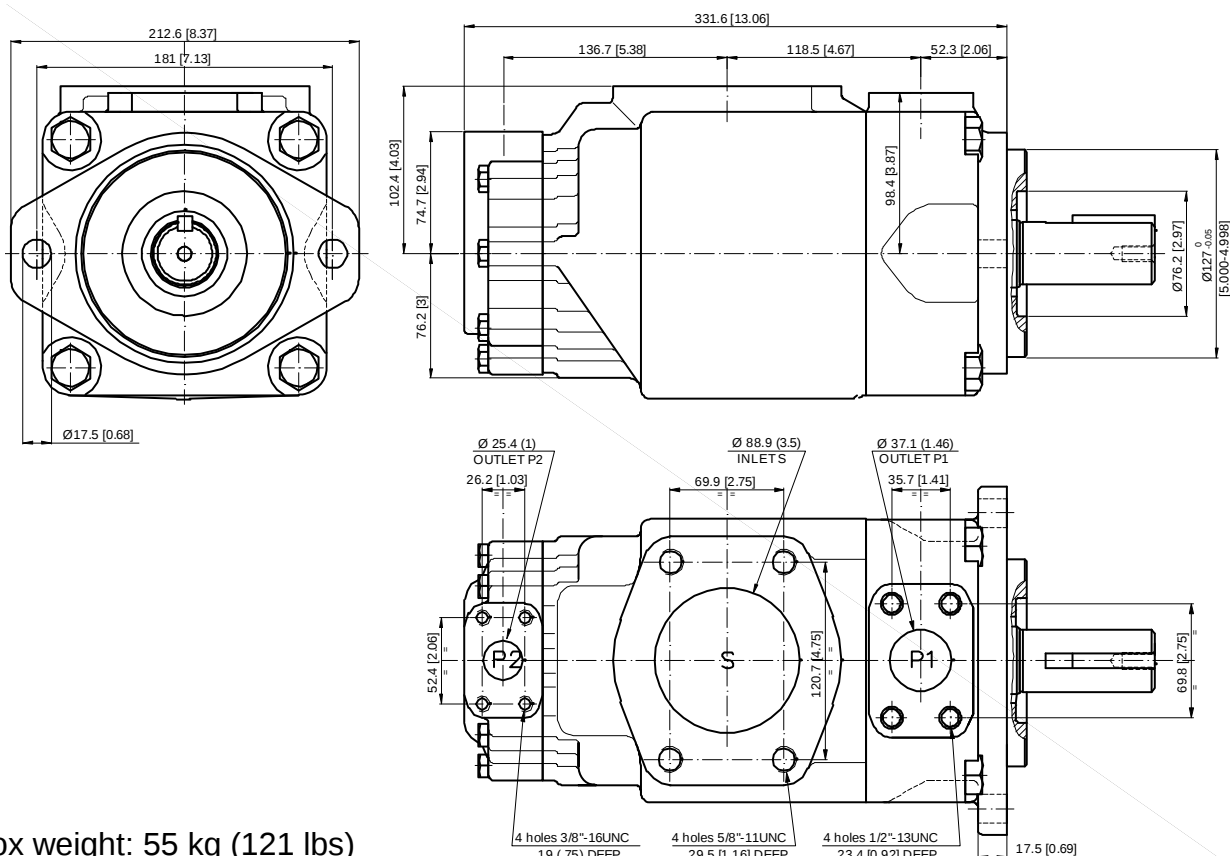

Approx weight: 55 kg (121 lbs)

## Shaft options

mm (inches)

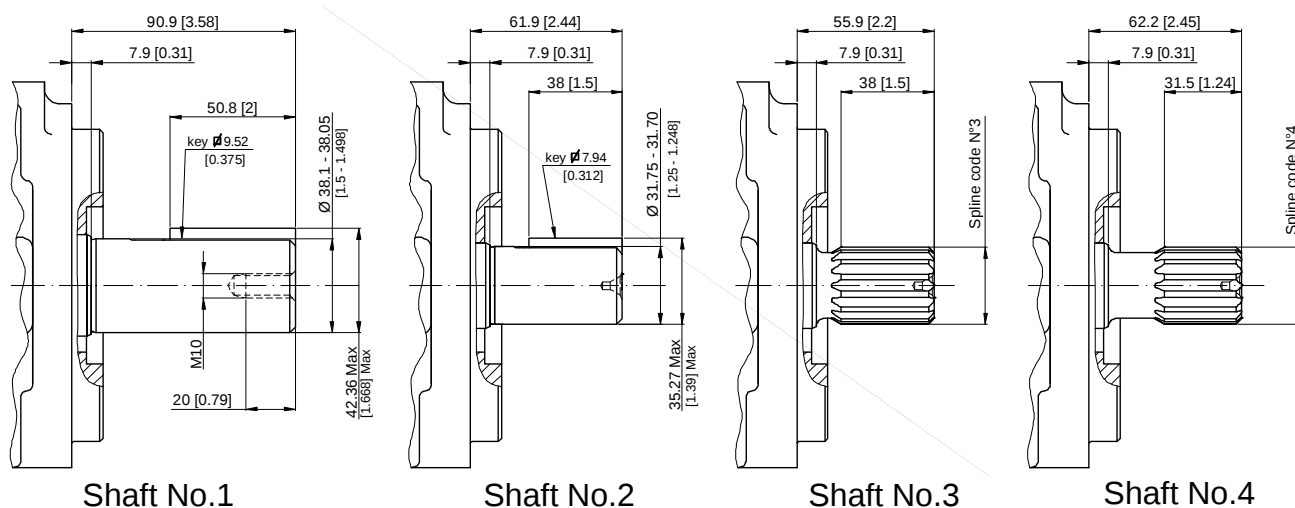



**Calculation of the max permitted torque:**  
(avoid to exceed)

| Shaft No. | (ml/rev) x bar<br>P1+P2 | (in3/rev) x psi<br>P1+P2 |
|-----------|-------------------------|--------------------------|
| 1         | 72306                   | 64044                    |
| 2         | 34590                   | 30638                    |
| 3         | 61200                   | 54207                    |
| 4         | 76376                   | 67582                    |



### Spline code

| Spline code    | 3                  | 4                  |
|----------------|--------------------|--------------------|
| Designation    | Sae C              | No Sae             |
| Pressure angle | 30°                | 30°                |
| No. of teeth   | 14                 | 17                 |
| Pitch          | 12/24 d.p.         | 12/24 d.p.         |
| Spline type    | flat root side fit | flat root side fit |
| Class          | 1- J498 b          | 1- J498 b          |

## Model code breakdown

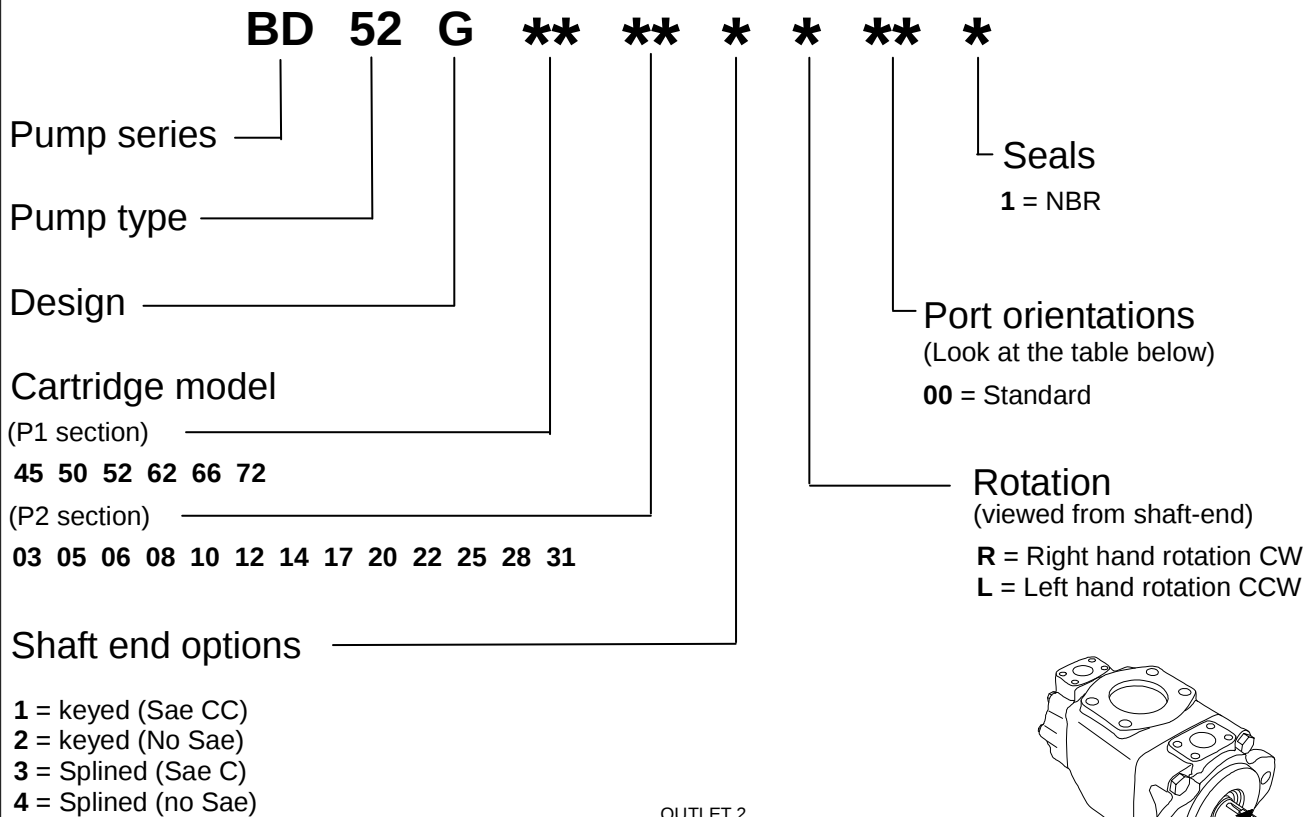

## Port orientations

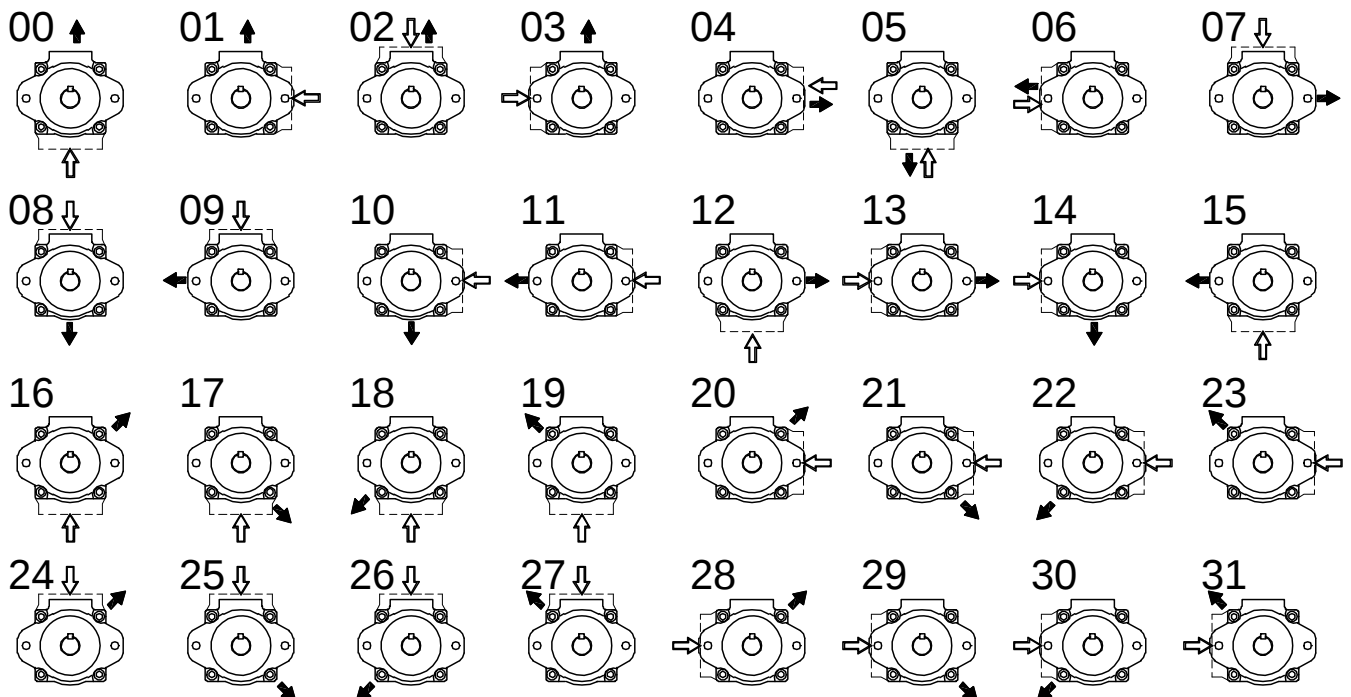

## Id. codes of pump components

| Rear cartridge |       |               |           |
|----------------|-------|---------------|-----------|
| Type           | Model | Pump rotation |           |
|                |       | Right hand    | Left hand |
| BD52           | 03    | N0500230      | N0500240  |
|                | 05    | N0500250      | N0500260  |
|                | 06    | N0500270      | N0500280  |
|                | 08    | N0500290      | N0500300  |
|                | 10    | N0500310      | N0500320  |
|                | 12    | N0500330      | N0500340  |
|                | 14    | N0500350      | N0500360  |
|                | 17    | N0500370      | N0500380  |
|                | 20    | N0500390      | N0500400  |
|                | 22    | N0500410      | N0500420  |
|                | 25    | N0500430      | N0500440  |
|                | 28    | N0500450      | N0500460  |
|                | 31    | N0500470      | N0500480  |

| Front cartridge |       |               |           |
|-----------------|-------|---------------|-----------|
| Type            | Model | Pump rotation |           |
|                 |       | Right hand    | Left hand |
| BD52            | 45    | N0600030      | N0600040  |
|                 | 50    | N0600050      | N0600060  |
|                 | 52    | N0600070      | N0600080  |
|                 | 62    | N0600090      | N0600100  |
|                 | 66    | N0600110      | N0600120  |
|                 | 72    | N0600130      | N0600140  |


| Shaft |          |
|-------|----------|
| Model | Part No. |
| 01    | K6511000 |
| 02    | K6512000 |
| 03    | K6513000 |
| 04    | K6514000 |


| Screw                        |          |
|------------------------------|----------|
| Part No.                     | M3040140 |
| Torque at 68 Nm (606 lb.in.) |          |

| Shaft seal |          |
|------------|----------|
| Part No.   | M3050060 |
| type       | NBR      |

| Screw                          |          |
|--------------------------------|----------|
| Part No.                       | M3050130 |
| Torque at 187 Nm (1668 lb.in.) |          |

| Pump seal kit |      |     |
|---------------|------|-----|
| Part No.      | Type | NBR |
| M3052500      | NBR  |     |

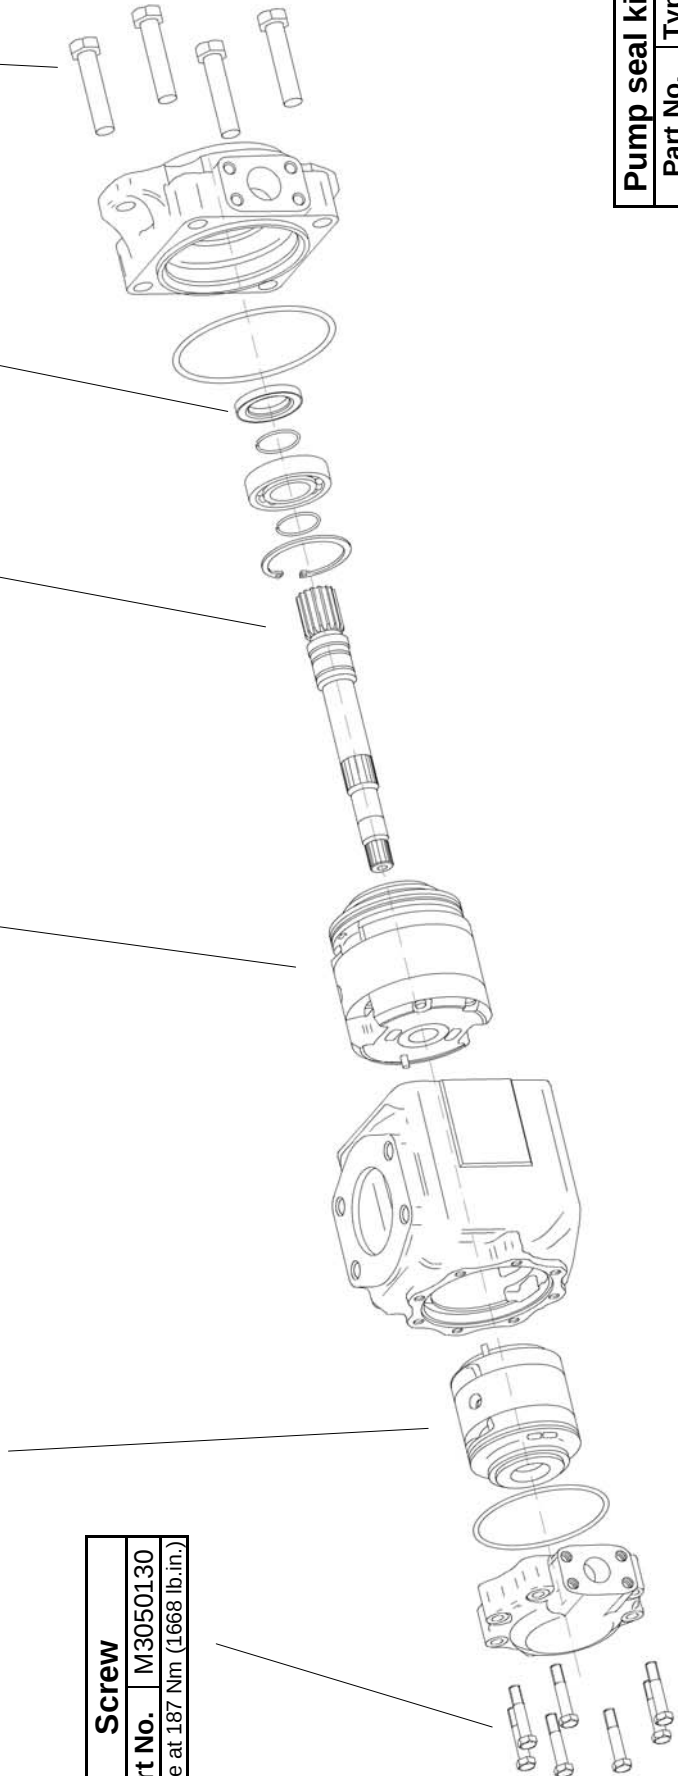

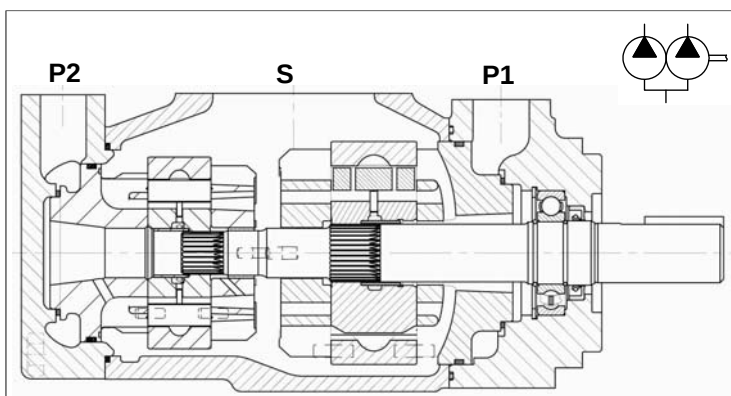

## General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in several versions with rated capacity from 285 to 577 l/min (from 75 to 153 gpm) at 1500 rpm and pressure 0 bar.

## Technical characteristics

| Cartridge model | Geometric displacement |                      | Rated capacity at 0 bar |         |          |         | Maximum pressure |        |            |        | Speed range |
|-----------------|------------------------|----------------------|-------------------------|---------|----------|---------|------------------|--------|------------|--------|-------------|
|                 |                        |                      | 1200 rpm                |         | 1500 rpm |         | intermittent     |        | continuous |        |             |
|                 | ml/rev.                | (in <sup>3</sup> /r) | l/min                   | (gpm)   | l/min    | (gpm)   | bar              | (psi)  | bar        | (psi)  | rpm         |
| 45              | 142,4                  | (8.69)               | 170.7                   | (45.15) | 213.6    | (56.51) | 240              | (3500) | 210        | (3000) | 400 - 2200  |
| 50              | 158,5                  | (9.67)               | 189.9                   | (50.25) | 237.7    | (62.88) | 240              | (3500) | 210        | (3000) | 400 - 2200  |
| 52              | 164,8                  | (10.06)              | 197.5                   | (52.25) | 247.2    | (65.40) | 240              | (3500) | 210        | (3000) | 400 - 2200  |
| 62              | 196,7                  | (12.00)              | 235.7                   | (62.36) | 295.0    | (78.04) | 240              | (3500) | 210        | (3000) | 400 - 2200  |
| 66              | 213,3                  | (13.02)              | 255.6                   | (67.62) | 319.9    | (84.63) | 240              | (3500) | 210        | (3000) | 400 - 2200  |
| 72              | 227,1                  | (13.86)              | 272.2                   | (72.00) | 340.6    | (90.11) | 240              | (3500) | 210        | (3000) | 400 - 2200  |
| 14              | 47,6                   | (2.90)               | 57,04                   | (15.09) | 71,4     | (18.89) | 240              | (3500) | 210        | (3000) | 400 - 2500  |
| 20              | 66,0                   | (4.03)               | 79,08                   | (20.92) | 99,0     | (26.19) | 240              | (3500) | 210        | (3000) | 400 - 2500  |
| 24              | 79,5                   | (4.85)               | 95,26                   | (25.20) | 119,3    | (31.56) | 240              | (3500) | 210        | (3000) | 400 - 2500  |
| 28              | 89,7                   | (5.47)               | 107,50                  | (28.44) | 134,5    | (35.58) | 240              | (3500) | 210        | (3000) | 400 - 2500  |
| 31              | 98,3                   | (6.00)               | 117,82                  | (31.17) | 147,4    | (38.99) | 240              | (3500) | 210        | (3000) | 400 - 2500  |
| 35              | 111,0                  | (6.77)               | 133,02                  | (35.19) | 166,5    | (44.05) | 240              | (3500) | 210        | (3000) | 400 - 2500  |
| 38              | 120,3                  | (7.34)               | 144,17                  | (38.14) | 180,4    | (47.72) | 240              | (3500) | 210        | (3000) | 400 - 2500  |
| 42              | 136,0                  | (8.30)               | 162,99                  | (43.12) | 204,0    | (53.97) | 240              | (3500) | 210        | (3000) | 400 - 2200  |
| 45              | 145,7                  | (8.89)               | 174,60                  | (46.19) | 218,5    | (57.80) | 240              | (3500) | 210        | (3000) | 400 - 2200  |
| 50              | 158,0                  | (9.64)               | 189,34                  | (50.09) | 237,0    | (62.70) | 210              | (3000) | 160        | (2300) | 400 - 2200  |

**Hydraulic fluids:** antiwear petroleum base, synthetic fluid, water glycols and invert emulsions.

**Viscosity range / Viscosity index:** with antiwear petroleum base, from 10 to 2000 cSt. (10 to 108 cSt. recommended). Other fluids from 18 to 2000 c.St. (18 to 108 c.St. recomm.). Choose 30 c.St. for max lifetime. *Viscosity index:* 90° min.

**Filtration:** to maintain contamination level to ISO 18/14 or NAS 1638 class 8. Filters: for the inlet, use strainer with mesh not less than 149 micron abs. (omit strainer with application requiring cold start or when using fire resistant fluids); for the return line - 25 micron abs. or better.

**Water contamination level:** max 0.10% for mineral oil. With other fluids, max 0.05%


**Intermittent pressure:** typically the working time permitted at such pressure is < 30% of the duty cycle. With duty cycles longer than 15 minutes, please contact the technical office of B&C.

**Minimum inlet pressure:** (with mineral oil 10-65 c.St.): 0,8 bar abs. (3 psi abs.). In the biggest displacements of each series and with the highest speeds, is required an higher inlet pressure. Please consult the specific section for details. In case of tandem pump, supply the inlet port with the highest pressure requested among the pump stages.

**Operating temperature:** with "antiwear petroleum base" the permitted temperature is: from -18 to +100° C; with water glycol and "water in oil emulsion": from +10 to +50°C; with syntetic fluid: from -18 to +70°C; with rapeseed and esters: from -20 to + 70°C. During cold start the pumps should be operated at low speed and pressure until fluid warms up to an acceptable viscosity for full power operation.

**Drive:** direct and coaxial by means of a flexible coupling. Low axial and radial loads allowed. Consult specific section for more detail.

## Main operating data

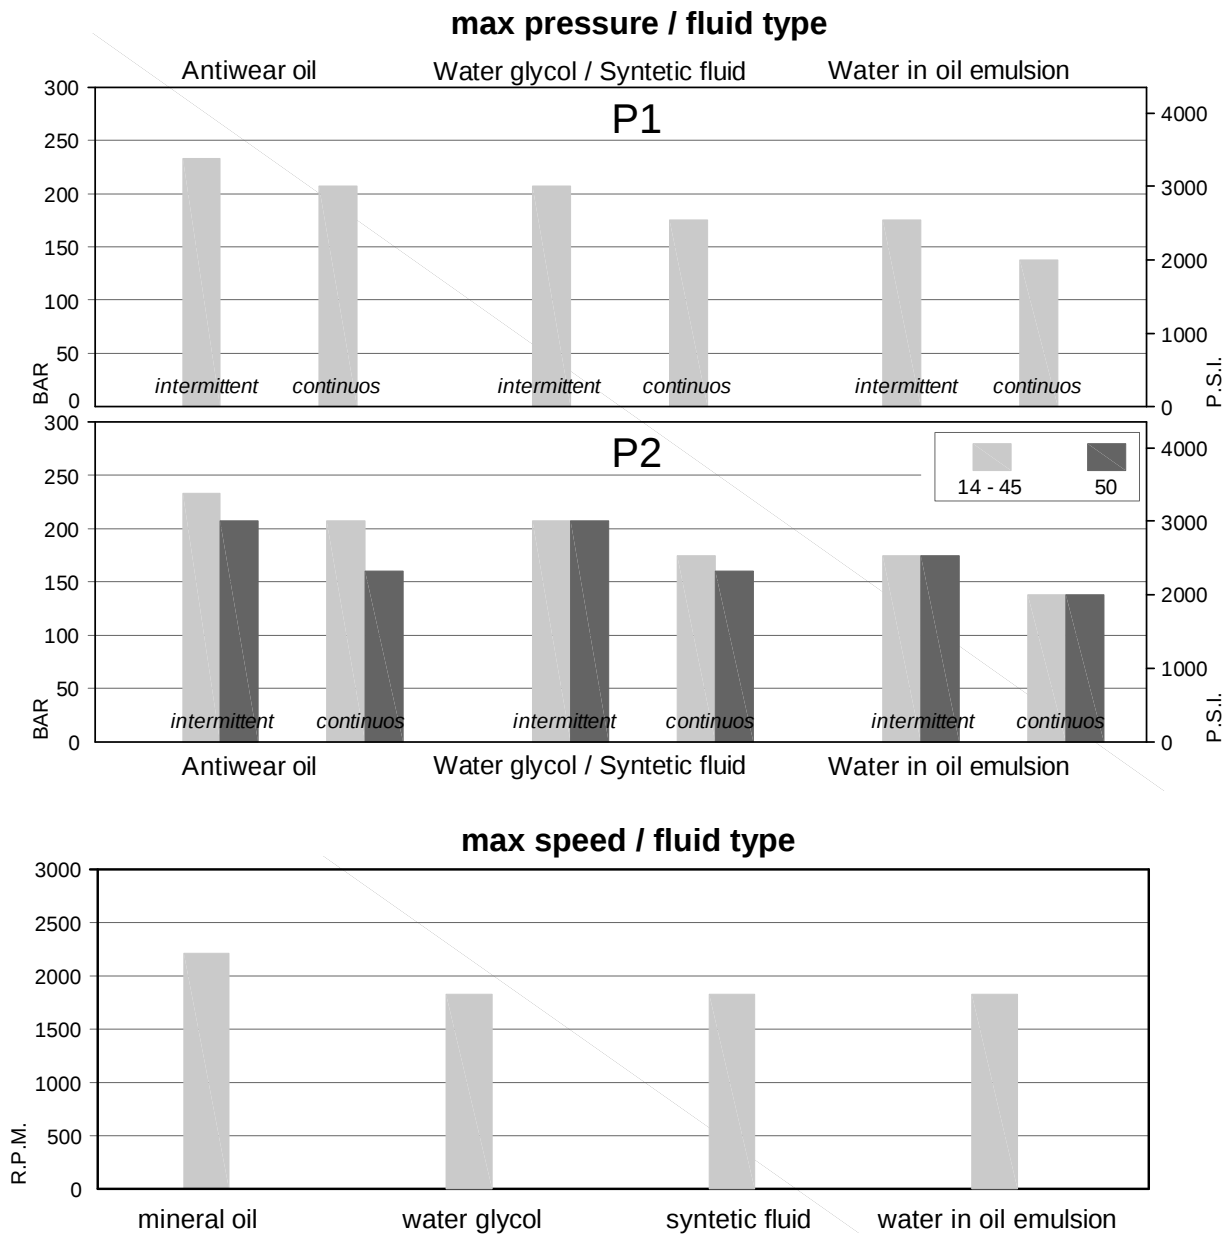

### min. allowable inlet pressure / rotation speed (abs. bar)\*


| P1 | Speed r.p.m. | 45            | 50   | 52   | 62   | 66   | 72   |      |      |      |
|----|--------------|---------------|------|------|------|------|------|------|------|------|
|    | 2200         | 1.00          | 1.00 | 1.00 | 1.00 | 1.09 | 1.05 |      |      |      |
|    | 2100         | 0.90          | 0.90 | 0.90 | 0.95 | 1.00 | 1.00 |      |      |      |
|    | 1800         | 0.80          | 0.80 | 0.80 | 0.85 | 0.95 | 0.85 |      |      |      |
|    | 1500         | 0.80          | 0.80 | 0.80 | 0.80 | 0.85 | 0.85 |      |      |      |
|    | 1200         | 0.80          | 0.80 | 0.80 | 0.80 | 0.85 | 0.85 |      |      |      |
| P2 | Speed r.p.m. | from 14 to 20 | 24   | 28   | 31   | 35   | 38   | 42   | 45   | 50   |
|    | 2500         | 1.00          | 1.10 | 1.18 | 1.23 | 1.29 | 1.29 | -    | -    | -    |
|    | 2300         | 0.95          | 0.95 | 1.00 | 1.00 | 1.02 | 1.05 | 1.08 | -    | -    |
|    | 2200         | 0.88          | 0.88 | 0.92 | 0.95 | 0.98 | 1.00 | 1.02 | 1.05 | 1.09 |
|    | 2100         | 0.80          | 0.82 | 0.85 | 0.90 | 0.92 | 0.95 | 0.95 | 0.98 | 1.02 |
|    | 1800         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.85 | 0.85 |
|    | 1500         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
|    | 1200         | 0.80          | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |

\* measured inside the inlet flange; with petroleum base fluid (visc. 10 to 65 cSt.).


Multiply the abs. pressure by 1.25 when using water-glycol or "water in oil emulsion", by 1.35 with synthetic fluids, and by 1.1 with ester or rapeseed base.

## Main operating data


**noise level** (model 50 + 38, with fluid 32 c.St., inlet viscosity 0.9 bar abs.)

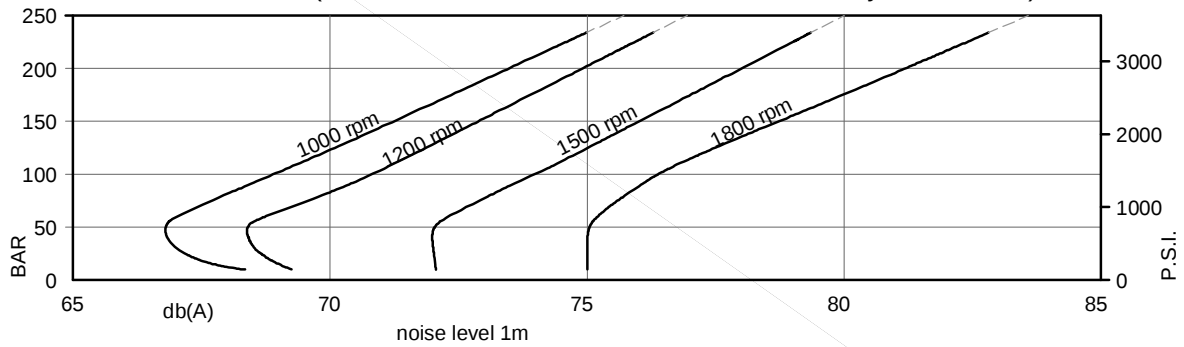


**allowable radial load** (max. permissible axial load = 200 daN)

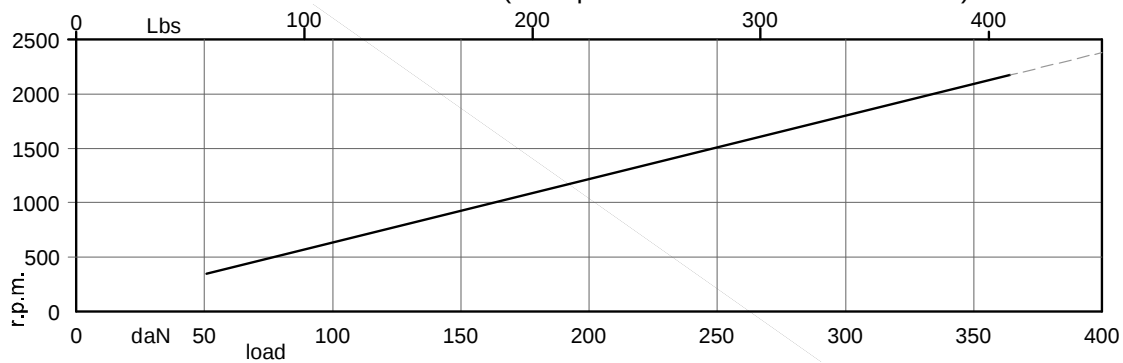

**power loss (typical)**

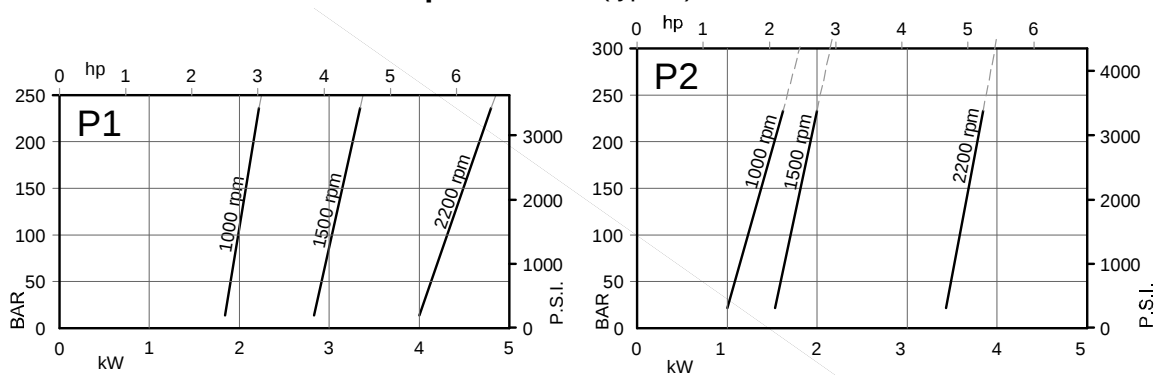

**Typical internal leakage \***  
(total leakage is the sum of each sector)

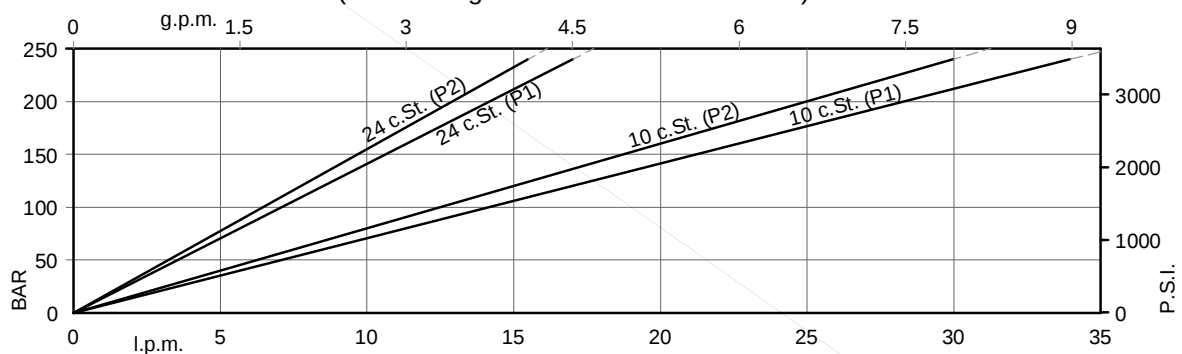

\* If the internal leakage is more than 50% of the theoretical flow, do not operate the pump

## Main operating data

### P1 section

Typical: 24 c.St. (115 SUS)

| Cartridge model | Geometric displacement |                      | Speed rpm | 140 bar |          | 240 bar |          | Input power (kW) |                    |                    |
|-----------------|------------------------|----------------------|-----------|---------|----------|---------|----------|------------------|--------------------|--------------------|
|                 | ml/rev.                | (in <sup>3</sup> /r) |           | l/min   | (gpm)    | l/min   | (gpm)    | 7 bar (100 psi)  | 140 bar (2000 psi) | 240 bar (3500 psi) |
| 45              | 142,4                  | (8.69)               | 1000      | 132,4   | (35.03)  | 125,3   | (33.15)  | 3.40             | 35.30              | 59.20              |
|                 |                        |                      | 1200      | 161,0   | (42.60)  | 154,0   | (40.75)  | 3.18             | 40.24              | 69.43              |
|                 |                        |                      | 1500      | 203,6   | (53.86)  | 196,5   | (51.98)  | 5.40             | 52.90              | 88.70              |
|                 |                        |                      | 1800      | 246,3   | (65.17)  | 239,3   | (63.32)  | 5.05             | 60.36              | 104.05             |
| 50              | 158,5                  | (9.67)               | 1000      | 148,5   | (39.29)  | 141,4   | (37.41)  | 3.50             | 39.00              | 65.60              |
|                 |                        |                      | 1200      | 180,3   | (47.70)  | 173,3   | (45.85)  | 3.40             | 44.62              | 77.10              |
|                 |                        |                      | 1500      | 227,7   | (60.24)  | 220,6   | (58.36)  | 5.70             | 58.50              | 98.30              |
|                 |                        |                      | 1800      | 275,3   | (72.83)  | 268,3   | (70.98)  | 5.38             | 66.93              | 115.55             |
| 52              | 164,8                  | (10.06)              | 1000      | 154,8   | (40.95)  | 147,7   | (39.07)  | 3.60             | 40.50              | 68.20              |
|                 |                        |                      | 1200      | 187,9   | (49.70)  | 180,9   | (47.85)  | 3.49             | 46.33              | 80.10              |
|                 |                        |                      | 1500      | 237,2   | (62.75)  | 230,1   | (60.87)  | 5.80             | 60.80              | 102.10             |
|                 |                        |                      | 1800      | 286,6   | (75.82)  | 279,6   | (73.97)  | 5.51             | 69.50              | 120.05             |
| 62              | 196,7                  | (12.00)              | 1000      | 186,7   | (49.39)  | 179,6   | (47.51)  | 4.00             | 47.90              | 80.90              |
|                 |                        |                      | 1200      | 226,1   | (59.81)  | 219,1   | (57.96)  | 3.93             | 55.01              | 95.28              |
|                 |                        |                      | 1500      | 285,0   | (75.40)  | 277,9   | (73.52)  | 6.40             | 71.90              | 121.30             |
|                 |                        |                      | 1800      | 343,9   | (90.99)  | 336,9   | (89.14)  | 6.16             | 82.51              | 142.83             |
| 66              | 213,3                  | (13.02)              | 1000      | 203,3   | (53.78)  | 196,2   | (51.90)  | 4.20             | 51.80              | 87.60              |
|                 |                        |                      | 1200      | 246,0   | (65.07)  | 239,0   | (63.22)  | 4.15             | 59.52              | 103.18             |
|                 |                        |                      | 1500      | 309,9   | (81.98)  | 302,8   | (80.11)  | 6.70             | 77.70              | 131.20             |
|                 |                        |                      | 1800      | 373,8   | (98.89)  | 366,8   | (97.04)  | 6.50             | 89.29              | 154.68             |
| 72              | 227,1                  | (13.86)              | 1000      | 217,1   | (57.43)  | 210,0   | (55.56)  | 4.30             | 55.00              | 93.10              |
|                 |                        |                      | 1200      | 262,5   | (69.45)  | 255,5   | (67.60)  | 4.34             | 63.27              | 109.75             |
|                 |                        |                      | 1500      | 330,6   | (87.46)  | 323,5   | (85.58)  | 6.90             | 82.60              | 139.50             |
|                 |                        |                      | 1800      | 398,6   | (105.45) | 391,6   | (103.60) | 6.78             | 94.92              | 164.54             |

## Main operating data

### P2 section


Typical: 24 c.St. (115 SUS)

| Cartridge model | Geometric displacement |                      | Speed rpm | 140 bar |         | 240 bar             |                       | Input power (kW) |                    |                     |
|-----------------|------------------------|----------------------|-----------|---------|---------|---------------------|-----------------------|------------------|--------------------|---------------------|
|                 | ml/rev.                | (in <sup>3</sup> /r) |           | l/min   | (gpm)   | l/min               | (gpm)                 | 7 bar (100 psi)  | 140 bar (2000 psi) | 240 bar (3500 psi)  |
| <b>14</b>       | 47,6                   | (2.90)               | 1000      | 38,3    | (10.13) | 32,1                | (8.49)                | 1.50             | 12.50              | 20.70               |
|                 |                        |                      | 1200      | 48,8    | (12.91) | 42,6                | (11.27)               | 1.80             | 14.43              | 24.44               |
|                 |                        |                      | 1500      | 62,1    | (16.43) | 55,9                | (14.79)               | 2.30             | 18.50              | 30.60               |
|                 |                        |                      | 1800      | 77,3    | (20.46) | 71,1                | (18.82)               | 2.96             | 21.57              | 36.31               |
| <b>20</b>       | 66,0                   | (4.03)               | 1000      | 56,7    | (15.00) | 50,5                | (13.36)               | 1.70             | 16.80              | 28.00               |
|                 |                        |                      | 1200      | 70,8    | (18.74) | 64,6                | (17.10)               | 2.05             | 19.44              | 33.20               |
|                 |                        |                      | 1500      | 89,7    | (23.73) | 83,5                | (22.09)               | 2.80             | 24.90              | 41.70               |
|                 |                        |                      | 1800      | 110,4   | (29.21) | 104,2               | (27.57)               | 3.33             | 29.09              | 49.47               |
| <b>24</b>       | 79,5                   | (4.85)               | 1000      | 70,2    | (18.57) | 64,0                | (16.93)               | 1.90             | 19.90              | 33.40               |
|                 |                        |                      | 1200      | 87,02   | (23.02) | 80,8                | (21.38)               | 2.23             | 23.11              | 39.63               |
|                 |                        |                      | 1500      | 110,0   | (29.10) | 103,8               | (27.46)               | 3.00             | 29.60              | 49.80               |
|                 |                        |                      | 1800      | 134,7   | (35.63) | 128,5               | (33.99)               | 3.61             | 34.61              | 59.12               |
| <b>28</b>       | 89,7                   | (5.47)               | 1000      | 80,4    | (21.27) | 74,2                | (19.63)               | 2.00             | 22.30              | 37.50               |
|                 |                        |                      | 1200      | 99,3    | (26.26) | 93,1                | (24.62)               | 2.37             | 25.89              | 44.49               |
|                 |                        |                      | 1500      | 125,2   | (33.12) | 119,0               | (31.48)               | 3.20             | 33.20              | 55.90               |
|                 |                        |                      | 1800      | 153,0   | (40.48) | 146,1               | (38.64)               | 3.82             | 38.77              | 66.41               |
| <b>31</b>       | 98,3                   | (6.00)               | 1000      | 89,0    | (23.54) | 82,8                | (21.90)               | 2.10             | 24.30              | 40.90               |
|                 |                        |                      | 1200      | 109,6   | (28.99) | 103,4               | (27.35)               | 2.49             | 28.23              | 48.59               |
|                 |                        |                      | 1500      | 138,1   | (36.53) | 131,9               | (34.89)               | 3.30             | 36.20              | 61.00               |
|                 |                        |                      | 1800      | 168,5   | (44.57) | 162,3               | (42.93)               | 4.00             | 42.28              | 72.55               |
| <b>35</b>       | 111,0                  | (6.77)               | 1000      | 101,7   | (26.90) | 95,5                | (25.26)               | 2.30             | 27.30              | 46.00               |
|                 |                        |                      | 1200      | 124,8   | (33.01) | 118,6               | (31.37)               | 2.66             | 31.68              | 54.64               |
|                 |                        |                      | 1500      | 157,2   | (41.59) | 151,0               | (39.95)               | 3.50             | 40.70              | 68.70               |
|                 |                        |                      | 1800      | 191,3   | (50.61) | 185,1               | (48.97)               | 4.25             | 47.47              | 81.63               |
| <b>38</b>       | 120,3                  | (7.34)               | 1000      | 111,0   | (29.37) | 104,8               | (27.72)               | 2.40             | 29.40              | 49.80               |
|                 |                        |                      | 1200      | 135,9   | (35.96) | 129,7               | (34.32)               | 2.79             | 36.42              | 59.07               |
|                 |                        |                      | 1500      | 171,1   | (45.26) | 164,9               | (43.62)               | 3.70             | 43.90              | 74.30               |
|                 |                        |                      | 1800      | 208,0   | (55.03) | 201,8               | (53.39)               | 4.45             | 51.27              | 88.28               |
| <b>42</b>       | 136,0                  | (8.30)               | 1000      | 126,7   | (33.52) | 120,5               | (31.88)               | 2.60             | 33.10              | 56.00               |
|                 |                        |                      | 1200      | 154,7   | (40.94) | 148,6               | (39.30)               | 3.00             | 38.49              | 66.56               |
|                 |                        |                      | 1500      | 194,7   | (51.51) | 188,5               | (49.87)               | 4.00             | 49.40              | 83.70               |
|                 |                        |                      | 1800      | 236,3   | (62.50) | 230,1               | (60.86)               | 4.76             | 57.68              | 99.50               |
| <b>45</b>       | 145,7                  | (8.89)               | 1000      | 136,4   | (36.08) | 130,2               | (34.44)               | 2.70             | 35.30              | 59.90               |
|                 |                        |                      | 1200      | 166,4   | (44.01) | 160,2               | (42.37)               | 3.14             | 41.14              | 71.18               |
|                 |                        |                      | 1500      | 209,2   | (55.34) | 203,0               | (53.70)               | 4.10             | 52.80              | 89.50               |
|                 |                        |                      | 1800      | 253,7   | (67.11) | 247,5               | (65.47)               | 4.96             | 61.64              | 106.43              |
| <b>50</b>       | 158,0                  | (9.64)               | 1000      | 148,7   | (39.34) | 145,0 <sup>1)</sup> | (38.36) <sup>1)</sup> | 2.80             | 38.20              | 56.80 <sup>1)</sup> |
|                 |                        |                      | 1200      | 181,1   | (47.91) | 176,6 <sup>1)</sup> | (46.73) <sup>1)</sup> | 3.30             | 44.48              | 66.19 <sup>1)</sup> |
|                 |                        |                      | 1500      | 227,7   | (59.24) | 224,0 <sup>1)</sup> | (59.26) <sup>1)</sup> | 4.40             | 57.00              | 85.00 <sup>1)</sup> |
|                 |                        |                      | 1800      | 275,8   | (72.96) | 271,3 <sup>1)</sup> | (71.78) <sup>1)</sup> | 5.21             | 66.67              | 99.02 <sup>1)</sup> |

1) 210 bar (3000p.s.i.) max. int.

## Installation dimensions


mm [inches]

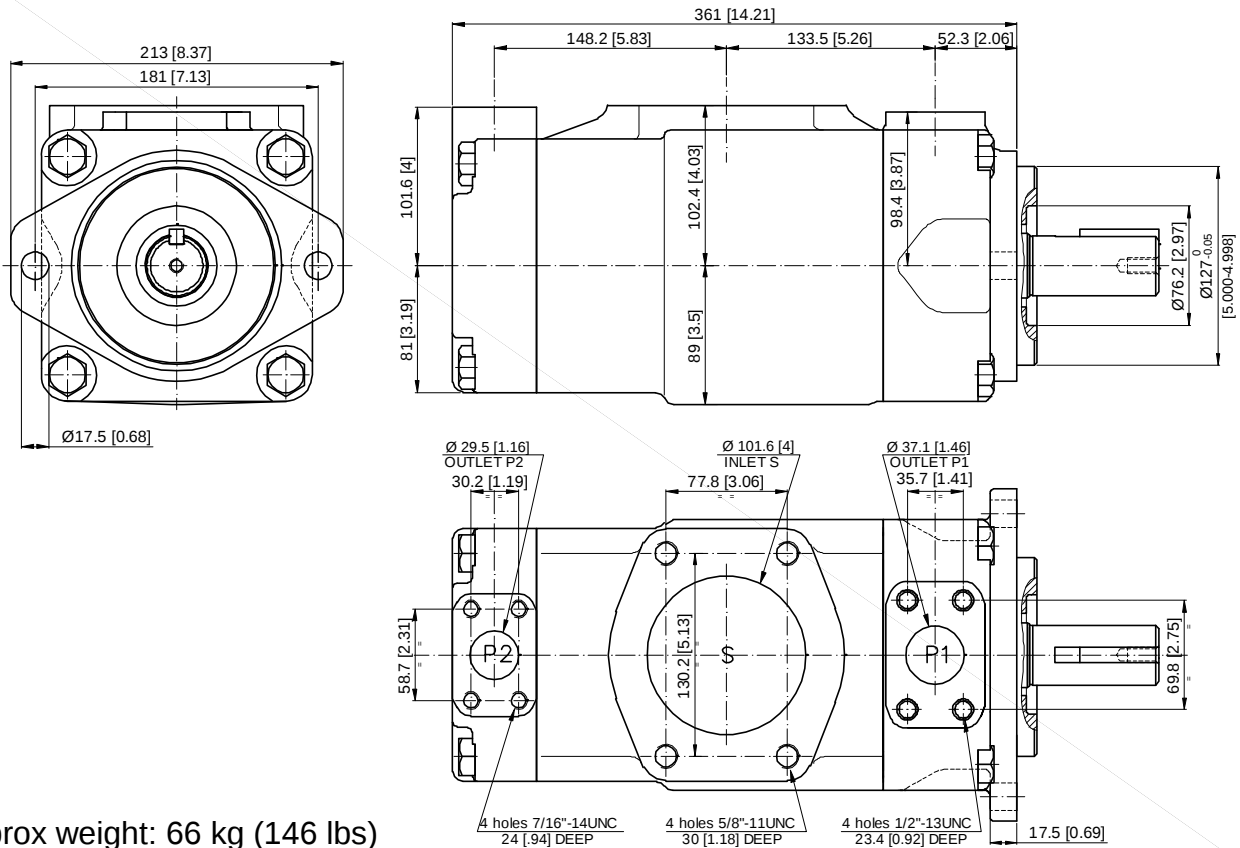

Approx weight: 66 kg (146 lbs)

## Shaft options

mm [inches]

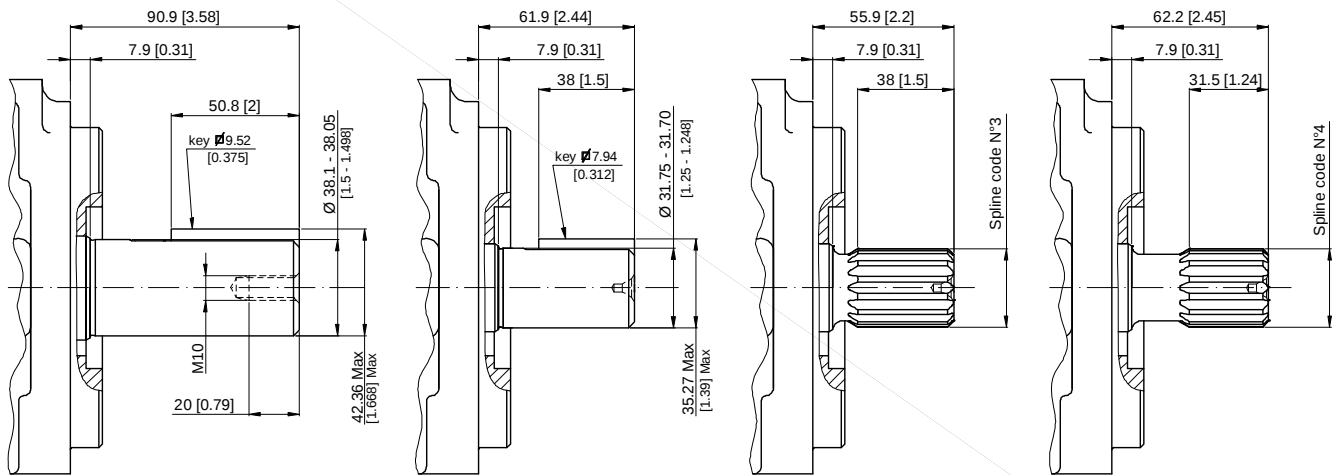

Shaft No.1

Shaft No.2

Shaft No.3

Shaft No.4


### Calculation of the max permitted torque: (avoid to exceed)

| Shaft No. | (ml/rev) x bar<br>P1+P2 | (in3/rev) x psi<br>P1+P2 |
|-----------|-------------------------|--------------------------|
| 1         | 72306                   | 64044                    |
| 2         | 34590                   | 30638                    |
| 3         | 61200                   | 54207                    |
| 4         | 76376                   | 67582                    |



### Spline code

|                | 3                  | 4                  |
|----------------|--------------------|--------------------|
| Designation    | Sae C              | No Sae             |
| Pressure angle | 30°                | 30°                |
| No. of teeth   | 14                 | 17                 |
| Pitch          | 12/24 d.p.         | 12/24 d.p.         |
| Spline type    | flat root side fit | flat root side fit |
| Class          | 1- J498 b          | 1- J498 b          |

## Model code breakdown

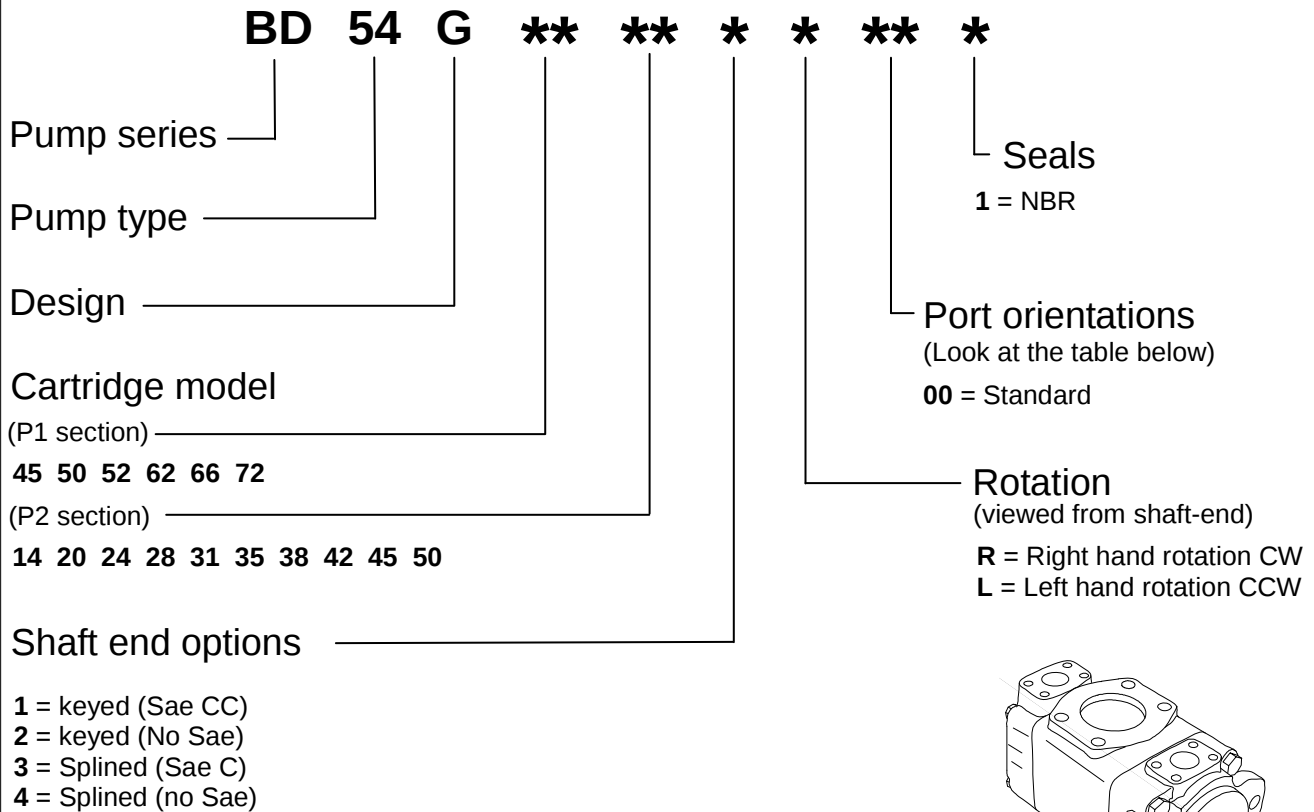

Port orientations

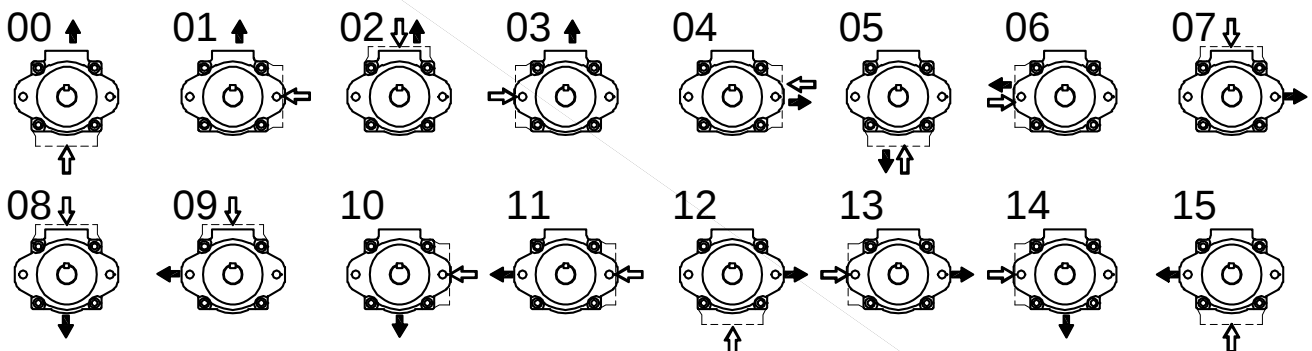

## Id. codes of pump components

| Rear cartridge |          |                      |
|----------------|----------|----------------------|
| Type           | Model    | Pump rotation        |
|                |          | Right hand Left hand |
| BD54           | 14       | N0600150             |
|                | 20       | N0600190             |
|                | 24       | N0600210             |
|                | 28       | N0600230             |
|                | 31       | N0600250             |
|                | 35       | N0600270             |
|                | 38       | N0600290             |
|                | 42       | N0600310             |
|                | 45       | N0600330             |
|                | 50       | N0600350             |
| BD54           | N0600160 |                      |
|                | N0600200 |                      |
|                | N0600220 |                      |
|                | N0600240 |                      |
|                | N0600260 |                      |
|                | N0600280 |                      |
|                | N0600300 |                      |
|                | N0600320 |                      |
|                | N0600340 |                      |
|                | N0600360 |                      |

| Front cartridge |       |                      |
|-----------------|-------|----------------------|
| Type            | Model | Pump rotation        |
|                 |       | Right hand Left hand |
| BD54            | 45    | N0600030             |
|                 | 50    | N0600050             |
|                 | 52    | N0600070             |
|                 | 62    | N0600090             |
|                 | 66    | N0600110             |
|                 | 72    | N0600130             |
|                 |       | N0600040             |
|                 |       | N0600060             |
|                 |       | N0600080             |
|                 |       | N0600100             |
|                 |       | N0600120             |
|                 |       | N0600140             |


| Shaft |          |
|-------|----------|
| Model | Part No. |
| 01    | K6521000 |
| 02    | K6522000 |
| 03    | K6523000 |
| 04    | K6524000 |

| Screw                          |          |
|--------------------------------|----------|
| Part No.                       | M3050130 |
| Torque at 187 Nm (1668 lb.in.) |          |

| Shaft seal |          |
|------------|----------|
| Part No.   | M3050060 |
| type       | NBR      |

| Screw                          |          |
|--------------------------------|----------|
| Part No.                       | M3040130 |
| Torque at 187 Nm (1668 lb.in.) |          |

| Pump seal kit |          |
|---------------|----------|
| Part No.      | M3054500 |
| Type          | NBR      |

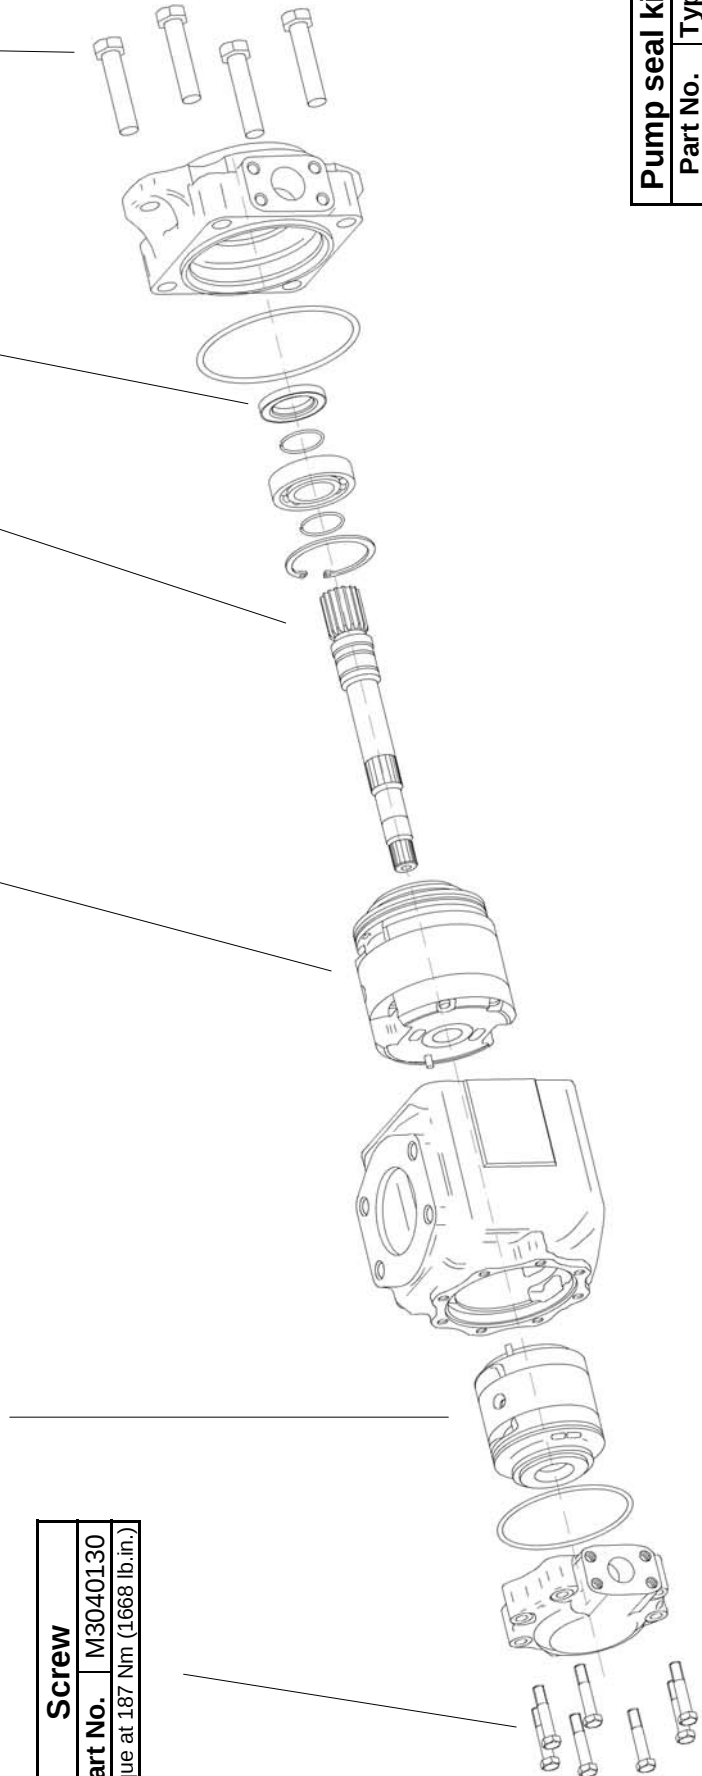

## Operating instructions

**Maximum speed:** the maximum speeds given in this catalogue are valid for an atmospheric pressure of 1 bar (14.7psi), fluid viscosity between 10 to 65 cSt., and ambient temperature in the range of +30°C to +50°C. Sustained excess speed causes a rapid deterioration of the internal components reducing the lifetime of the cartridge.

**Minimum speed:** In general, the min. speed for all pumps is 400 rpm. However, it is possible to operate at lower speeds with certain pump configurations and with appropriate operating temperatures.

**Inlet pressure:** the inlet pressure, measured at the inlet port, should remain within the prescribed limits. Note that pressures lower than minimum limit cause cavitation and pressures above the maximum limit cause abnormal loads on the shaft and the bearings. In both cases this causes a significant reduction in the lifetime of the cartridge.

**Maximum outlet pressure:** the maximum continuous outlet pressure is different for each type of fluid used as can be seen from the corresponding diagrams. If fluid viscosity, pump speed and contamination level are respected, an intermittent pressure of +15% is permissible for a maximum time of 80% of the duty cycle lasting 15 minutes. For longer duty cycles, please consult our technical office.

**Mounting and drive connections:** consider the following indications when preparing the installation drawings:

*Pump with keyed shaft:* the pump with keyed shaft has to be coupled axially and by means of a flexible coupling to the drive; the clearance between the keyed shaft and the corresponding sleeve coupling has to be between 0.004 and 0.030 mm; avoid axial and radial loads on the shaft; the mounting flange has to be perpendicular to the drive shaft, with a maximum error of 0.18 mm every 100 mm.

*Pump with splined shaft:* the female spline must be hardened (30 to 45 R.C.) and should be free to float to find its own center; the clearance between splines has to be between 0.013 and 0.051 mm on the pitch diameter; the max angular misalignment between the two spline axes must be less than  $\pm 0.05$  per 25 mm radius. The coupling spline must be lubricated with grease or similar lubricant.

**Hydraulic circuit:** always install a pressure relief valve on the supply line to prevent the pressure from exceeding the allowed maximum. Normally, it is set in accordance with the weakest component in the system. (In the case where it is the pump, set the valve to a pressure 15% higher than the maximum pressure rating of the pump.) Inlet line tubing must have the sections that permits a fluid velocity between 0.5 and 1.9 m/sec. It is advisable to keep the tube connecting the pump to the reservoir as short possible. Particular care has to be taken with the inlet line which must be hermetically sealed to avoid entraining air into the circuit; this varies the characteristics of the hydraulic fluid causing the operating parts to become damaged.

**Filtration:** the inlet line filter must have a flow rate capacity that is higher than that of the pump at its maximum operating speed. The use of a filter by-pass is recommended for cold starts and should avoid the filter become clogged. Proper maintenance of the filter elements are essential for the correct operation of the entire system. In normal conditions replace the filter element after the first 50 hours of operation. Subsequently, replace it at least every 500 hours. Regarding the filter on the return line, apply the same general conditions as for the inlet line and it should be positioned in an accessible location for ease of maintenance.

**Tank:** if possible, the reservoir should be positioned above the pump. Otherwise, ensure that the minimum level of the fluid contained in it is higher than the pump inlet line opening. It is important to avoid draining the inlet line with the pump at standstill. The opening of the return line into the reservoir must remain below the minimum level of the fluid in the reservoir. It must not be positioned too close to the opening of the inlet line to avoid the possibility of any air bubbles passing into the inlet line. Baffles inside the reservoir may be useful in avoiding the problem. Rapid temperature changes can cause condensation on the underside of the lid of the reservoir with the formation of droplets of water that can fall into the oil. To avoid this problem it is recommended that the lid should have small vents so that the air space in the reservoir is ventilated. The vents have to be screened, though, to prevent the entry of dust or the sudden expulsion of fluid.

**Start-up:** use the following procedure when the pump is started-up for the first time: completely fill the pump and the inlet line with fluid; start the motor at lower speed for approximately one second a number of times at regular intervals of approximately 2 or 3 seconds until the noise level reduces, thereby confirming that it has been primed; with a manometer check to ensure that the outlet pressure increases slightly; once the pump has been primed, maintain low pressure levels activating all parts of the circuit a number of times until air bubbles disappear completely from the return line to the reservoir. This procedure should be carefully applied because any residual air inside the pump can quickly cause the rotor to seize. After long stops (>1 week) the start up procedure must be repeated.

**Cold starting:** when starting the pump, especially with low ambient temperatures, operate with moderate speed and pressure until the average temperature in the entire circuit is within the given limits. Make sure the fluid viscosity is within the limits, by consulting the specific pump model in this catalogue.

**Vertical installation:** The pump cannot work in vertical position (vertical shaft), unless the hydraulic circuit is equipped by devices to fill the pump completely before each starting.

The information provided in this catalogue is subject to change without notice



**B & C s.r.l.**

41122 Modena (Italy) - Via Somalia, 20/22

tel.+39 059450666—fax +39 059450686

[www.bcit.it](http://www.bcit.it) - [info@bcit.it](mailto:info@bcit.it)