

Hand pumps

PM 12-25 byB-AISI-316

Tech sheet



DETAILS

with release hand knob
with pressure relief valve
double acting hand pump for single acting cylinder
for fixing to tank



SPECIFICATIONS

Stainless steel AISI 316 pump body
Stainless steel AISI 630 piston rod
with Niploy coating (50 µm)
Lever connection Ø 27
Stainless steel AISI 316 external parts
Oil tank mounting kit including
Pressure relief valve standard
setting: 100 bar
Equipped with non return valve on the
outlet port
Triple sealing system made to prevent
any oil leakage and sweating onto the piston rod

HYDRAULIC DIAGRAM

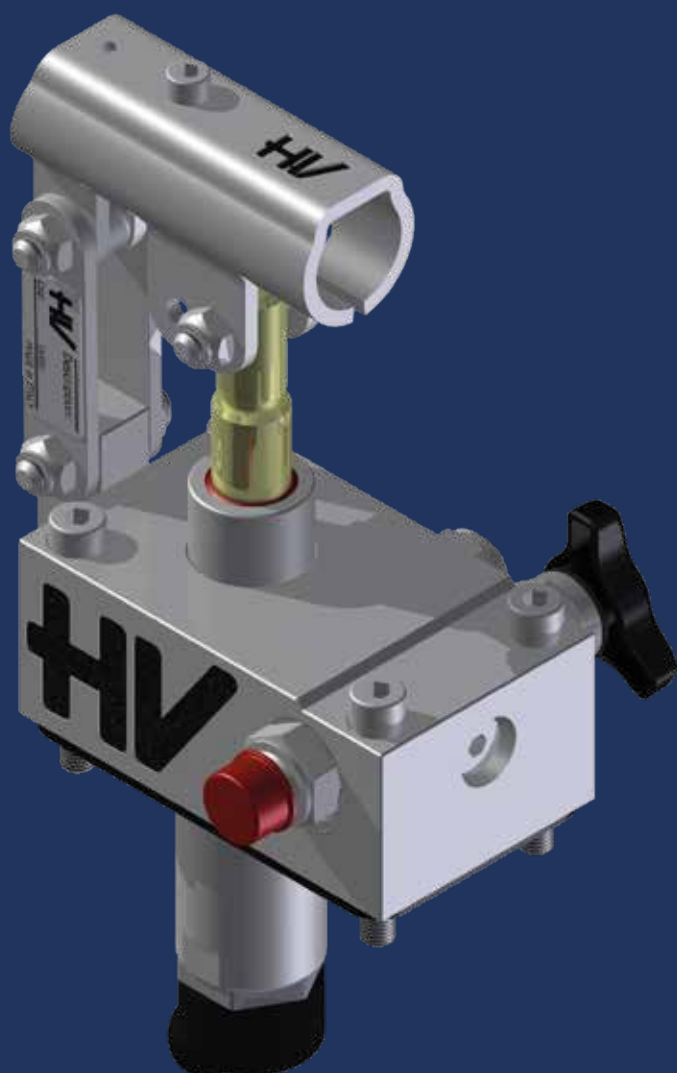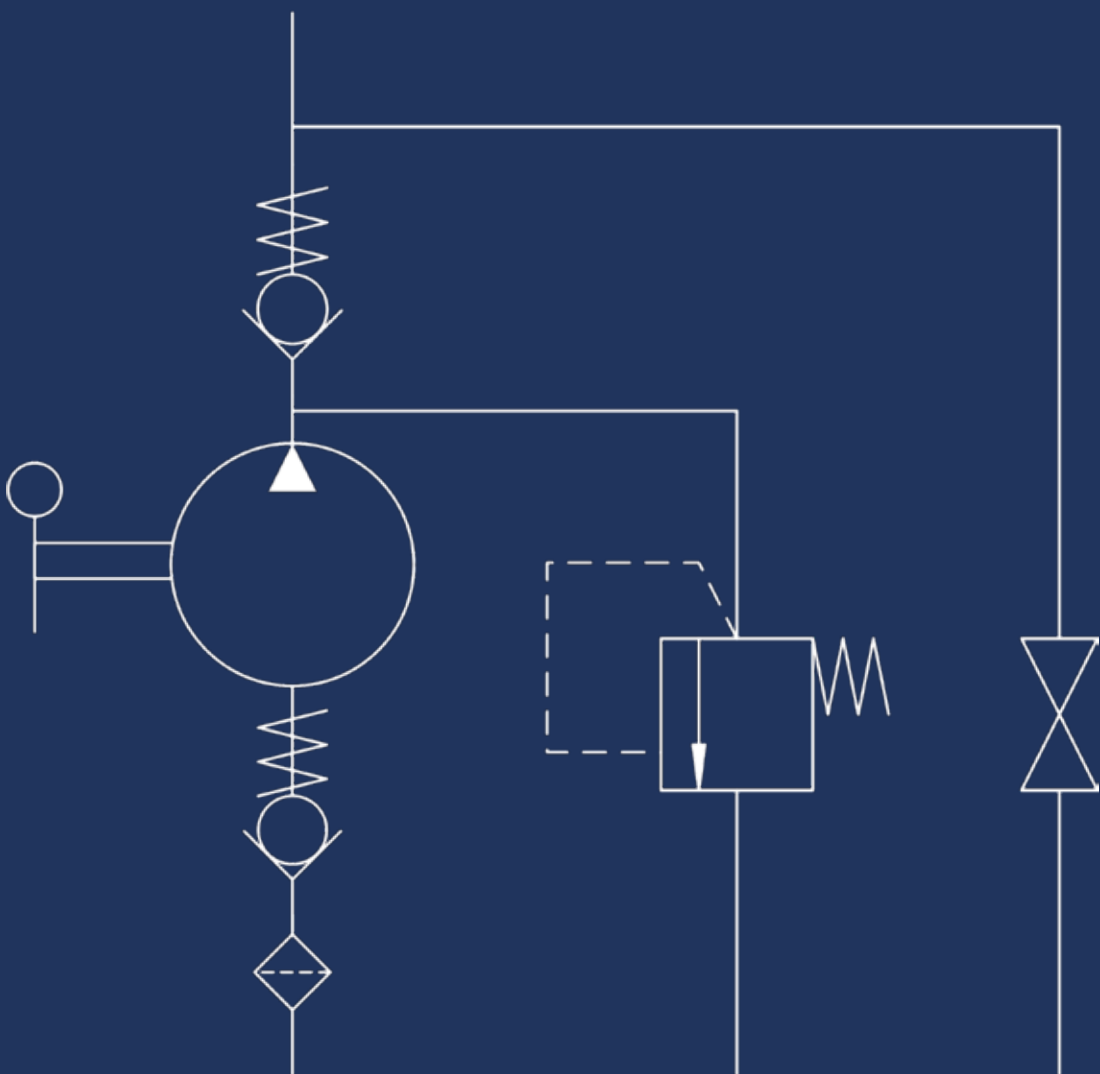

EFFORT DIAGRAM

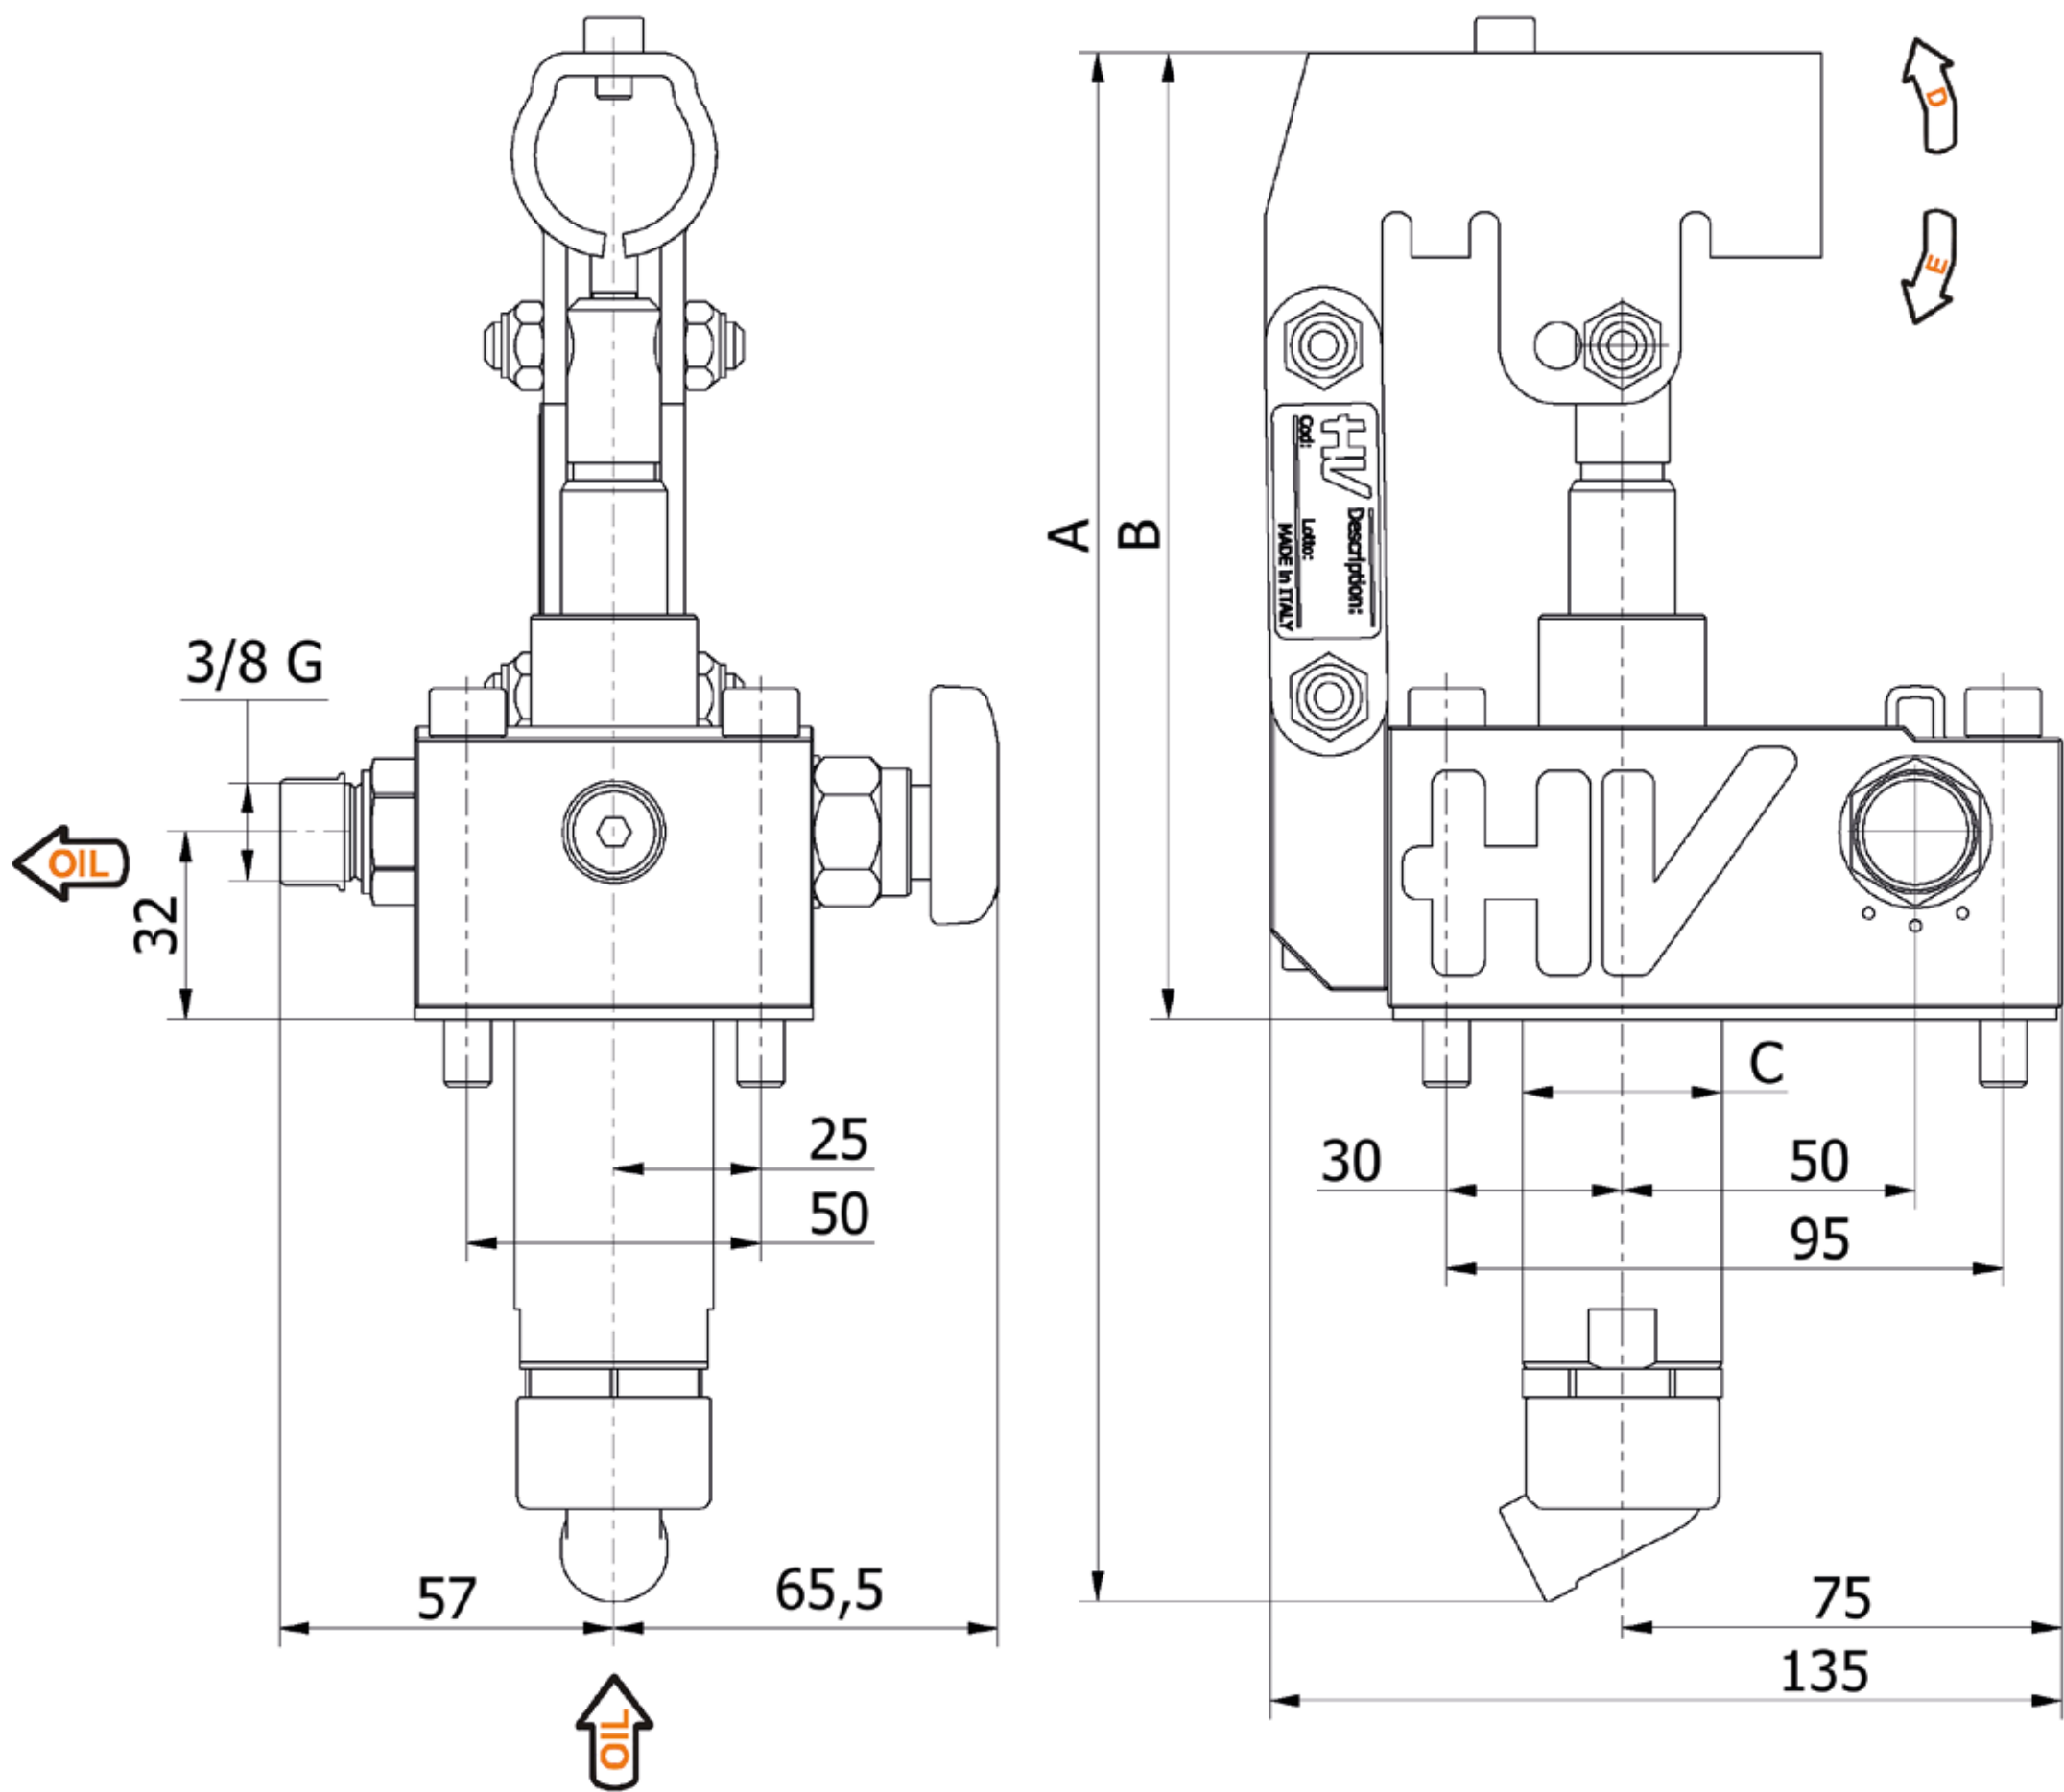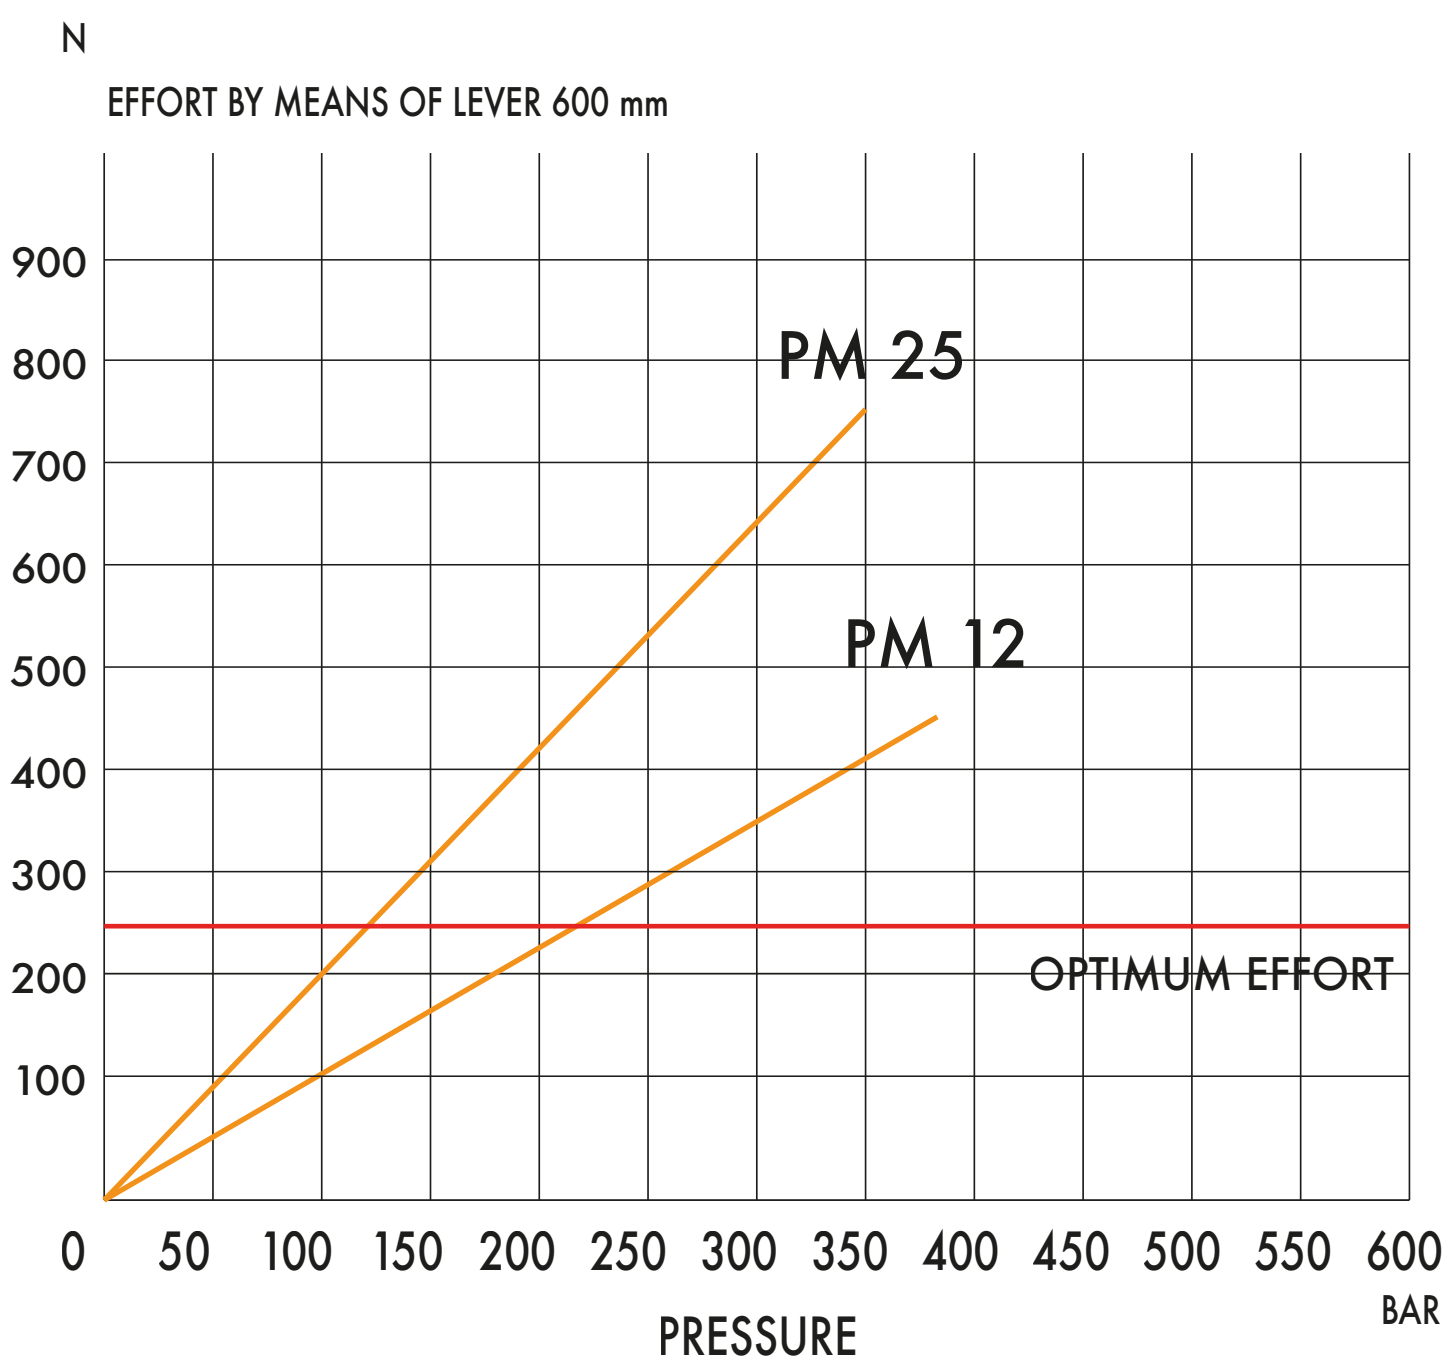

DISPLACEMENT cm³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
12	253	166	34	26	31	12,095	220	380	4,200	6050.7000
25	273	172	34	30	30	25,280	120	350	4,200	6051.7000