

Hand pumps

PMDVB 6-12-25-45 cc-s

Tech sheet


DETAILS

with 4/3 diverter closed centre
 with dual pilot check valve
 with brakes
 double acting hand pump for a double acting cylinder
 for fixing to tank



SPECIFICATIONS

Cast iron body
 Piston treated with Niploy
 White zinc plated support lever
 Lever connection Ø 27
 White zinc plated external parts
 Standard colour black
 Oil tank mounting kit included
 With hydraulic brakes to operate under 50 bar pressure

HYDRAULIC DIAGRAM

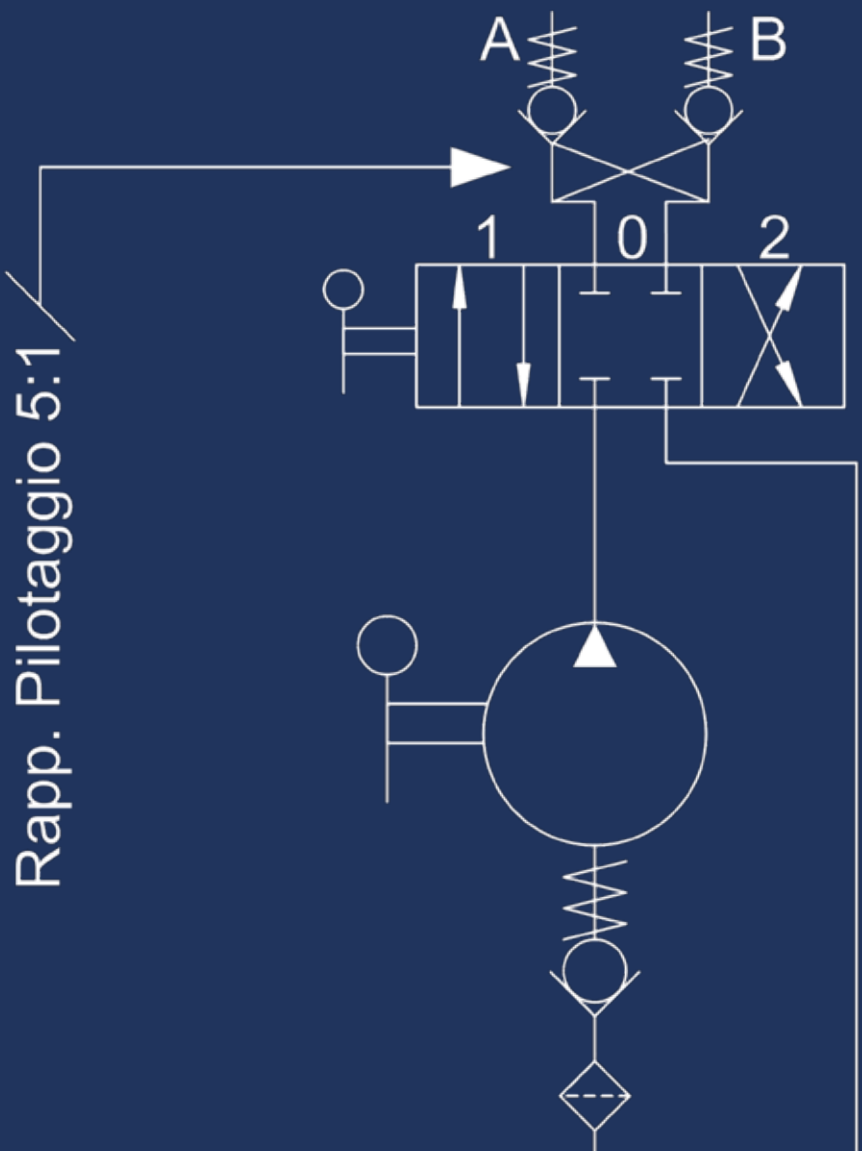

EFFORT DIAGRAM

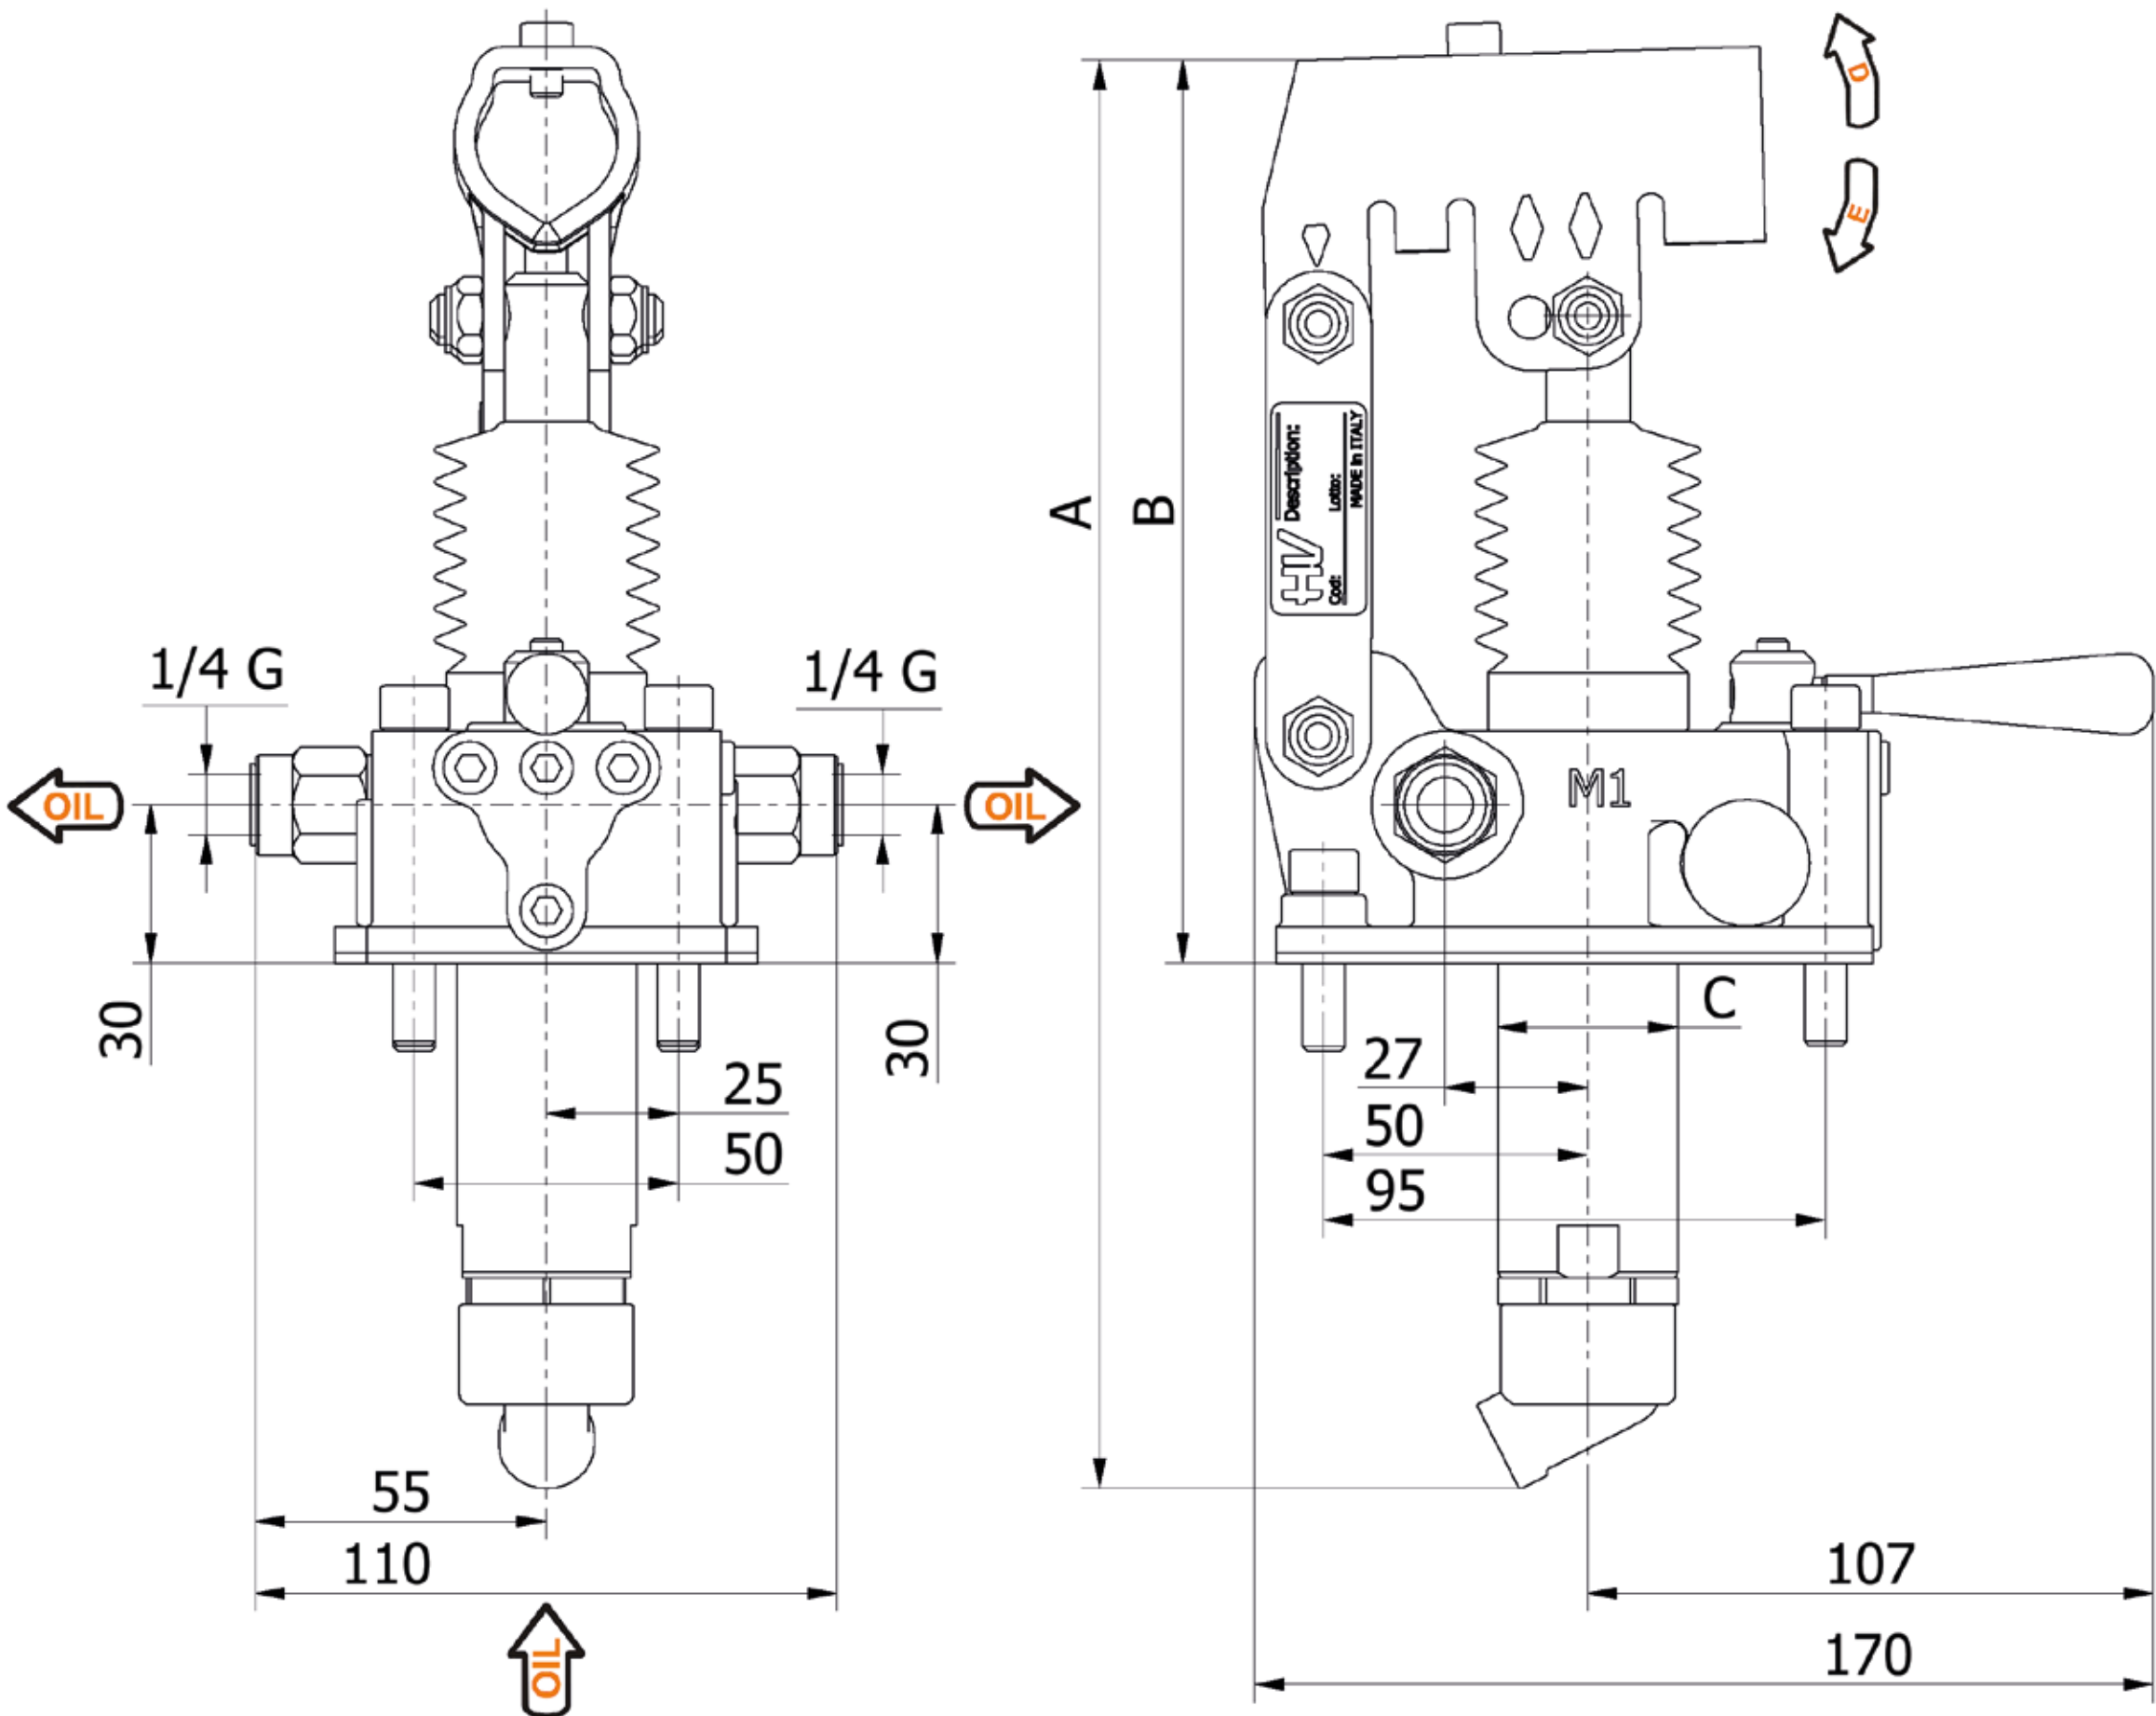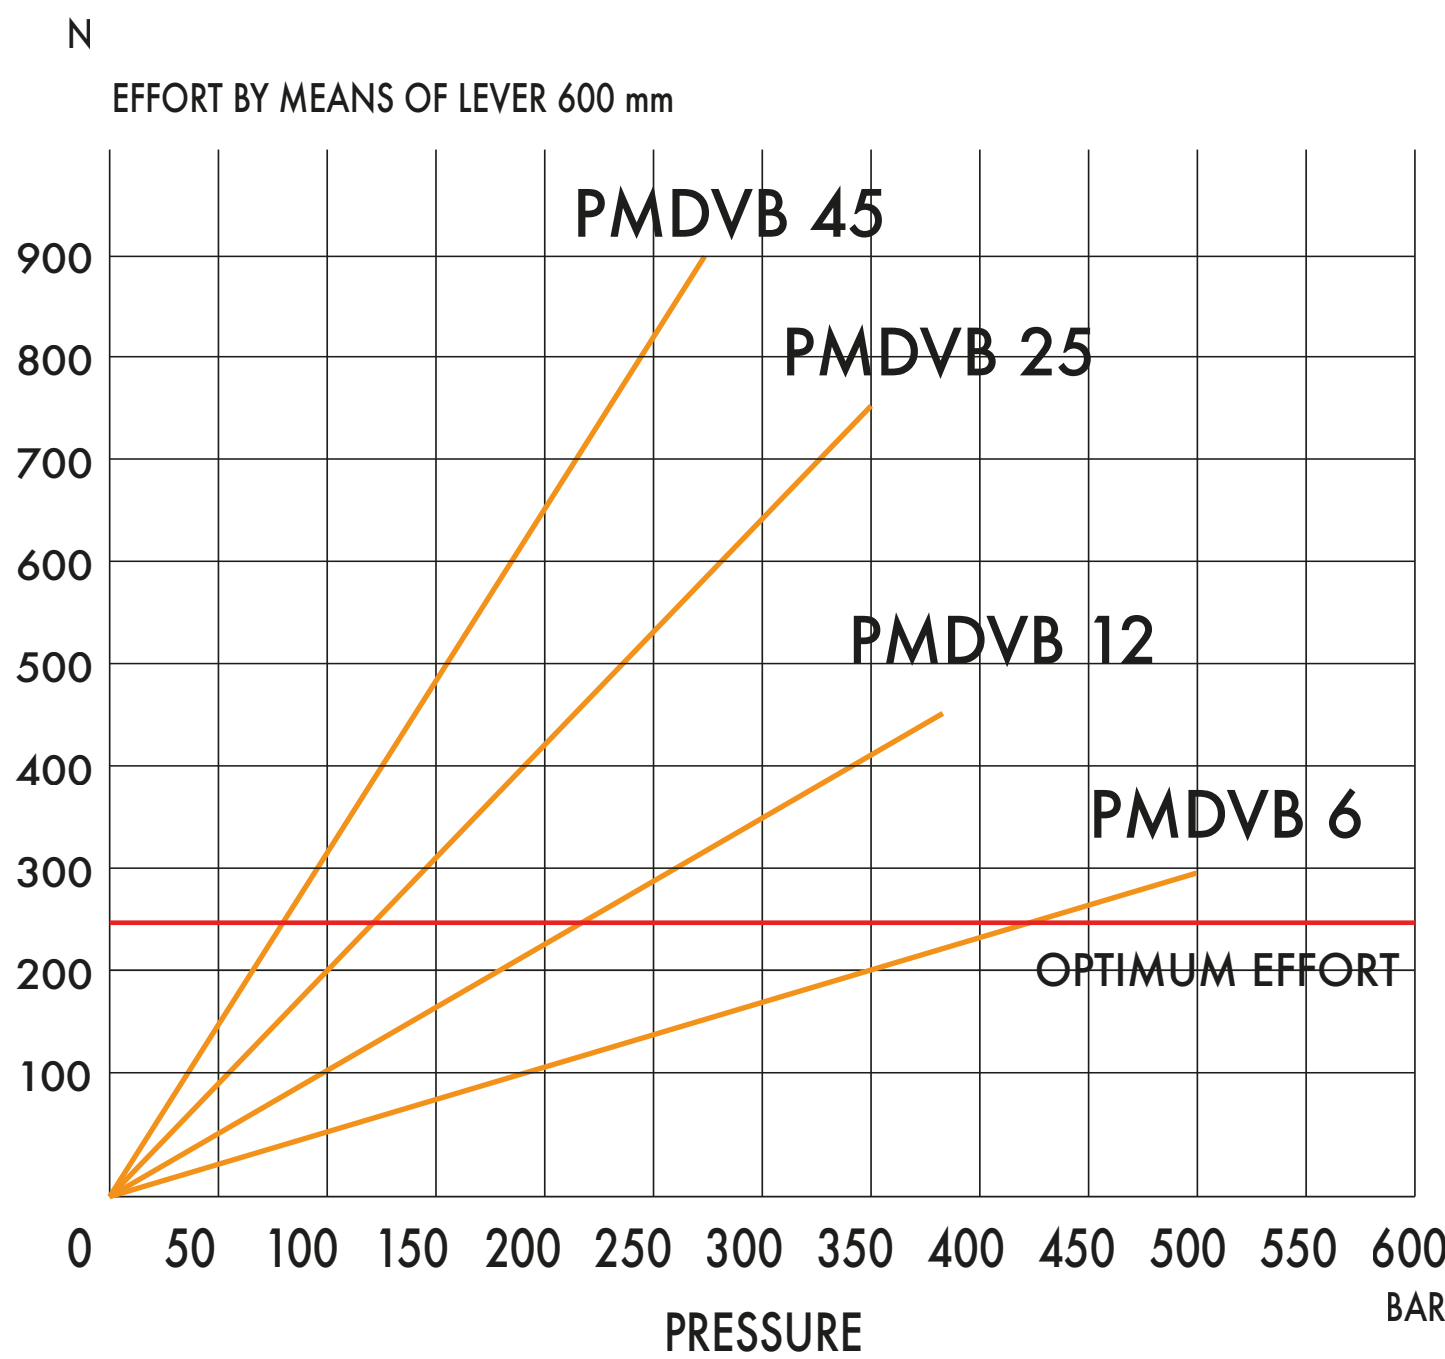

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
6	253	166	34	26	31	6,970	420	500	3,400	6059.0101
12	253	166	34	26	31	12,095	220	380	3,400	6060.0101
25	273	172	34	30	30	25,280	120	350	3,450	6061.0101
45	283	172	40	45	33	44,532	80	280	3,500	6062.0101

Hand pumps

PMDVB 6-12-25-45 cc-byB-s

Tech sheet


DETAILS

- with 4/3 diverter closed centre
- with dual pilot check valve
- with brakes - with pressure relief valve double acting
- hand pump for a double acting cylinder for fixing to tank



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included
With hydraulic brakes to operate
under 50 bar pressure
Pressure relief valve standard
setting: 100 bar

HYDRAULIC DIAGRAM

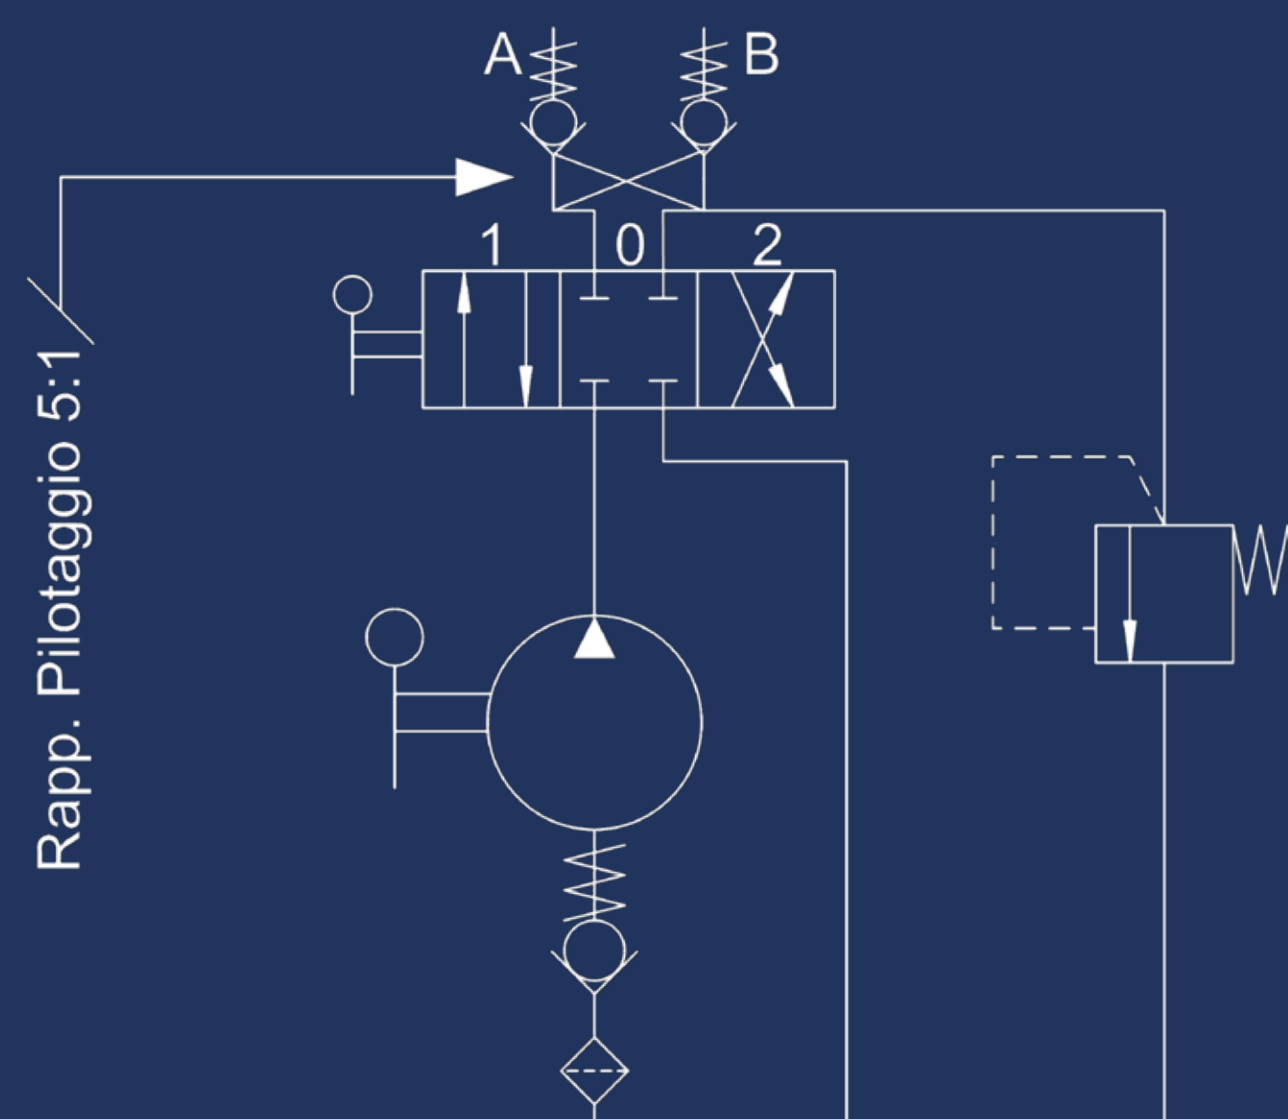

EFFORT DIAGRAM

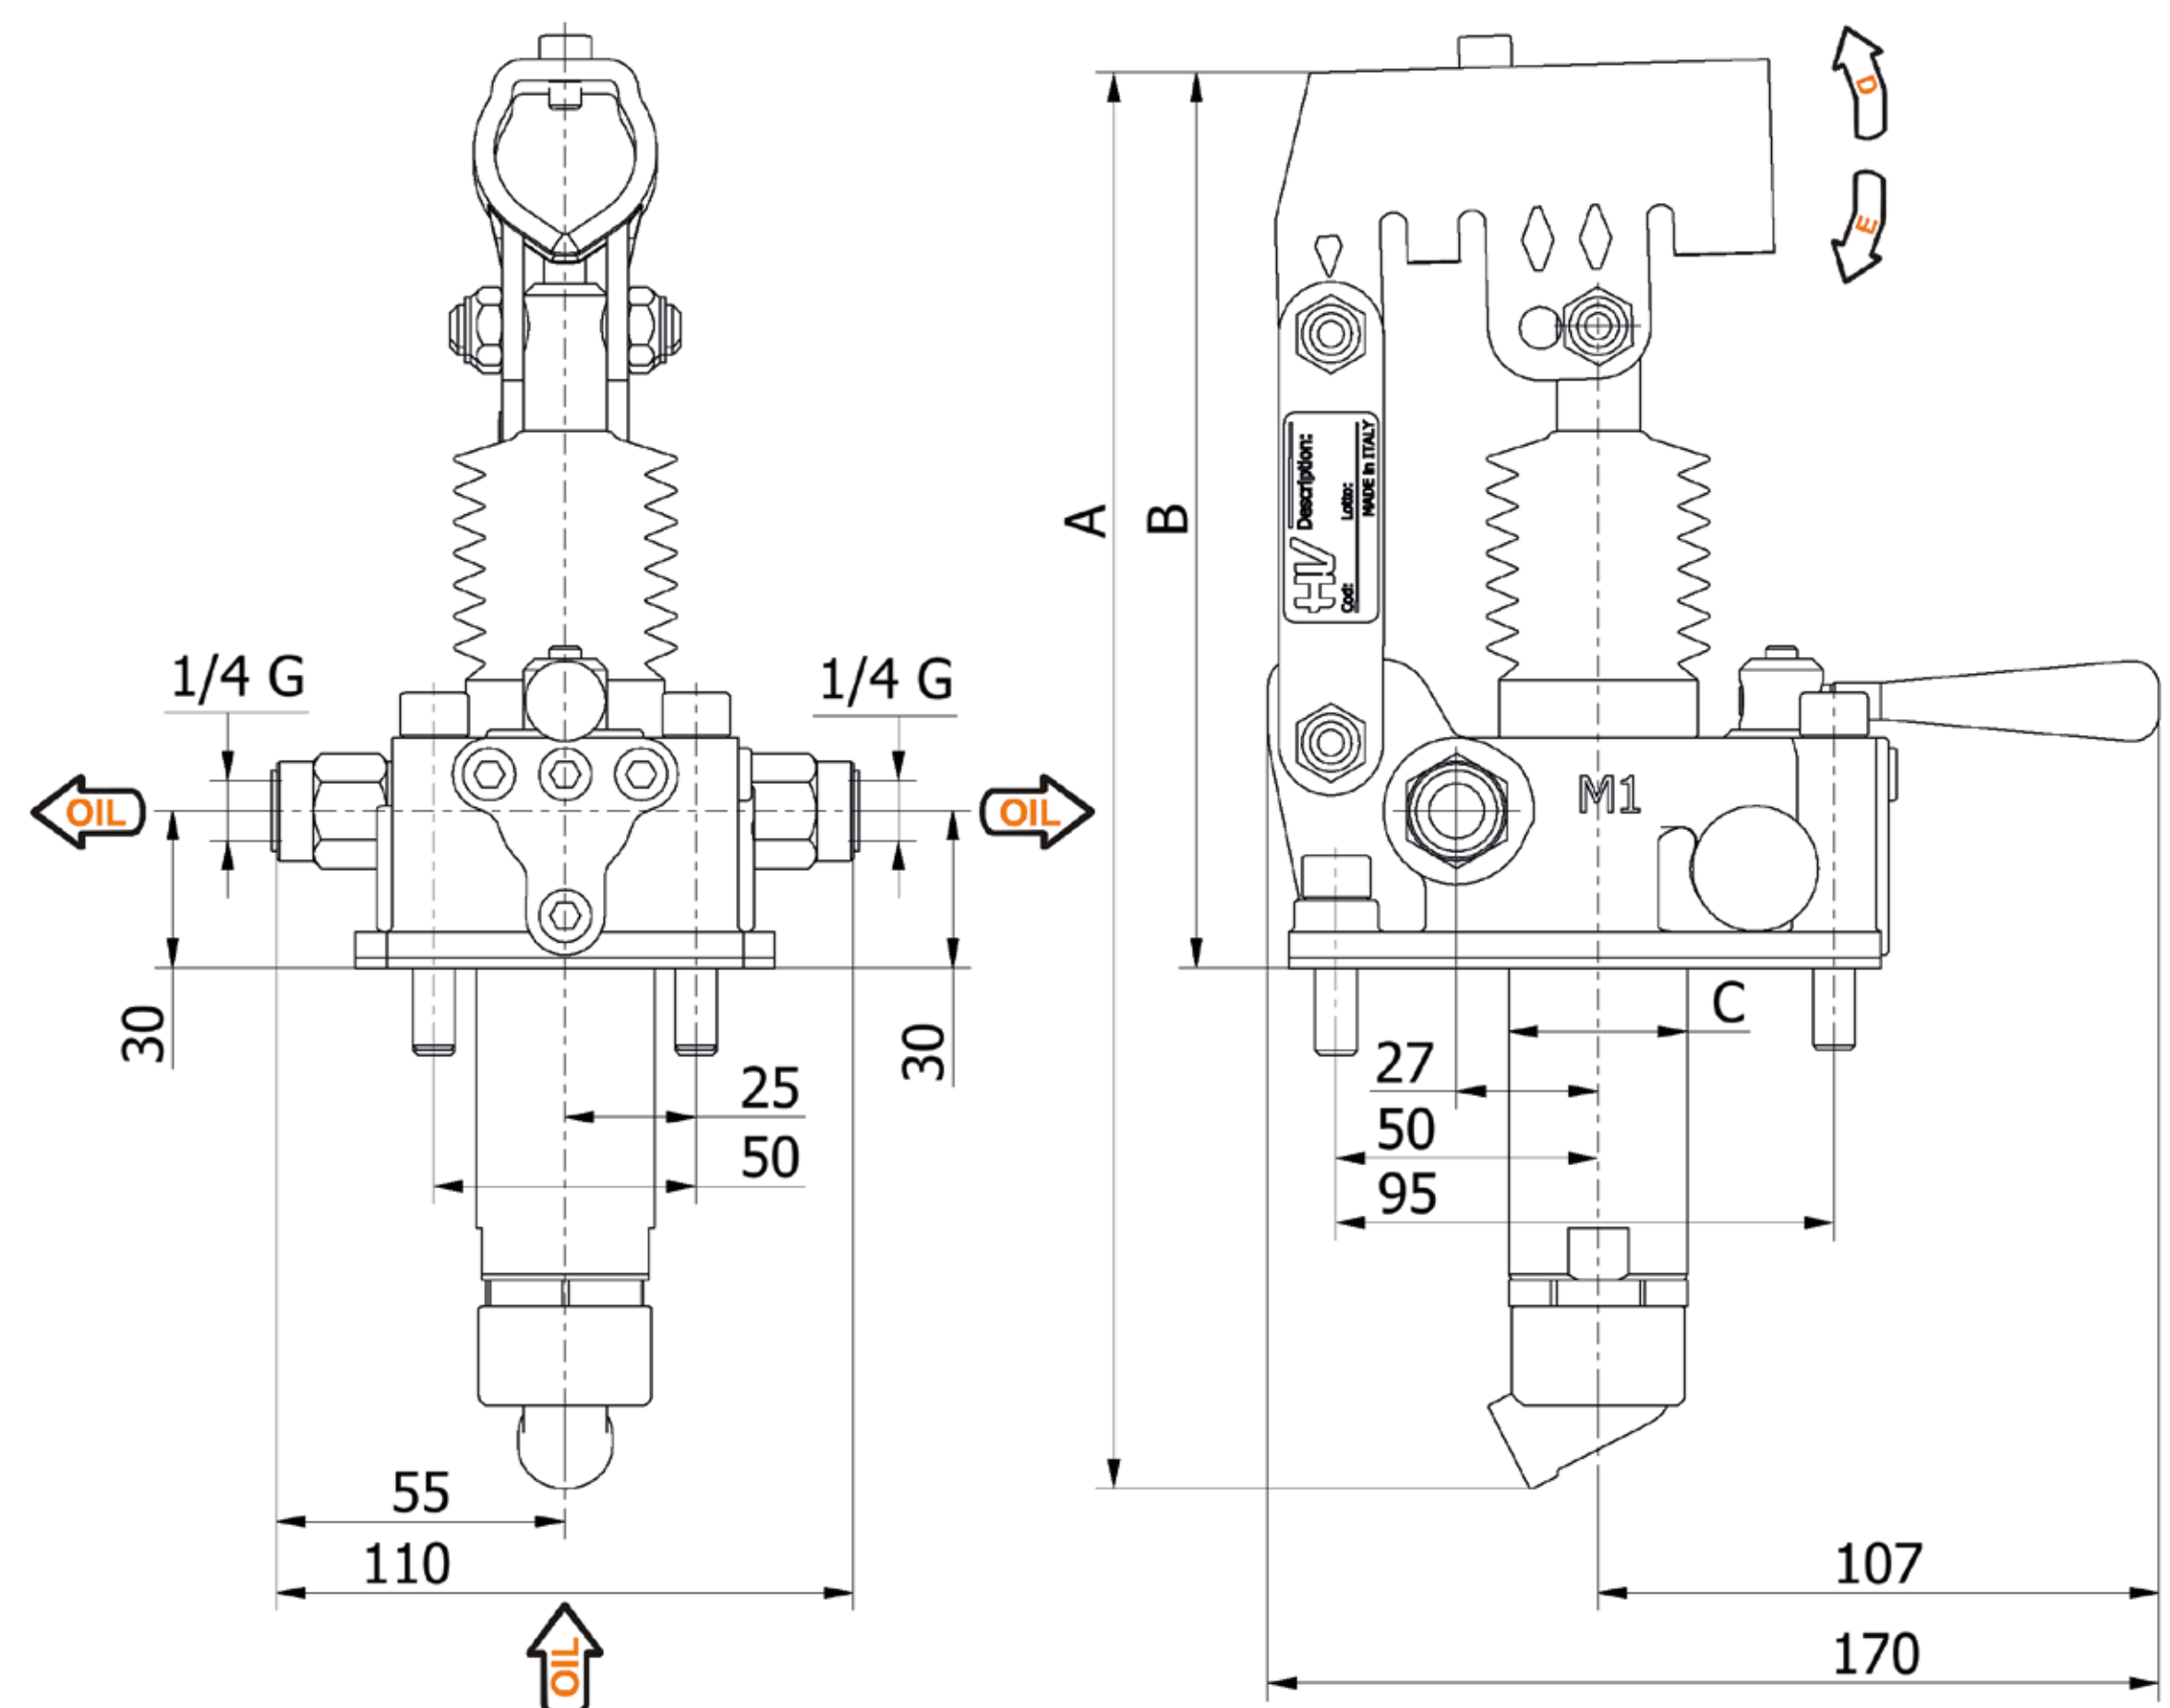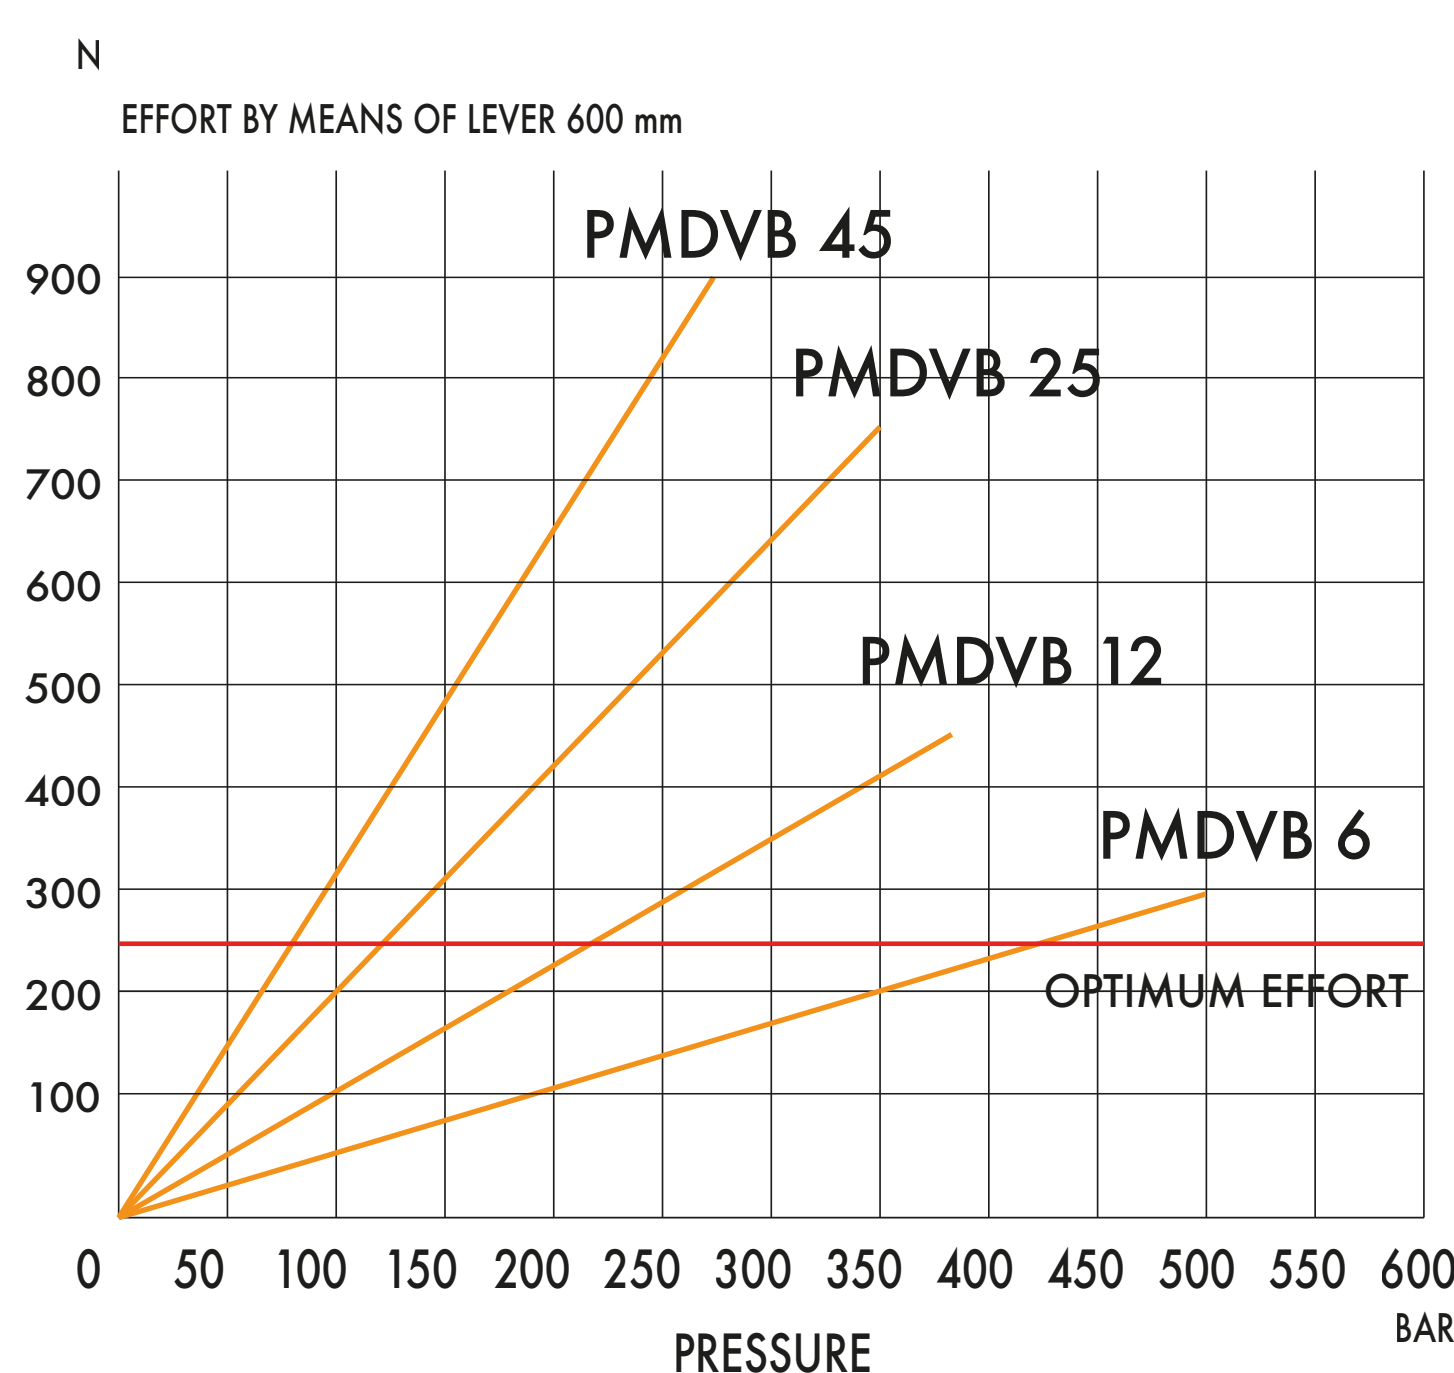[illegible]

Hand pumps

PMDVB 6-12-25-45 cc-byAB-s

Tech sheet


DETAILS

- with 4/3 diverter closed centre
- with dual pilot check valve
- with brakes - with pressure relief valve double acting
- hand pump for a double acting cylinder for fixing to tank



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included
With hydraulic brakes to operate
under 50 bar pressure
Pressure relief valve standard
setting: 100 barr

HYDRAULIC DIAGRAM

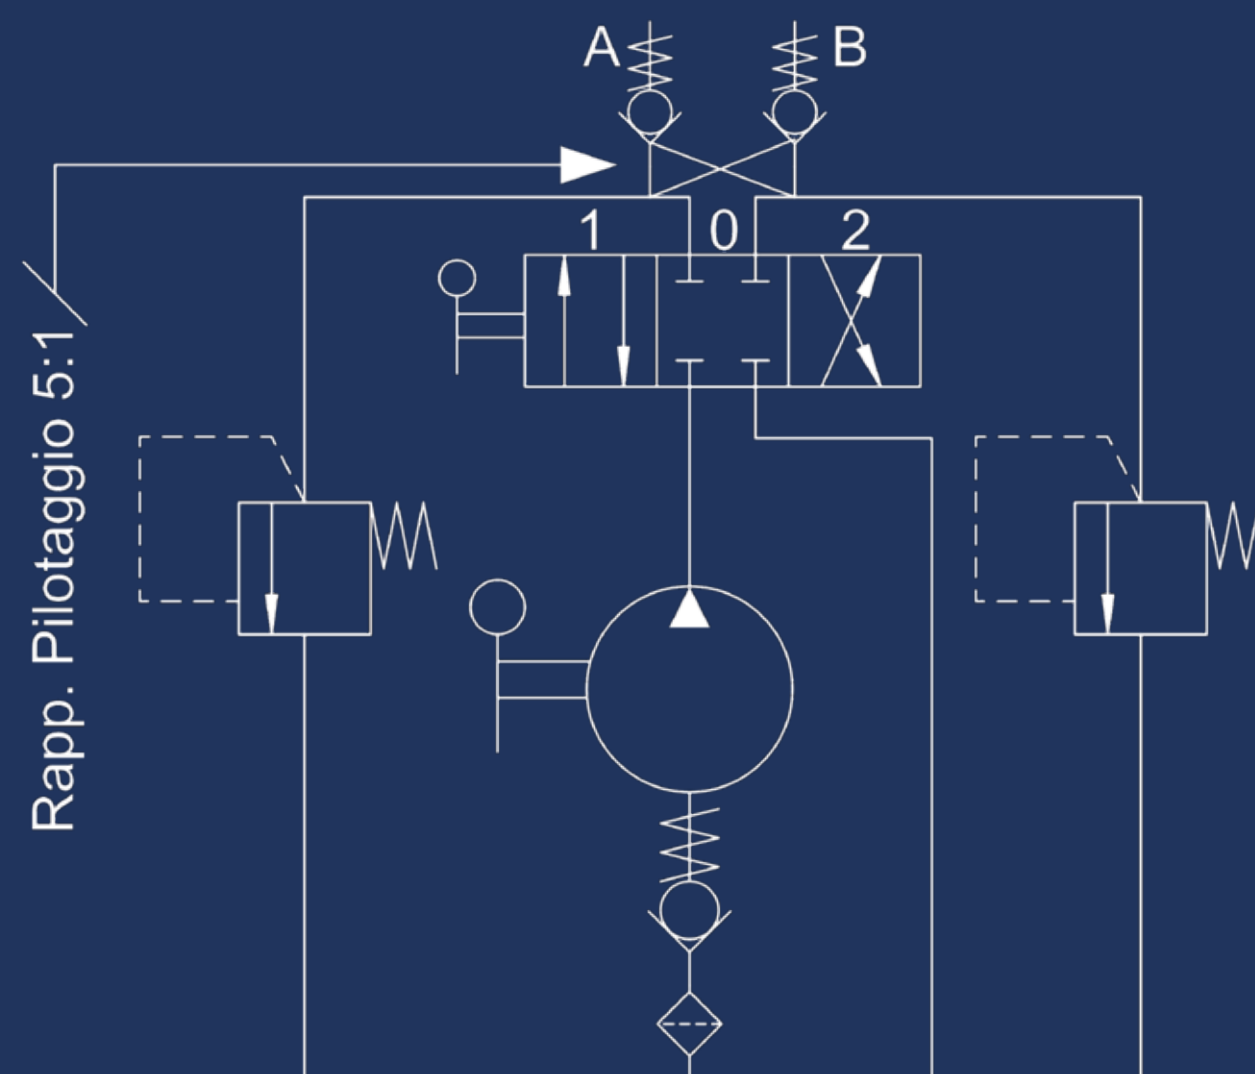

EFFORT DIAGRAM

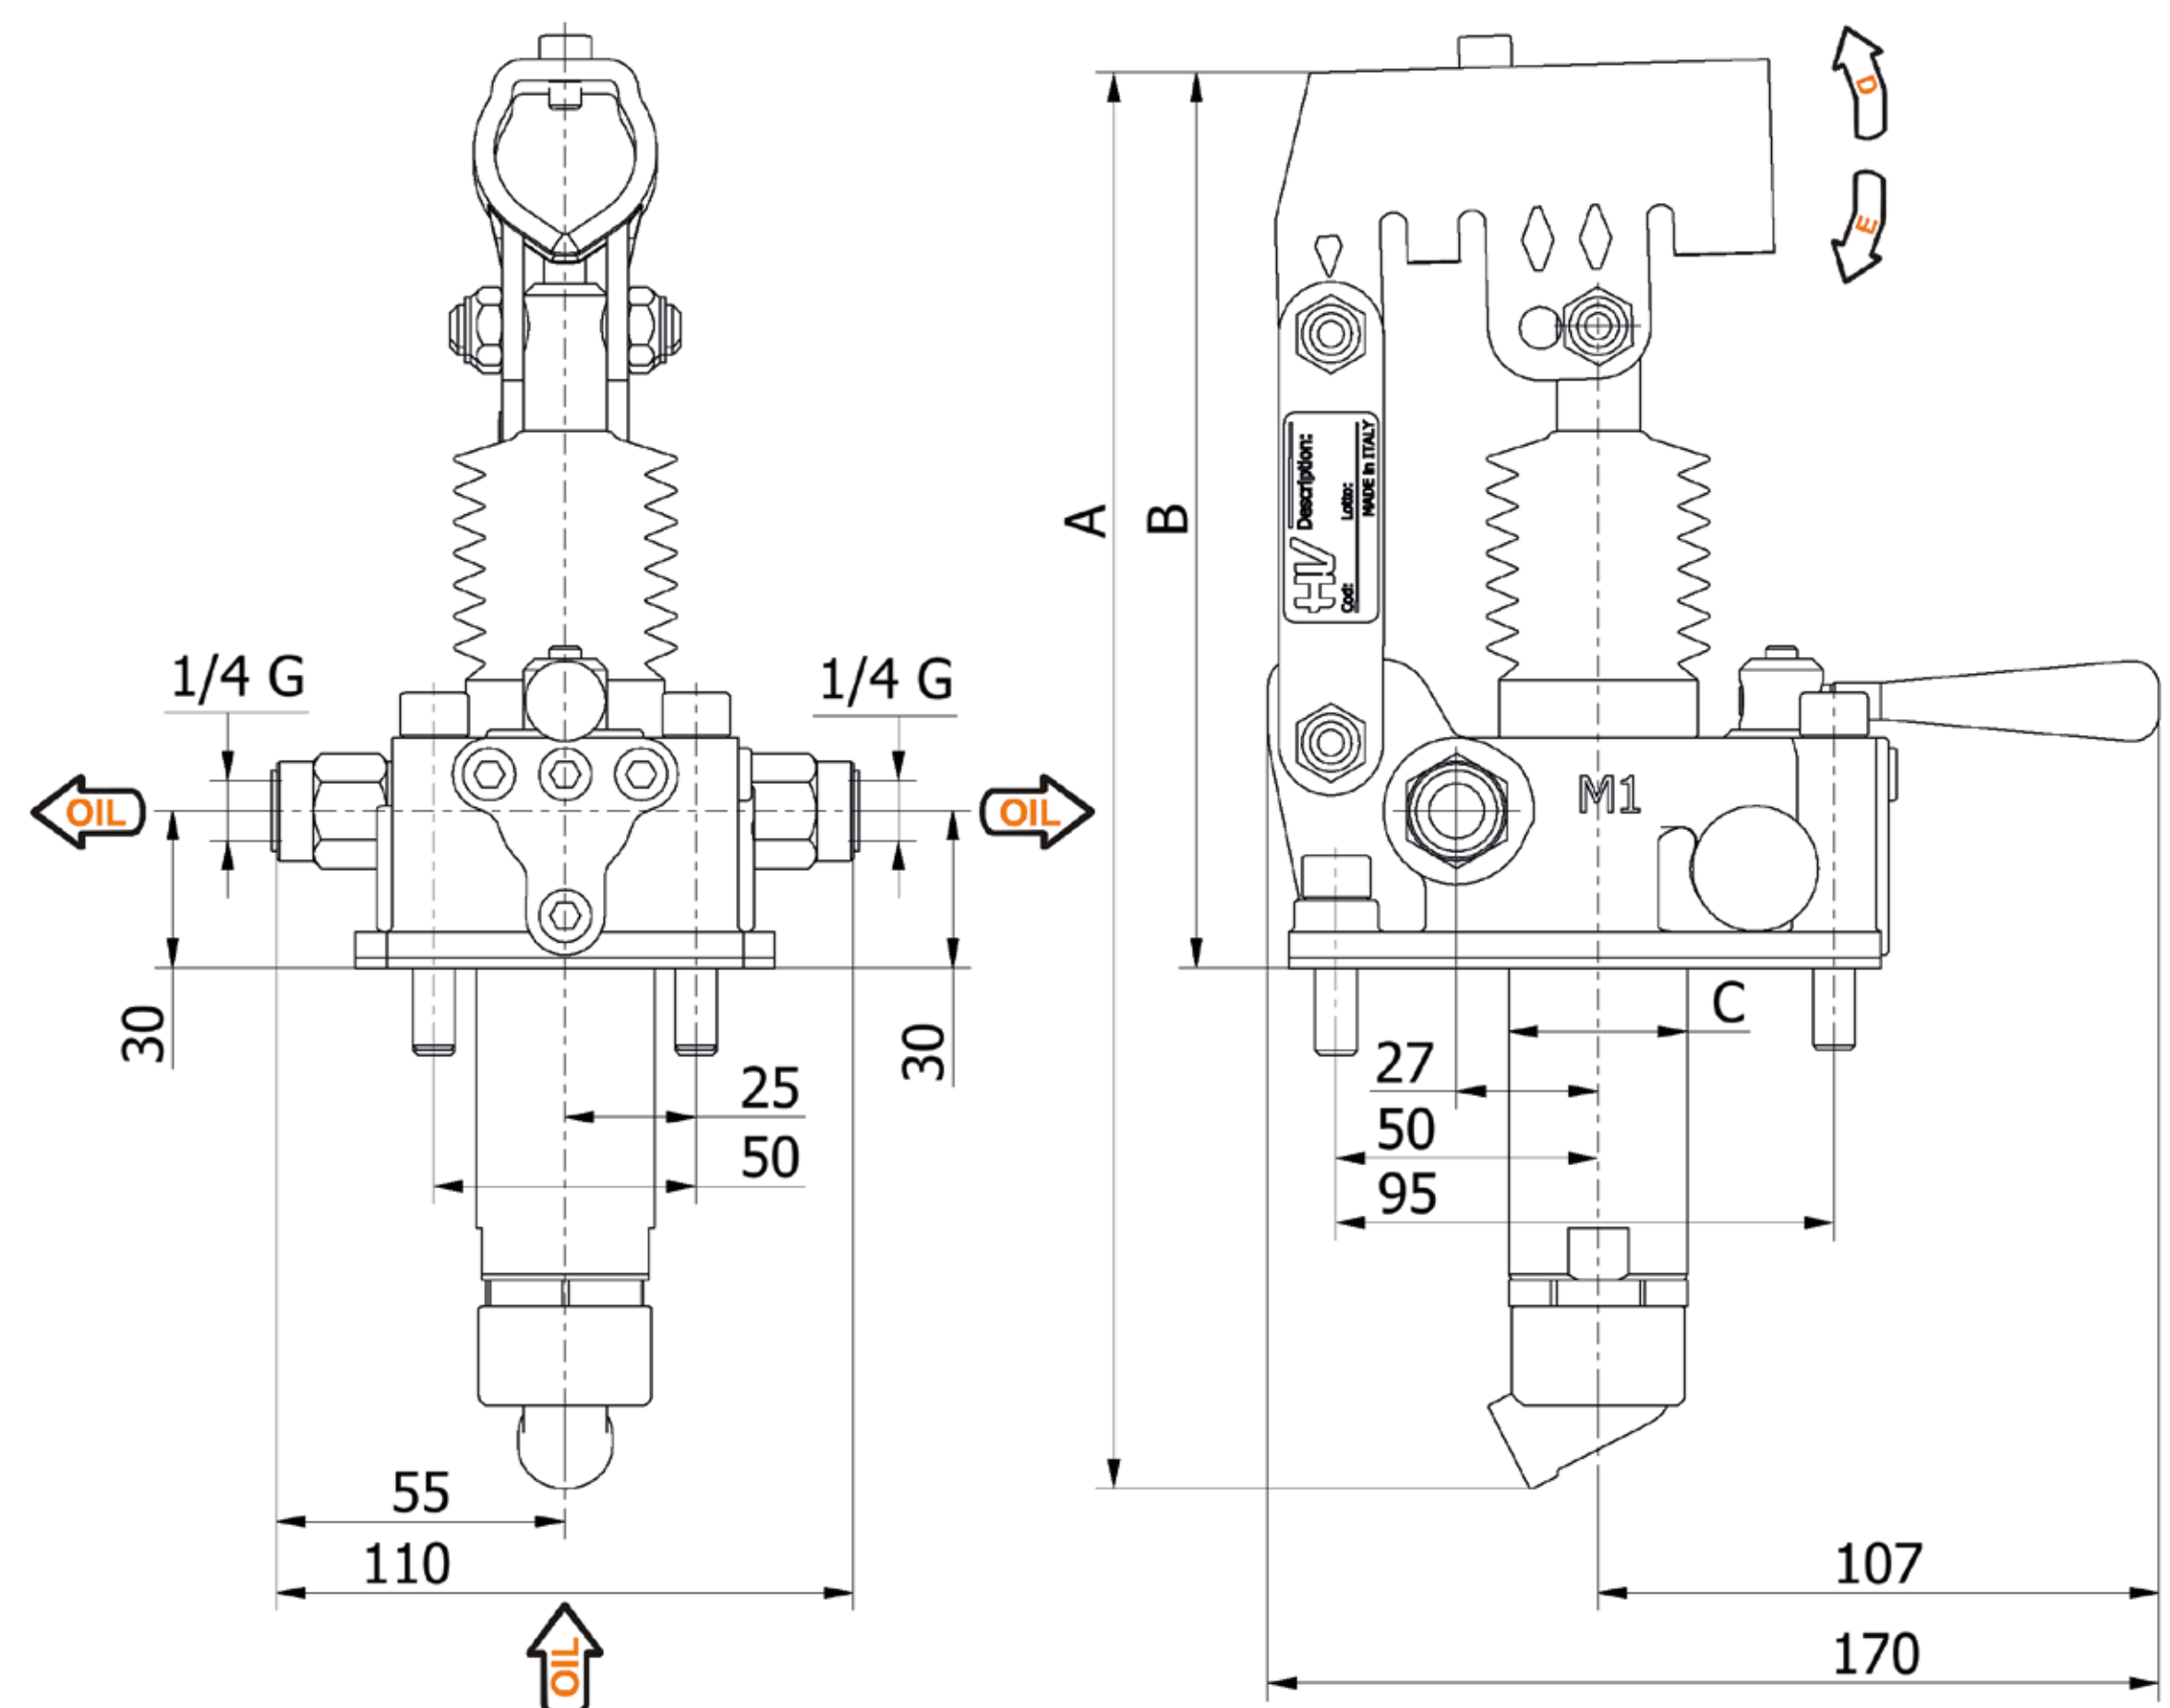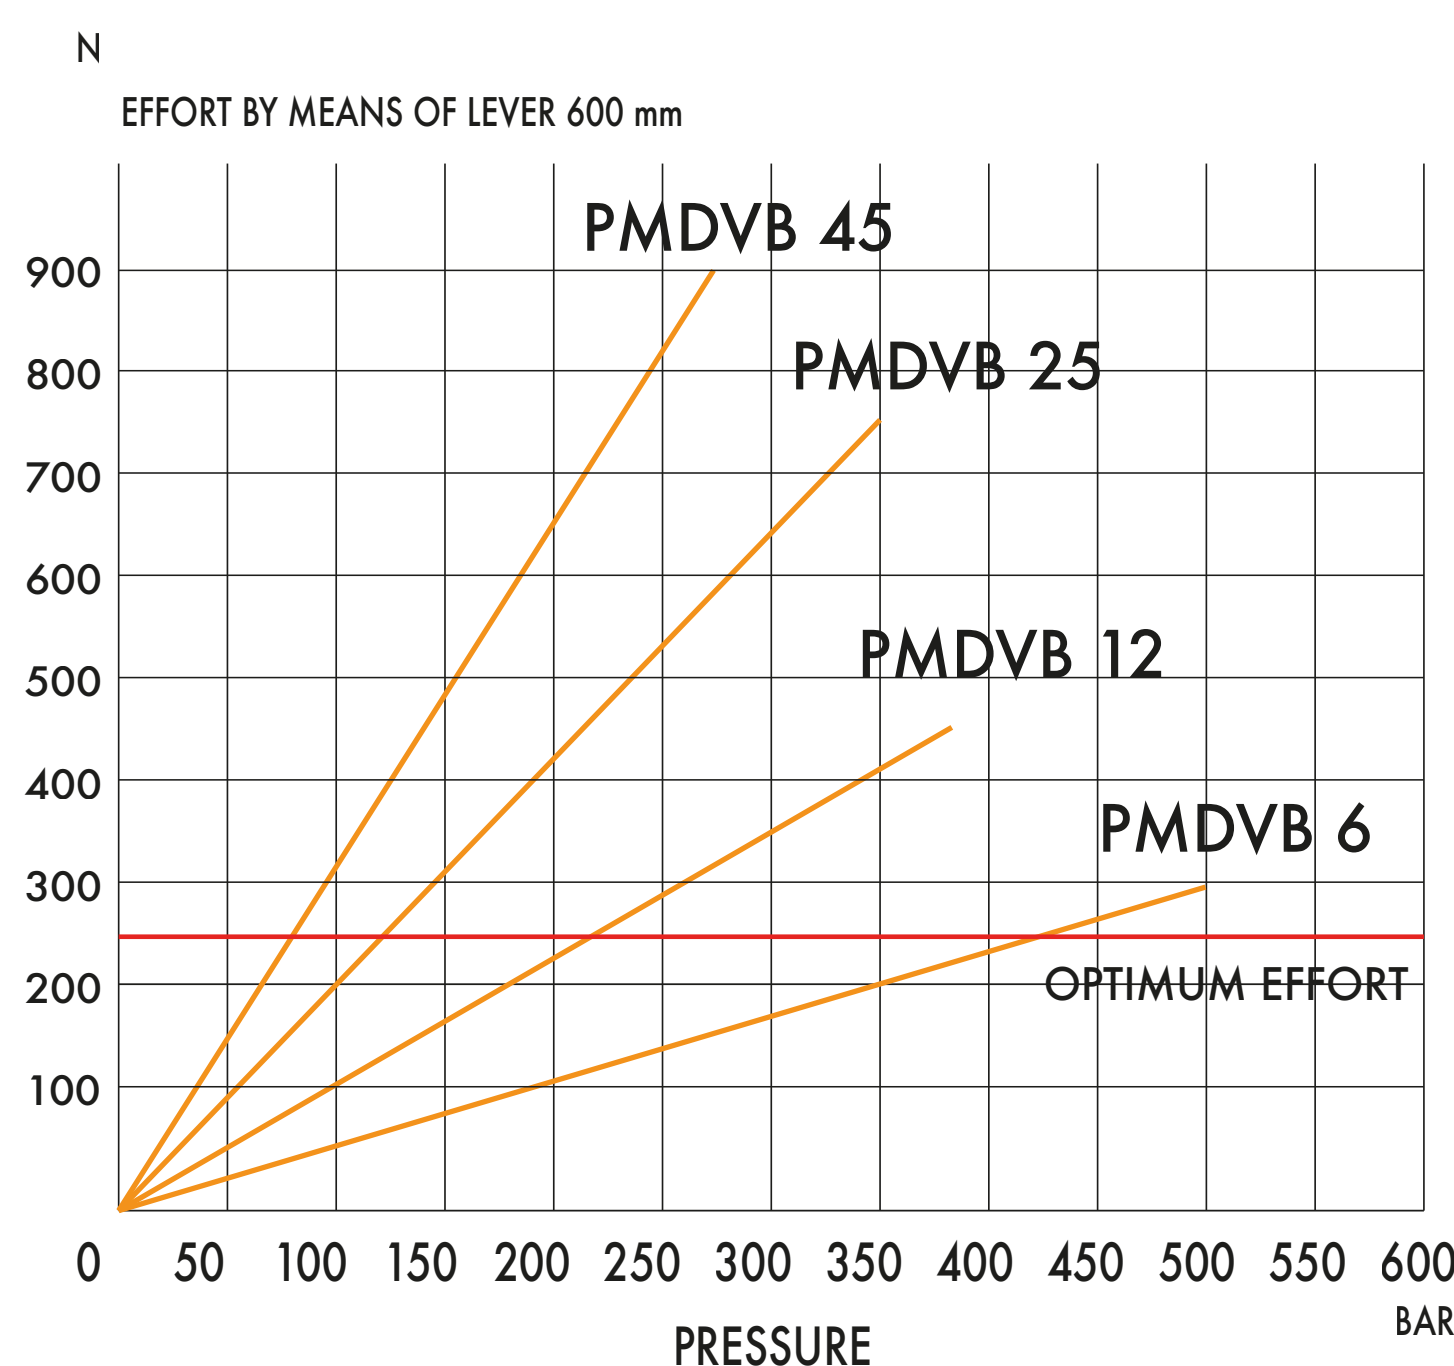
[illegible]

Hand pumps
 PMDVB 6-12-25-45 cc-byA-s
 Tech sheet



DETAILS
 with 4/3 diverter closed centre
 with dual pilot check valve
 with brakes - with pressure relief valve double acting
 hand pump for a double acting cylinder for fixing to tank

SPECIFICATIONS
 Cast iron body
 Piston treated with Niploy
 White zinc plated support lever
 Lever connection Ø 27
 White zinc plated external parts
 Standard colour black
 Oil tank mounting kit included
 With hydraulic brakes to operate under 50 bar pressure
 Pressure relief valve standard setting: 100 bar

HYDRAULIC DIAGRAM

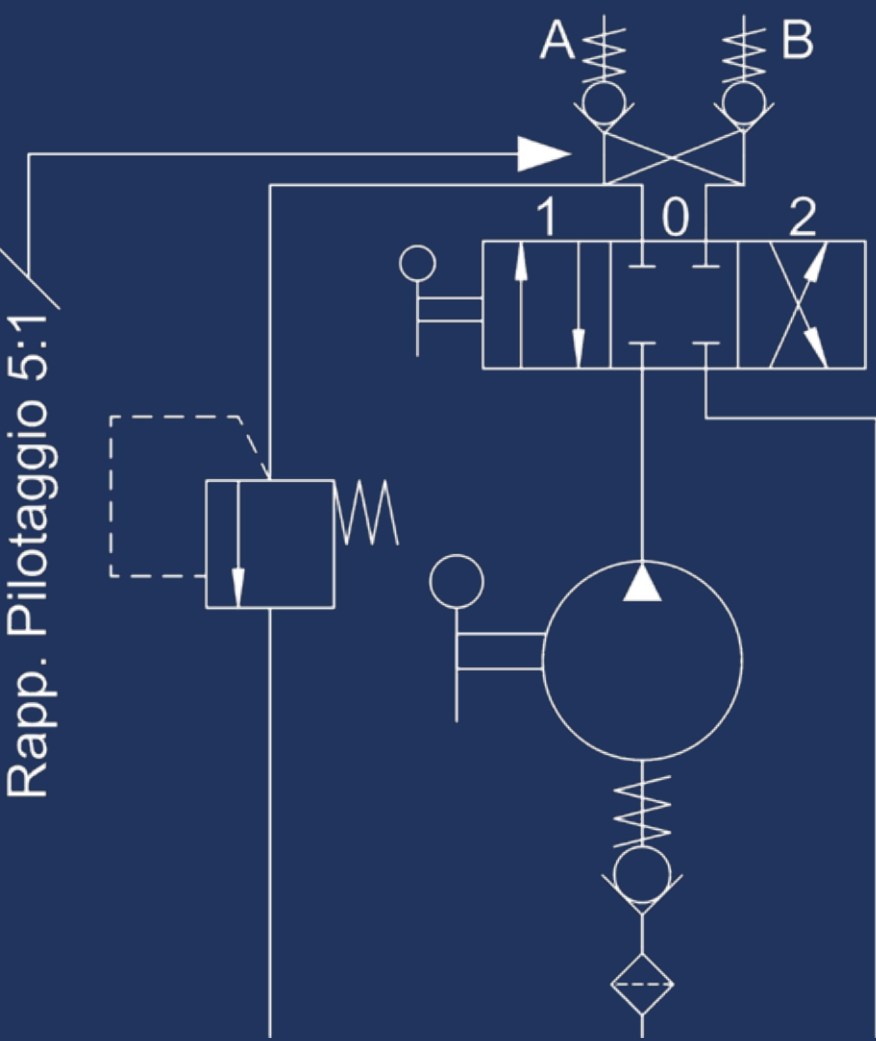

EFFORT DIAGRAM

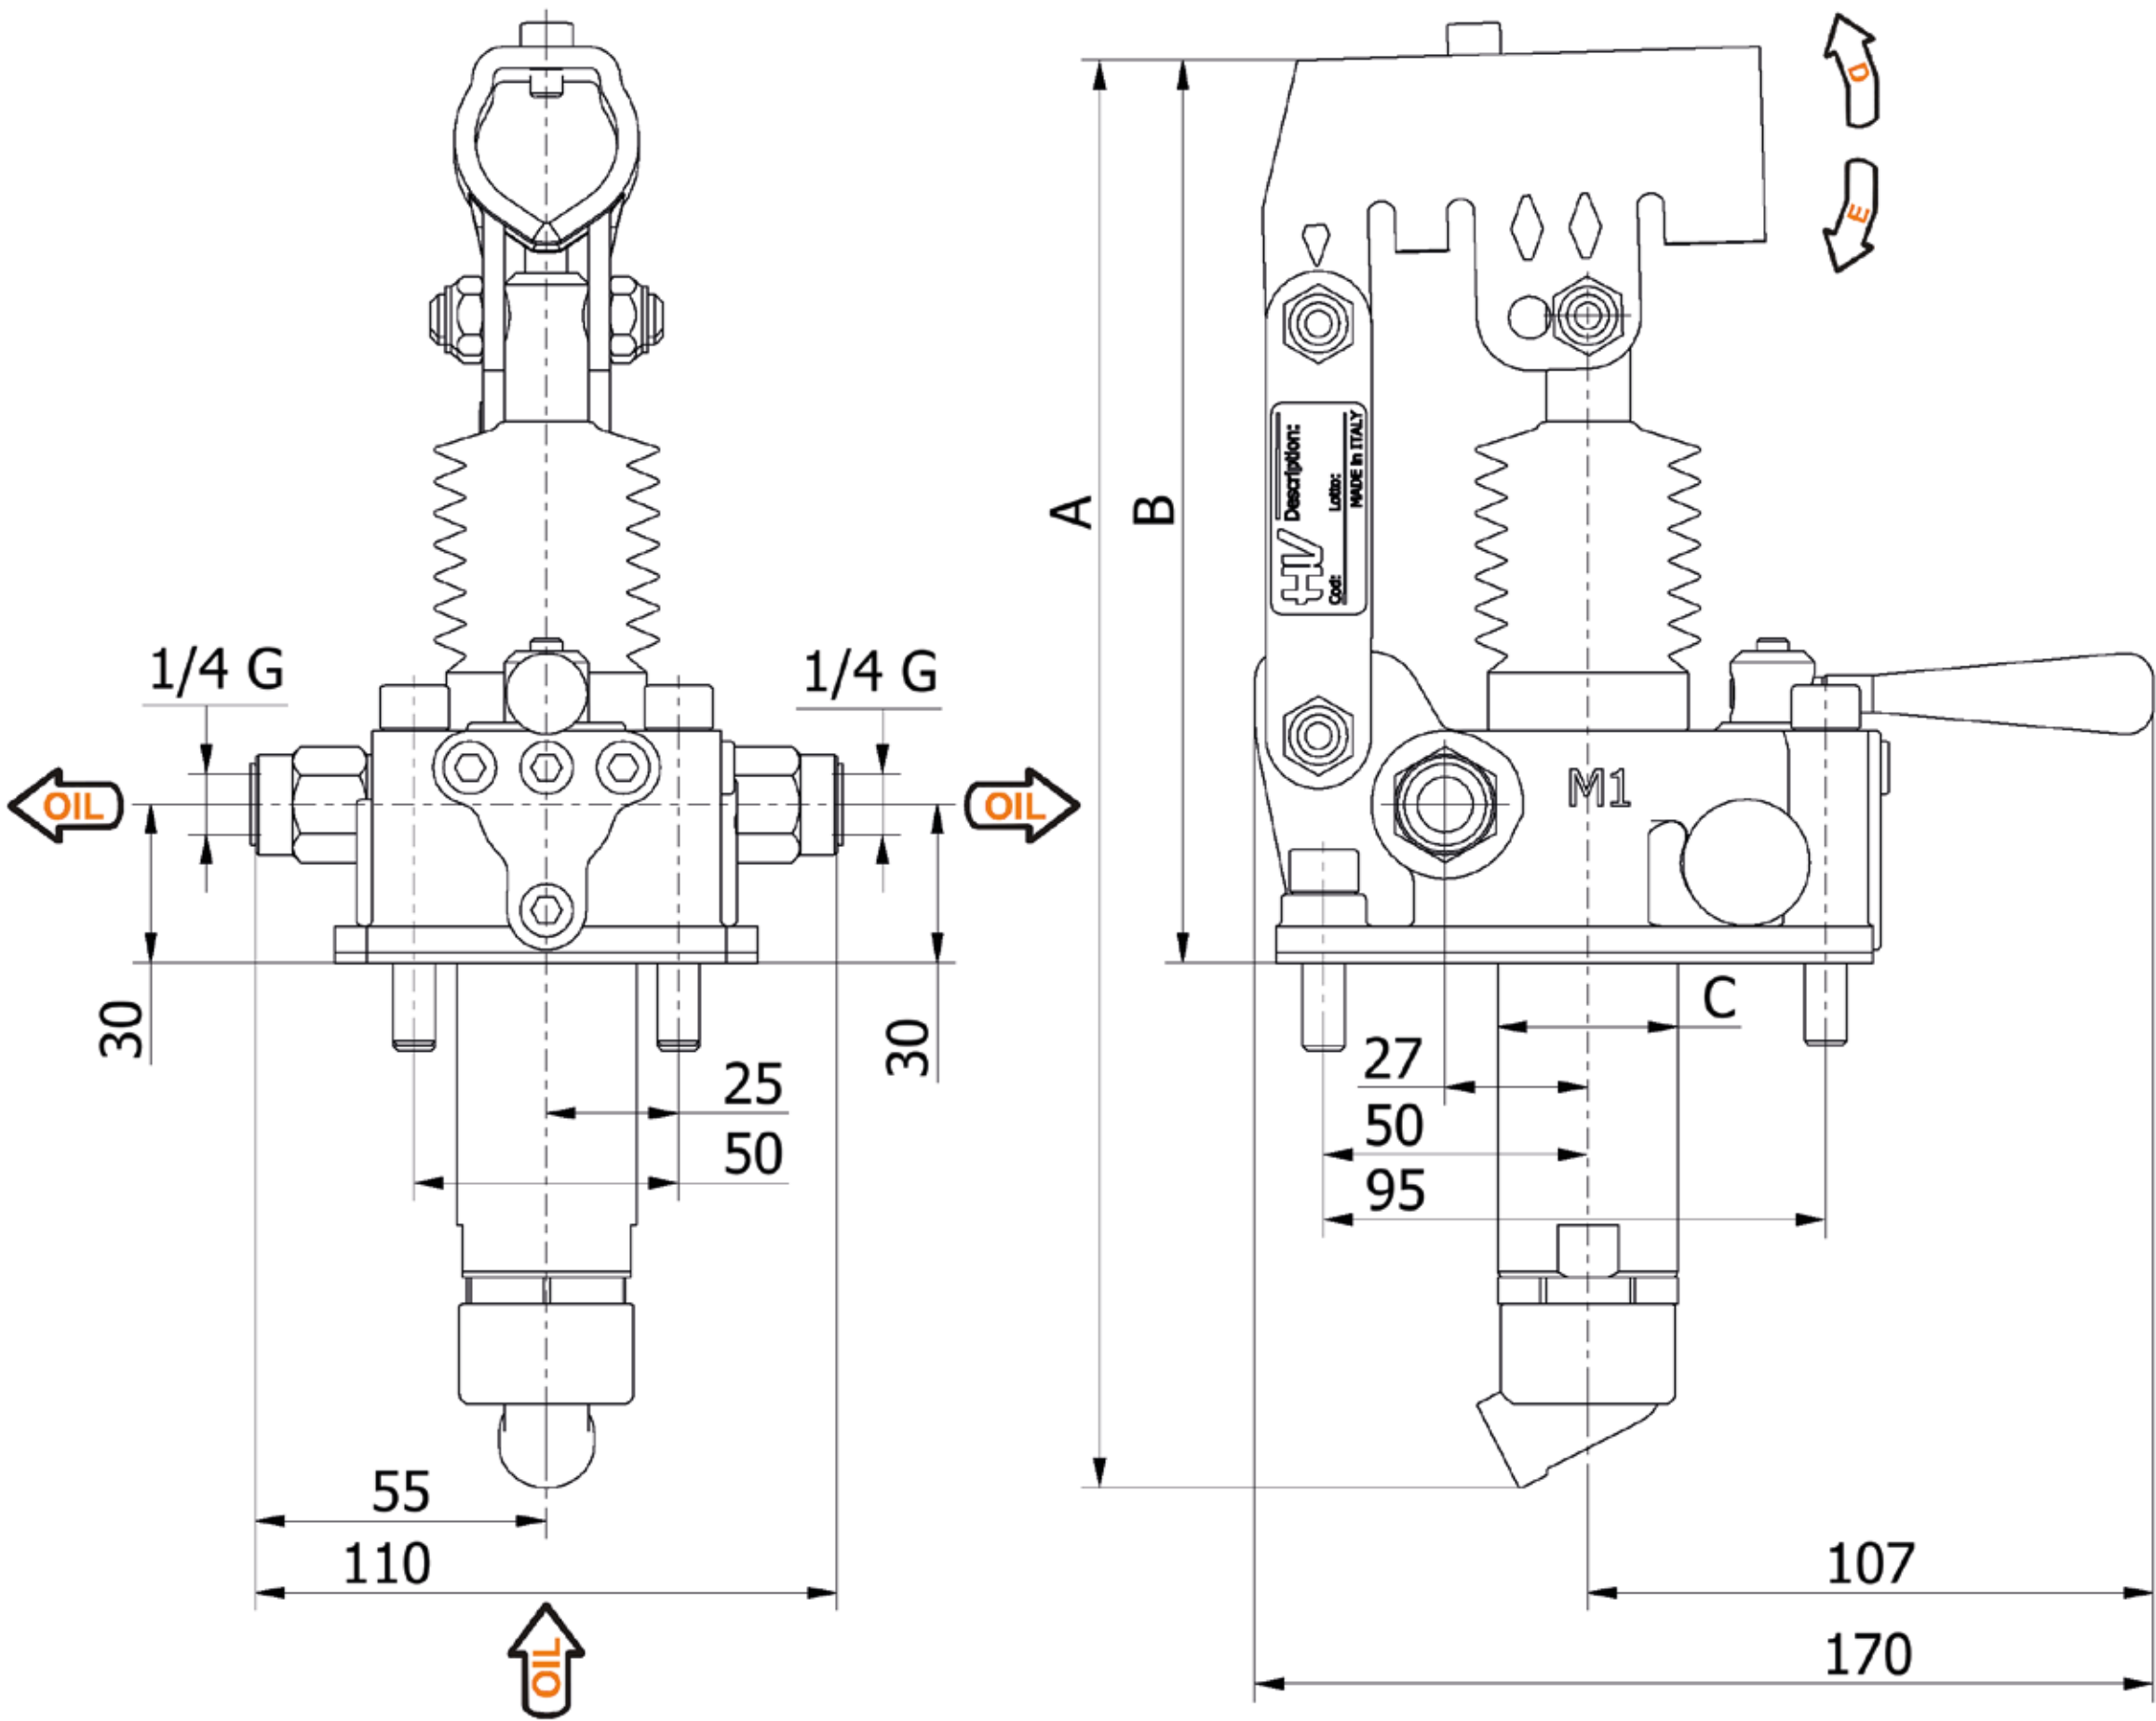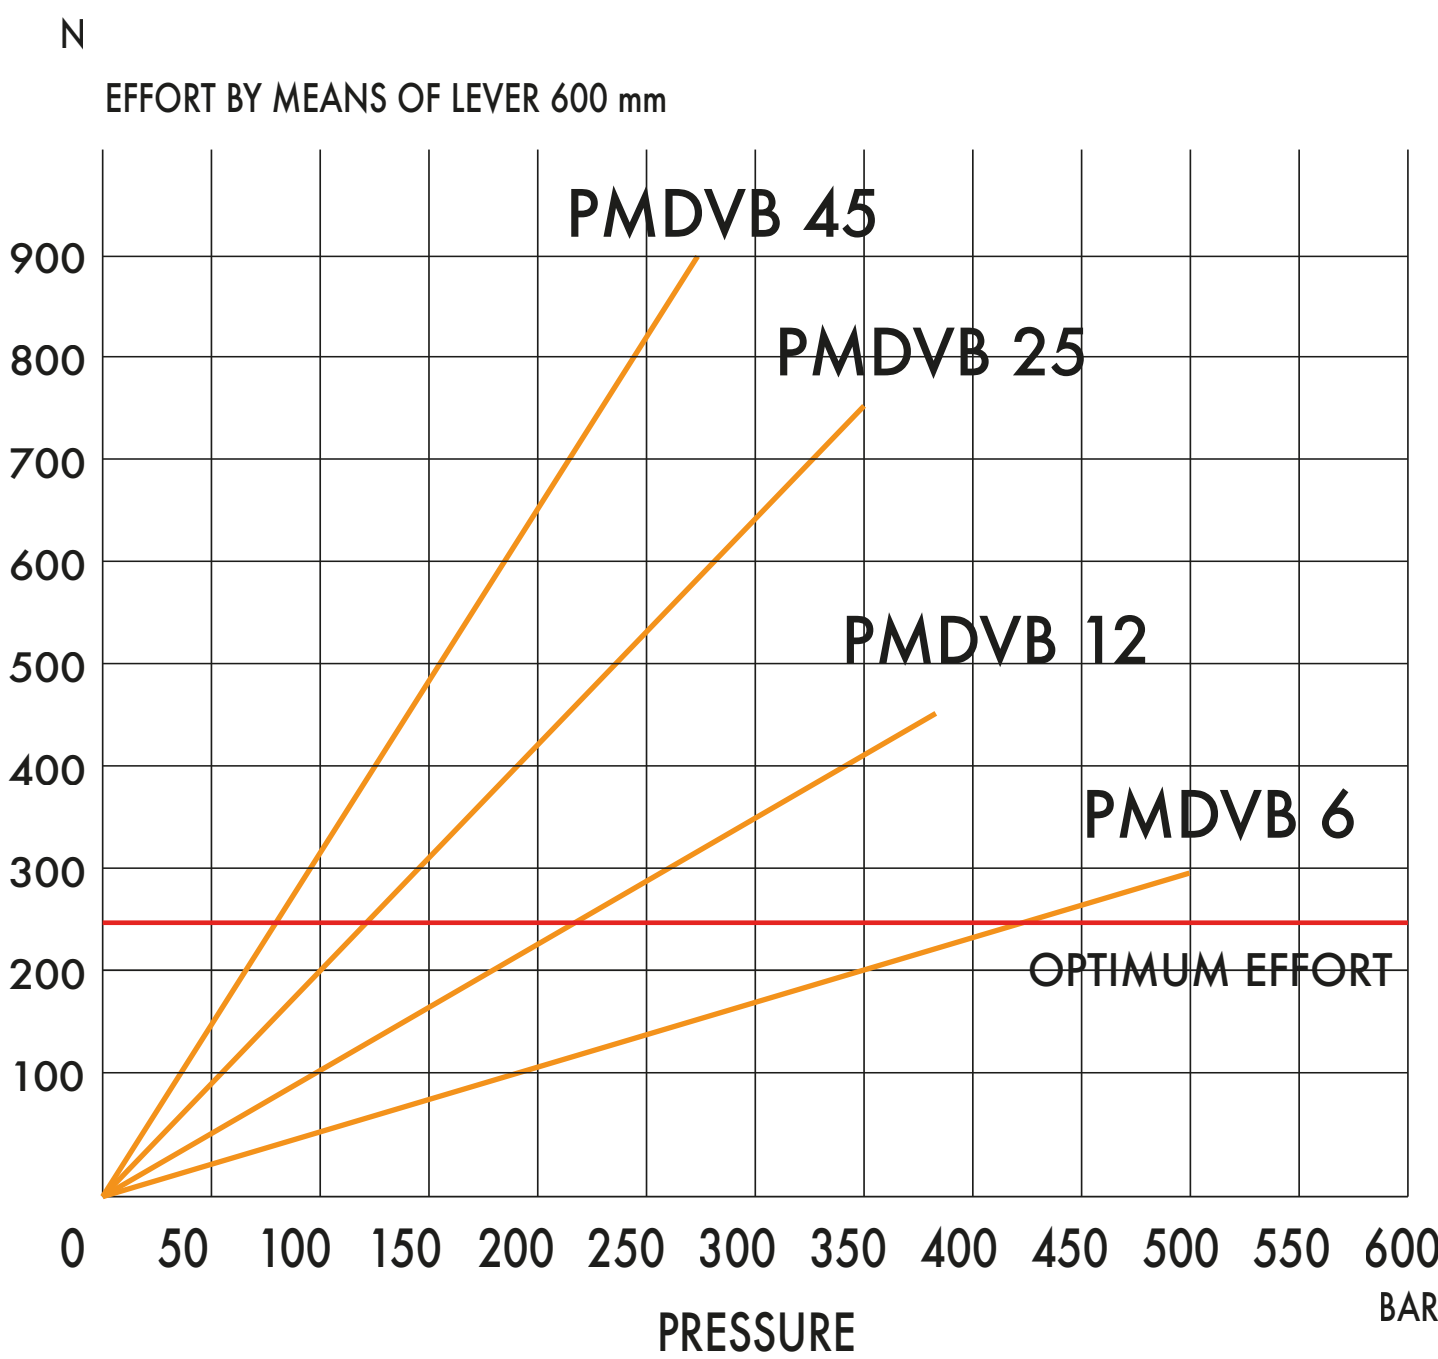

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
6	253	166	34	26	31	6,970	420	500	3,400	6059.0107
12	253	166	34	26	31	12,095	220	380	3,400	6060.0107
25	273	172	34	30	30	25,280	120	350	3,450	6061.0107
45	283	172	40	45	33	44,532	80	280	3,500	6062.0107

Hand pumps


PMDVB 6-12-25-45 ca-s

 Tech sheet



DETAILS
 with 4/3 diverter opened centre
 with dual pilot check valve
 with brakes
 double acting hand pump for a double acting cylinder for fixing to tank

SPECIFICATIONS
 Cast iron body
 Piston treated with Niploy
 White zinc plated support lever
 Lever connection Ø 27
 White zinc plated external parts • Standard colour black
 Oil tank mounting kit included
 With hydraulic brakes to operate under 50 bar pressurer

HYDRAULIC DIAGRAM

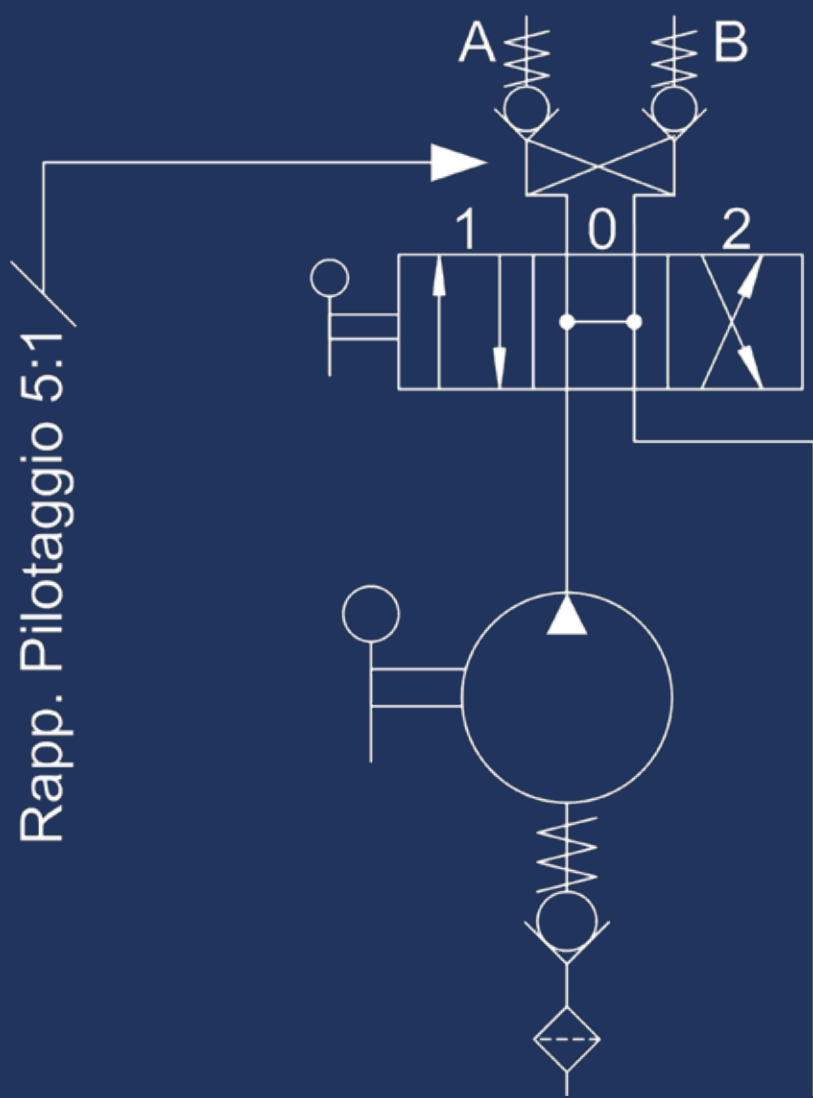

EFFORT DIAGRAM

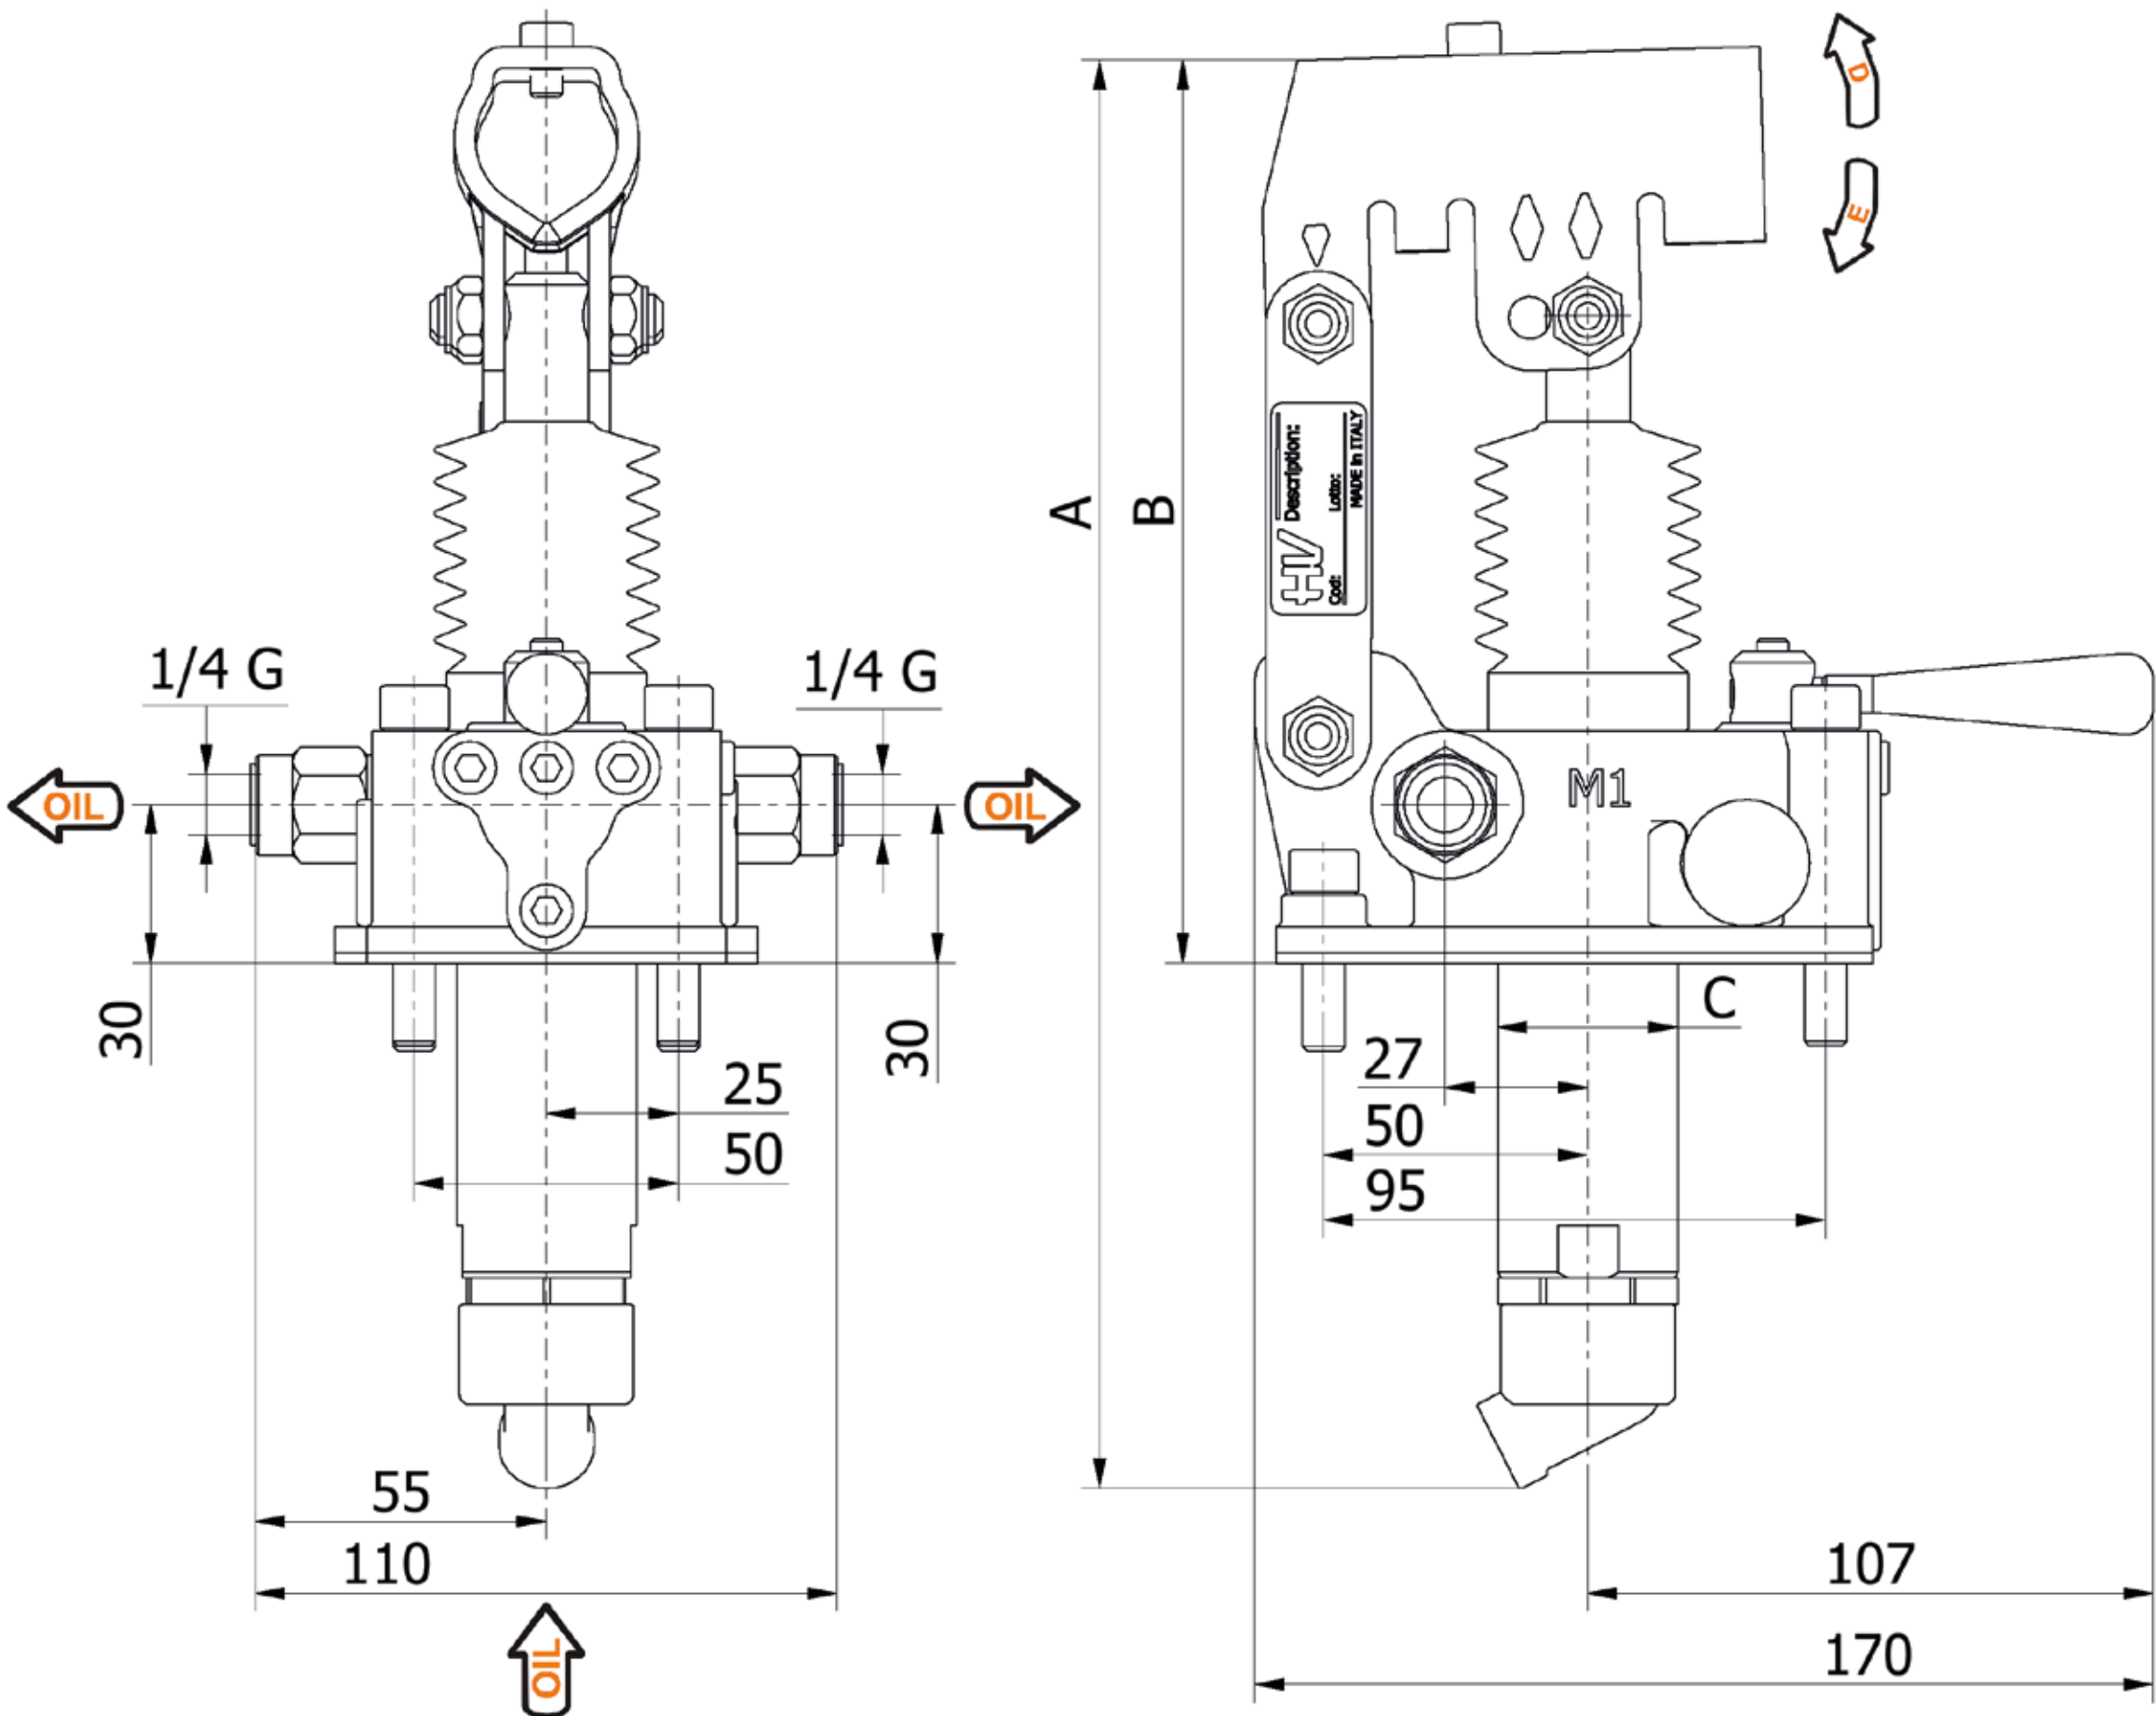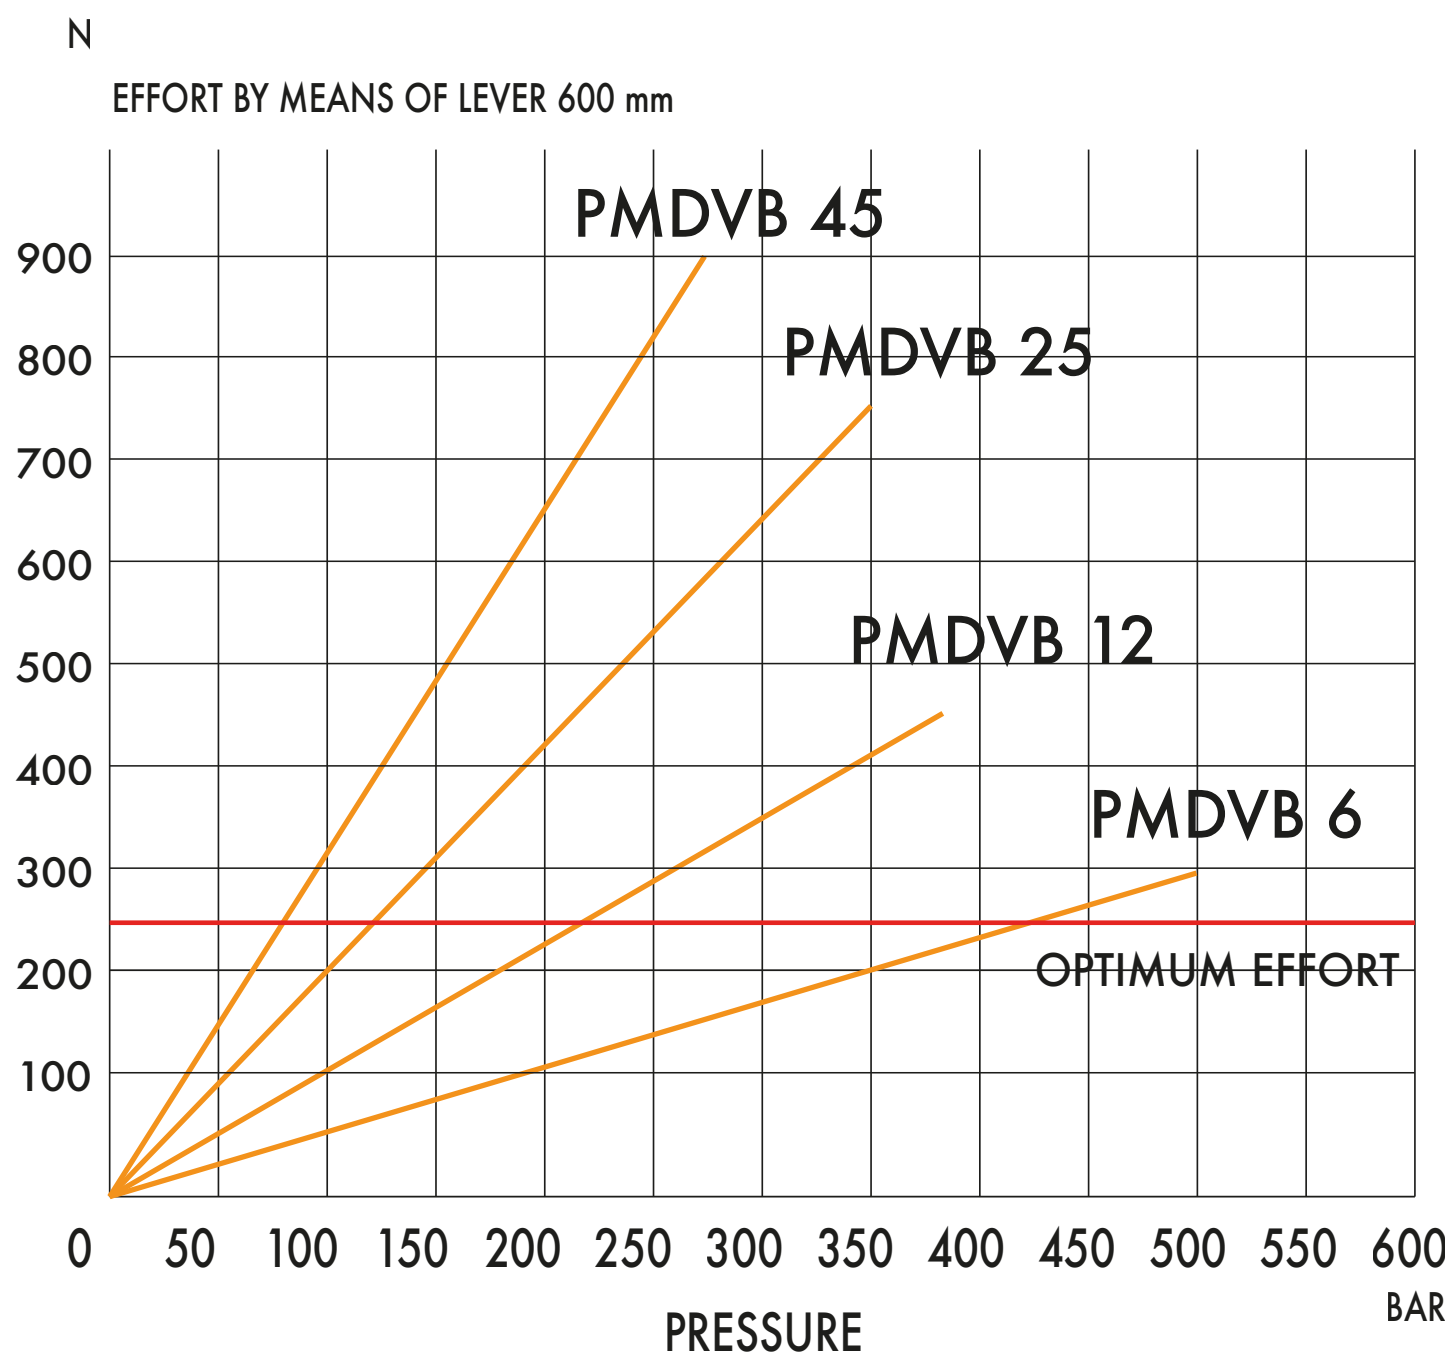

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
6	253	166	34	26	31	6,970	420	500	3,400	6059.0301
12	253	166	34	26	31	12,095	220	380	3,400	6060.0301
25	273	172	34	30	30	25,280	120	350	3,450	6061.0301
45	283	172	40	45	33	44,532	80	280	3,500	6062.0301

Hand pumps

PMDVB 6-12-25-45 ca-byB-s

Tech sheet


DETAILS

with 4/3 diverter opened centre
 with dual pilot check valve
 with brakes - with pressure relief valve double acting
 hand pump for a double acting cylinder for fixing to tank



SPECIFICATIONS

Cast iron body
 Piston treated with Niploy
 White zinc plated support lever
 Lever connection Ø 27
 White zinc plated external parts • Standard colour black
 Oil tank mounting kit included
 With hydraulic brakes to operate under 50 bar pressure
 Pressure relief valve standard setting: 100 barr

HYDRAULIC DIAGRAM

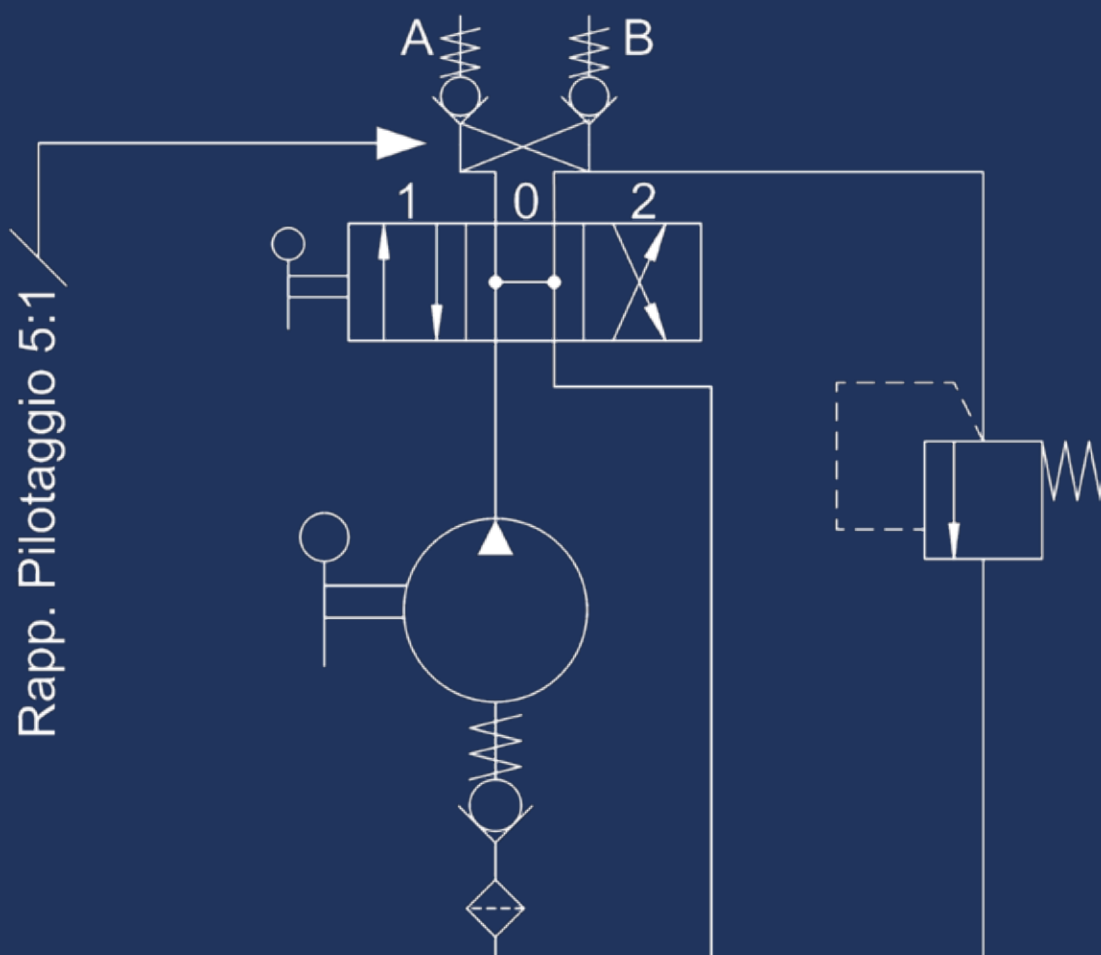

EFFORT DIAGRAM

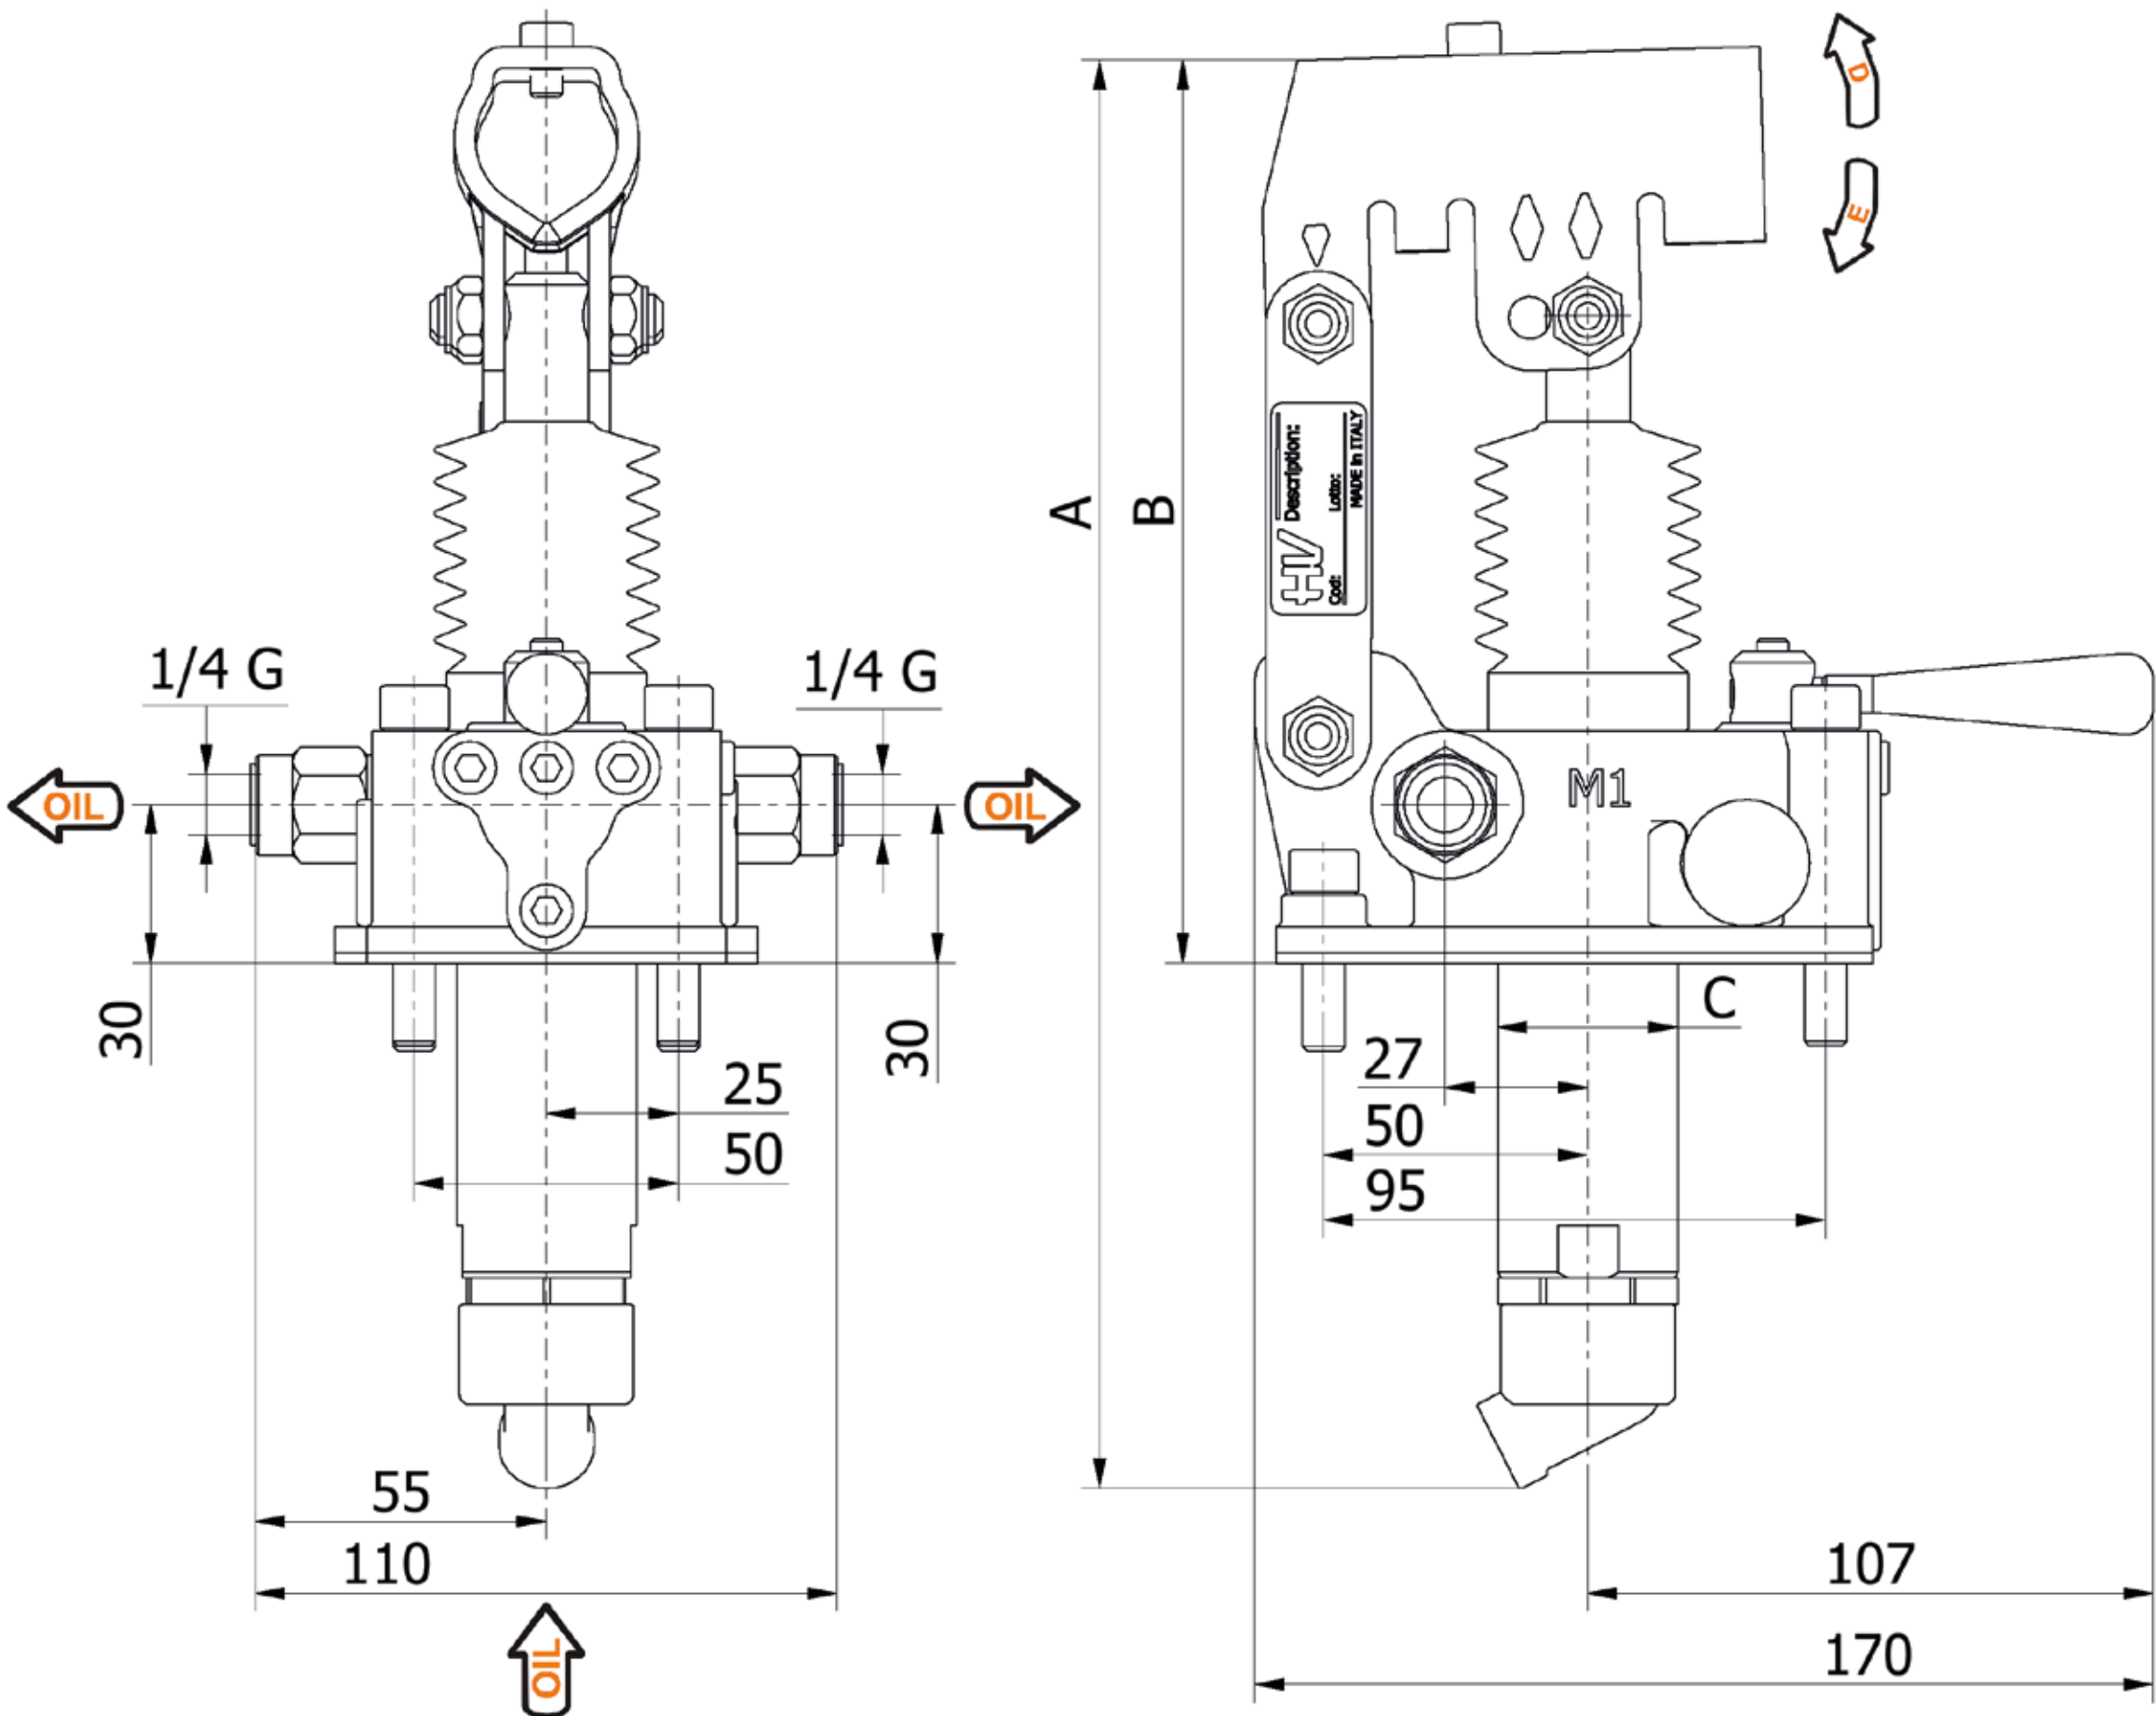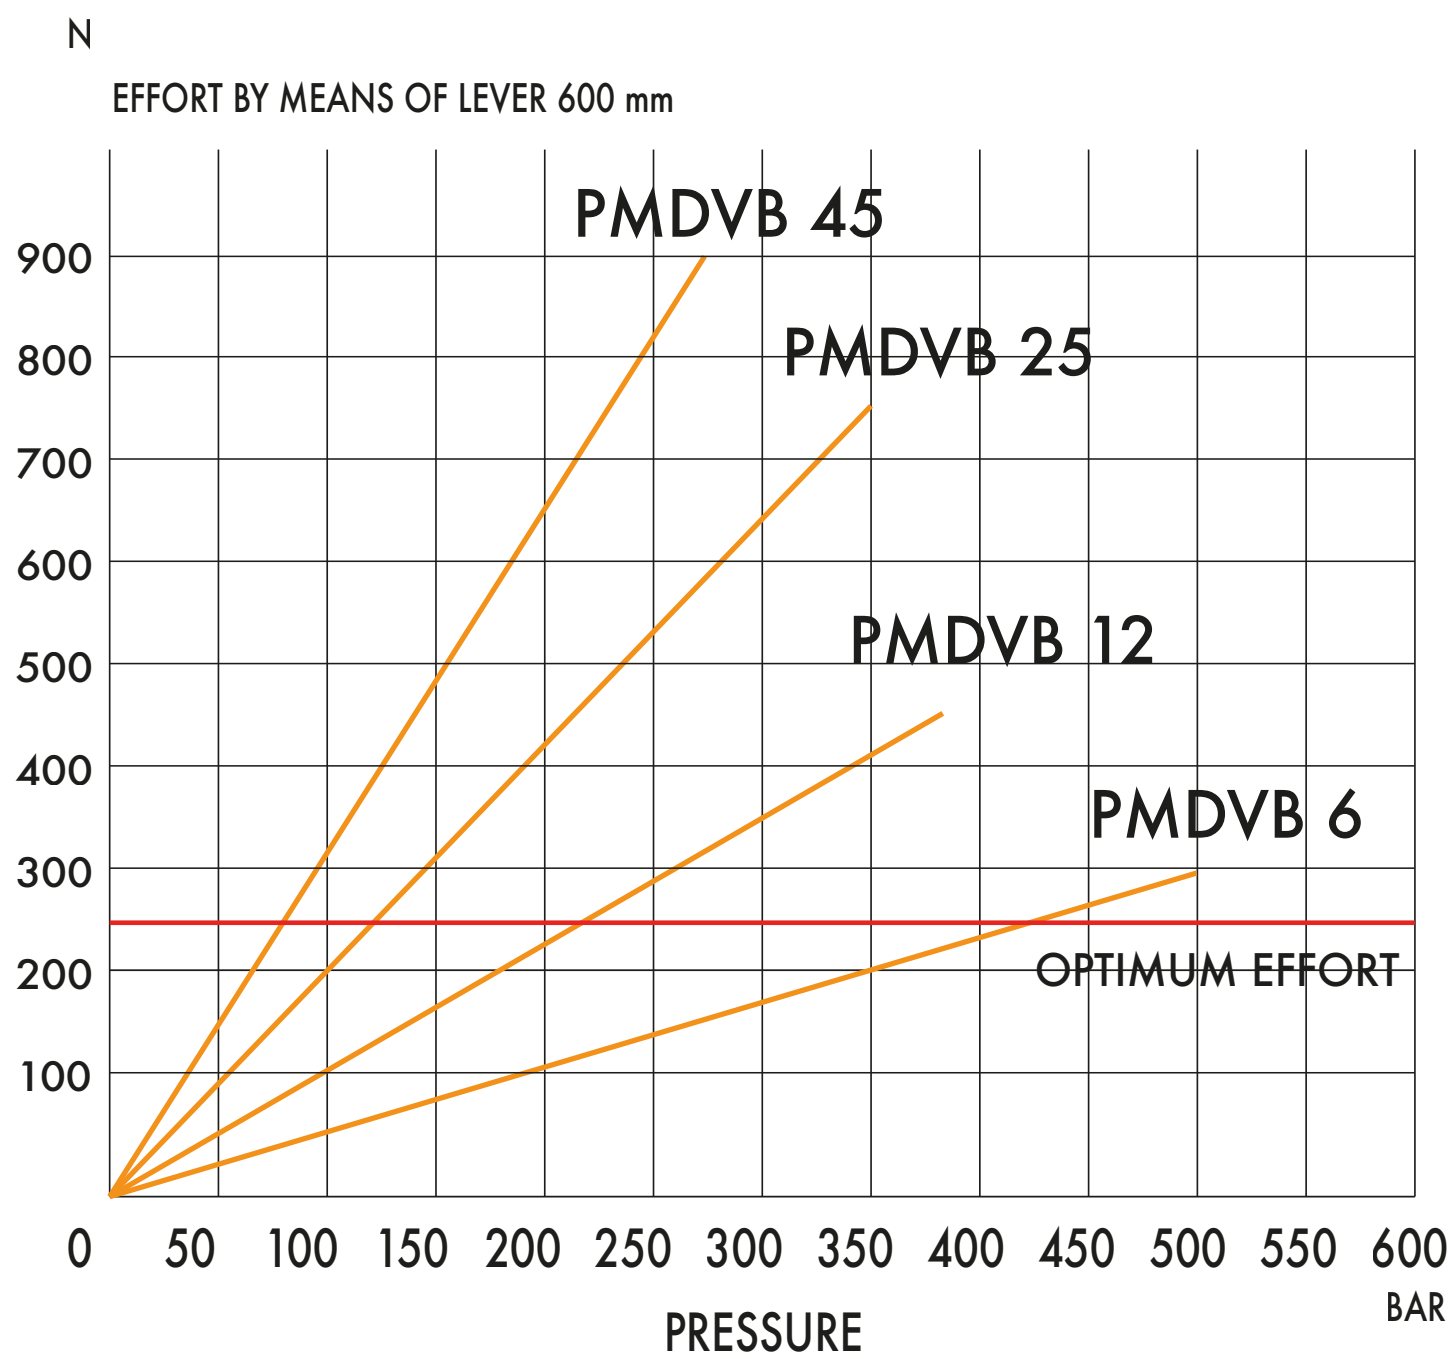

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
6	253	166	34	26	31	6,970	420	500	3,400	6059.0303
12	253	166	34	26	31	12,095	220	380	3,400	6060.0303
25	273	172	34	30	30	25,280	120	350	3,450	6061.0303
45	283	172	40	45	33	44,532	80	280	3,500	6062.0303

Hand pumps

PMDVB 6-12-25-45 ca-byAB-s

Tech sheet


DETAILS

with 4/3 diverter opened centre
 with dual pilot check valve
 with brakes - with pressure relief valve double acting
 hand pump for a double acting cylinder for fixing to tank



SPECIFICATIONS

Cast iron body
 Piston treated with Niploy
 White zinc plated support lever
 Lever connection Ø 27
 White zinc plated external parts • Standard colour black
 Oil tank mounting kit included
 With hydraulic brakes to operate under 50 bar pressure
 Pressure relief valve standard setting: 100 bar

HYDRAULIC DIAGRAM

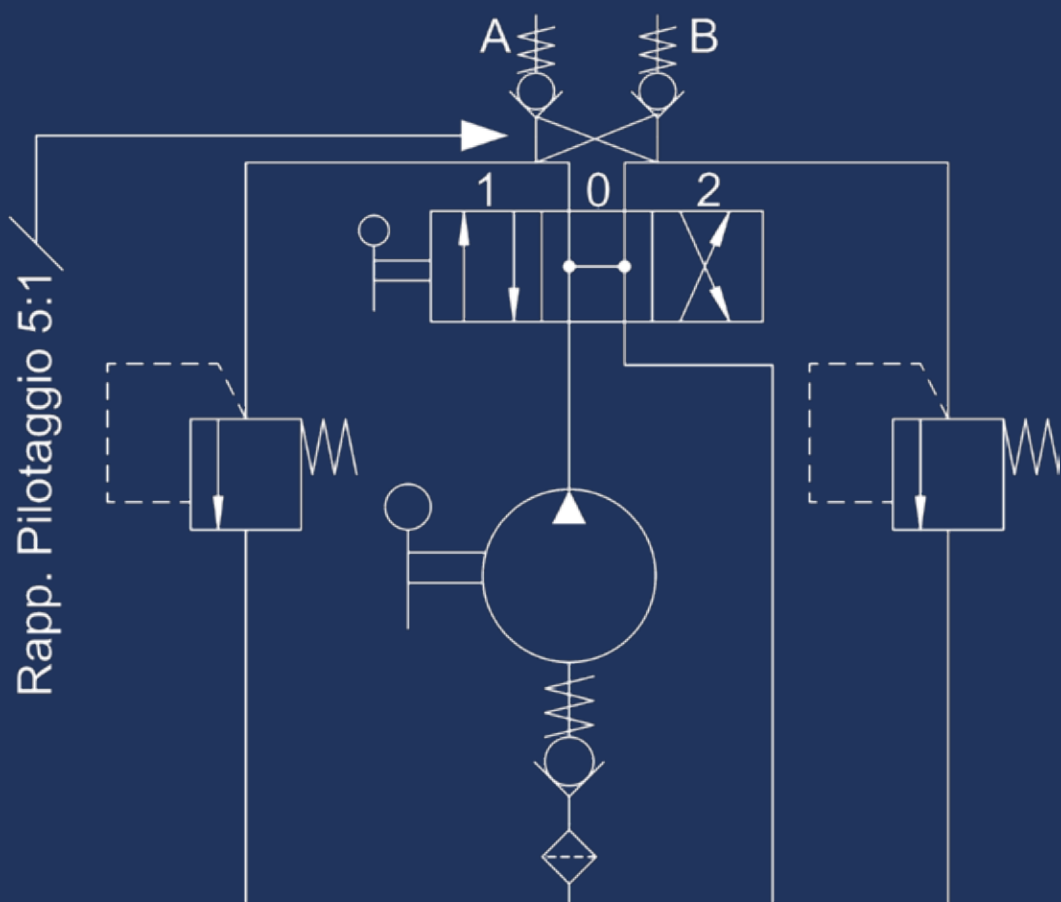

EFFORT DIAGRAM

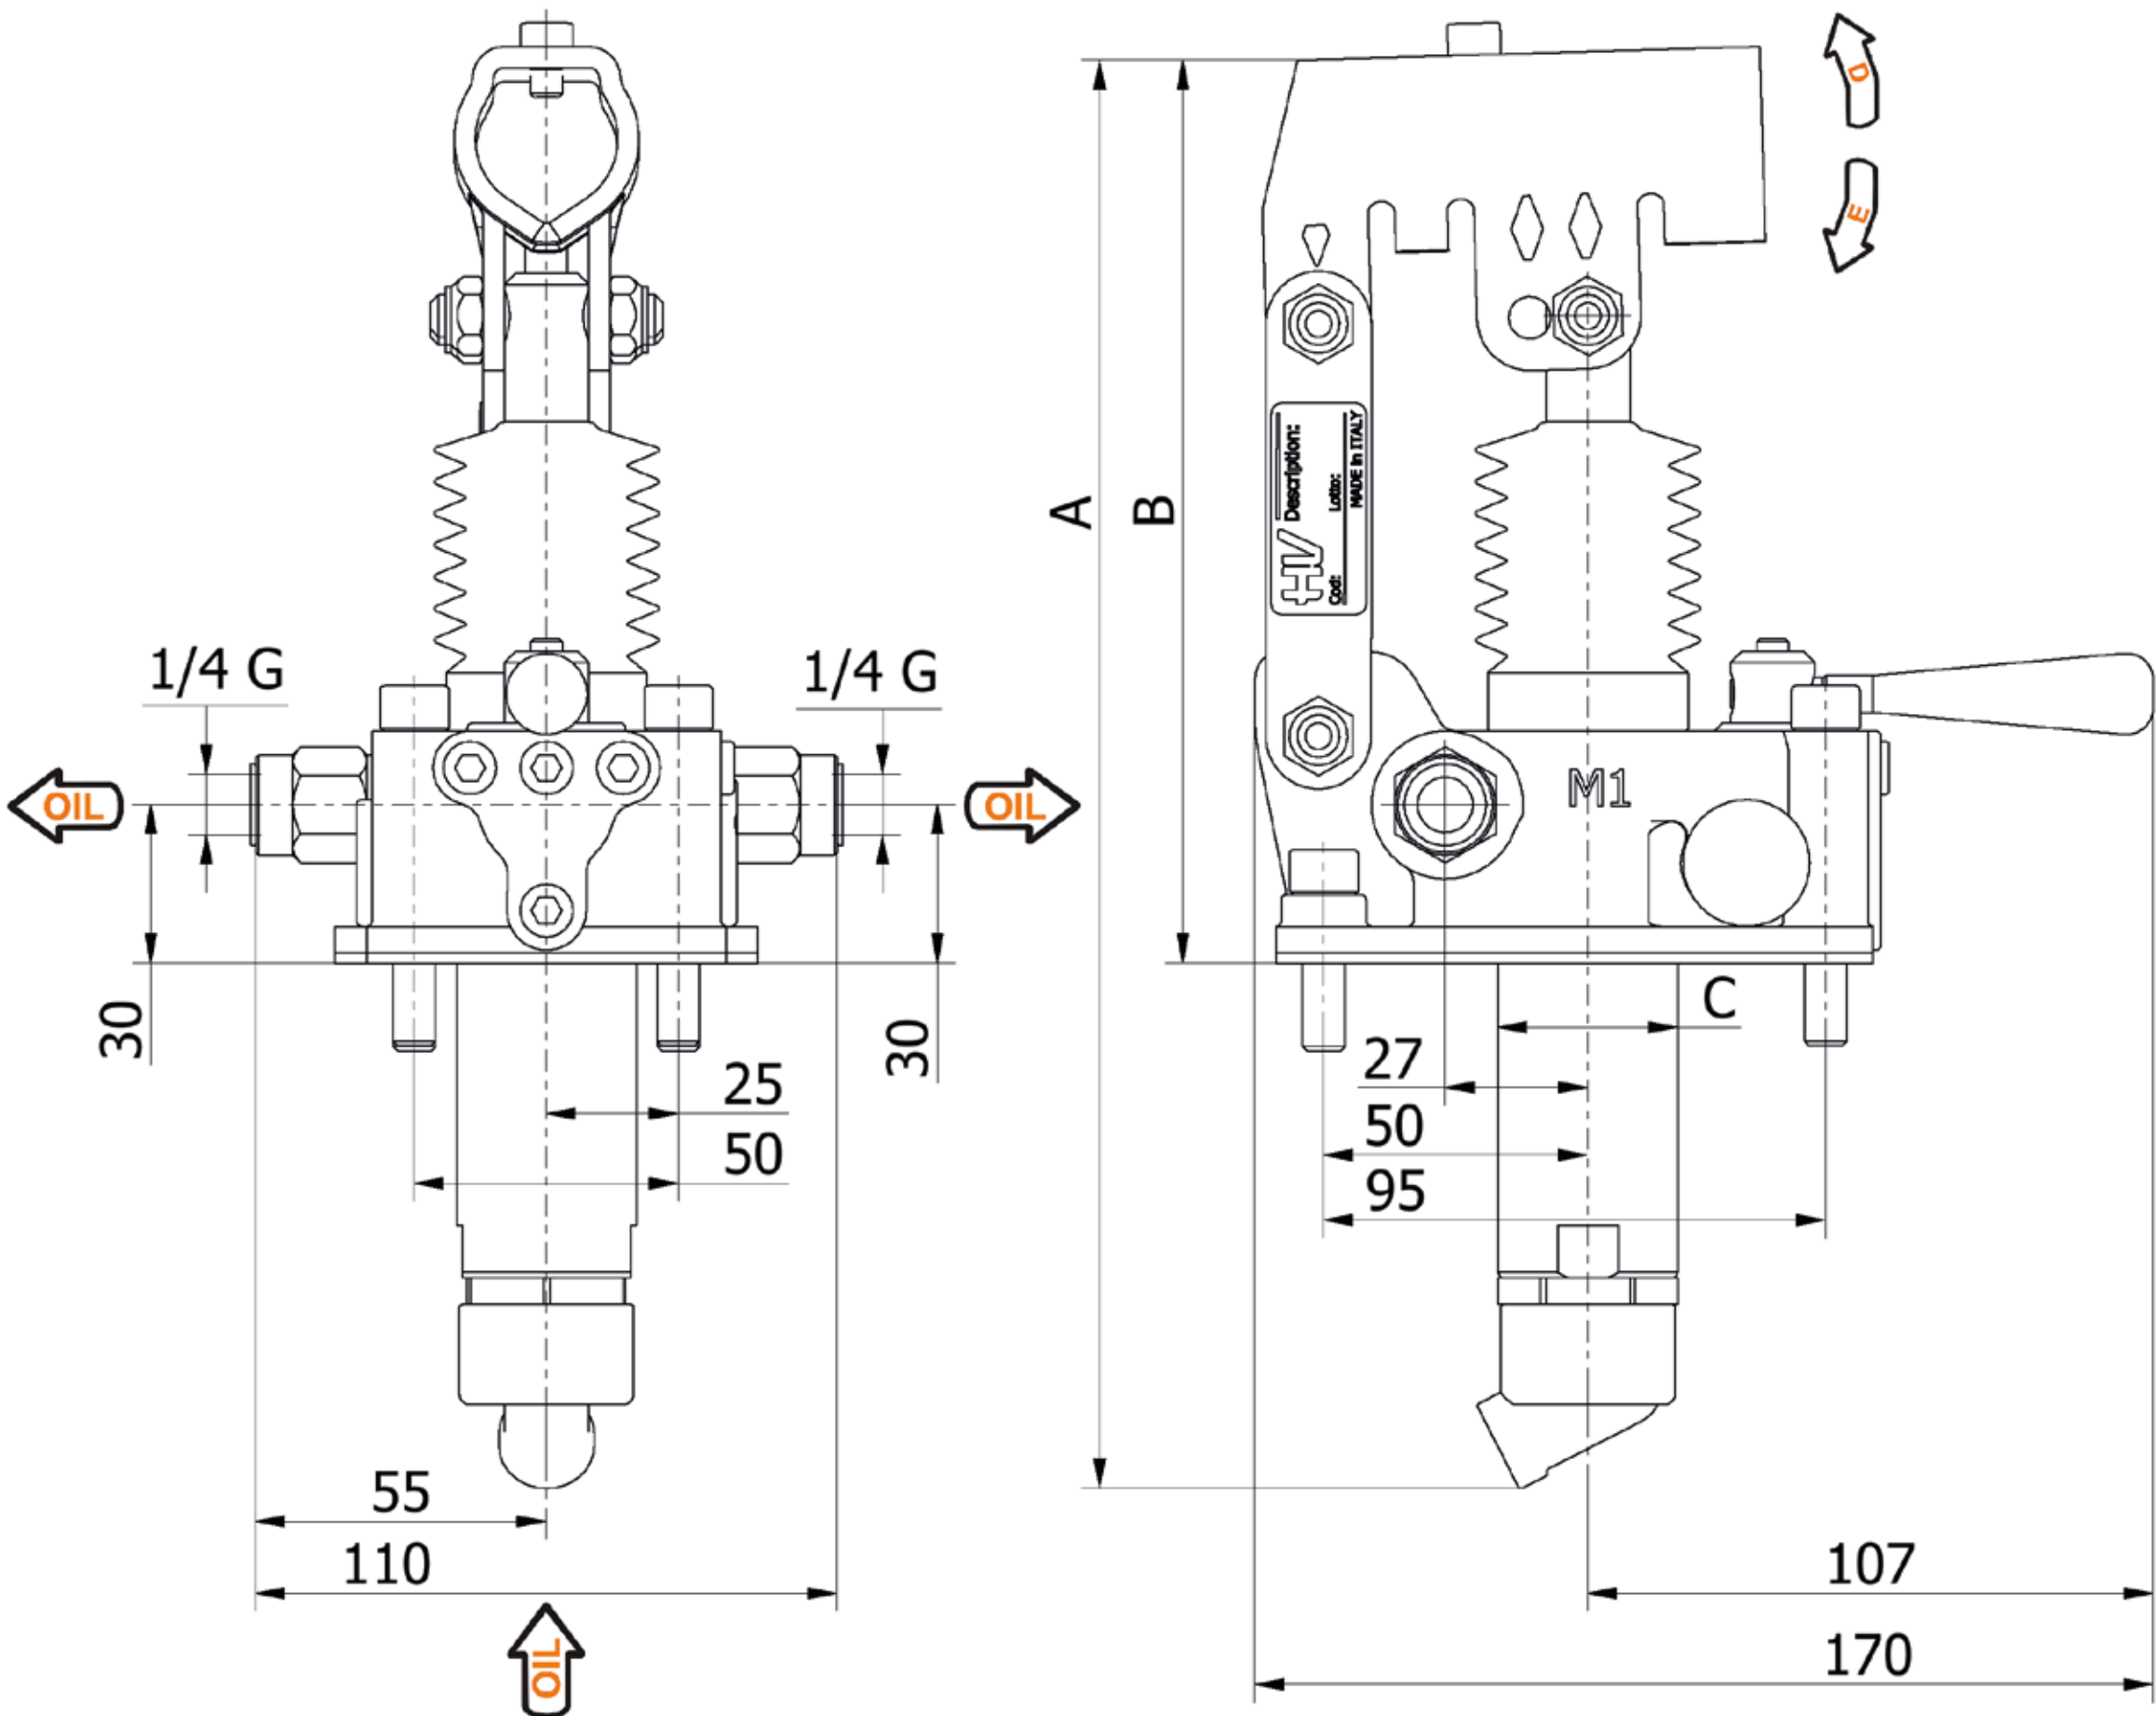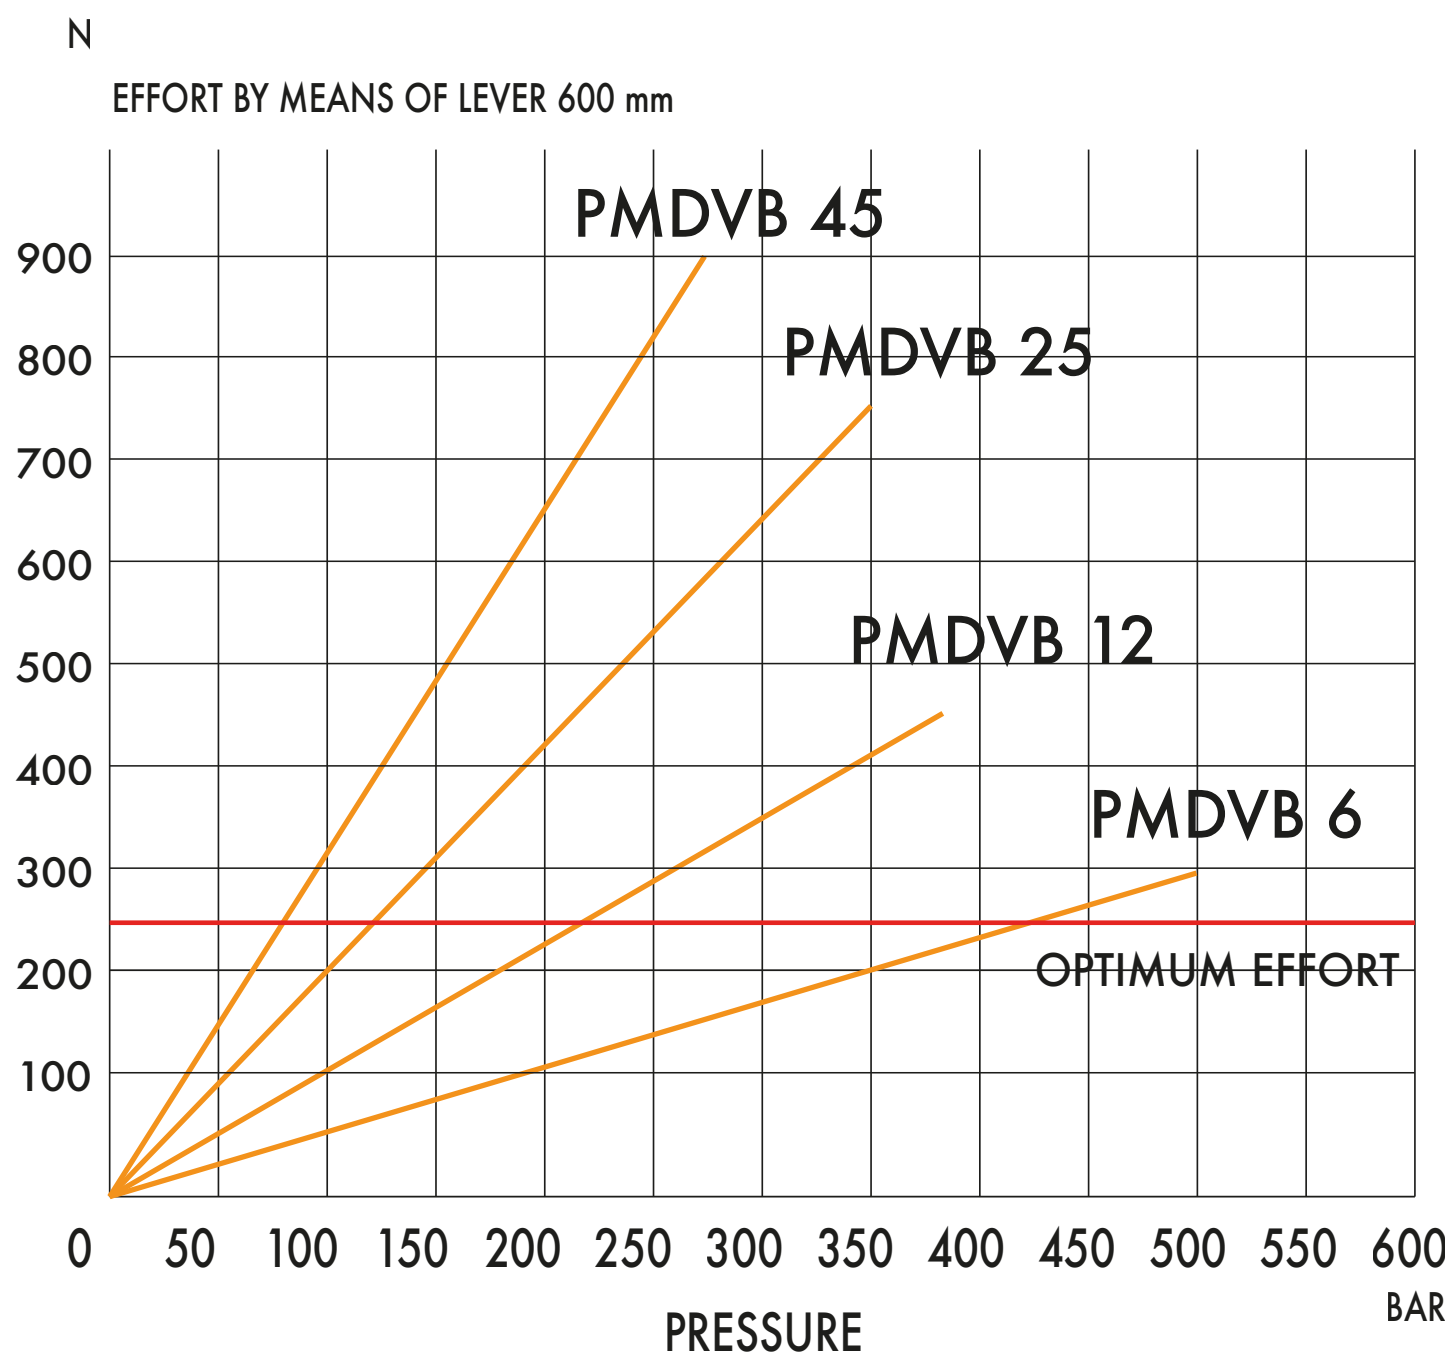

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
6	253	166	34	26	31	6,970	420	500	3,400	6059.0305
12	253	166	34	26	31	12,095	220	380	3,400	6060.0305
25	273	172	34	30	30	25,280	120	350	3,450	6061.0305
45	283	172	40	45	33	44,532	80	280	3,500	6062.0305

Hand pumps
 PMDVB 6-12-25-45 ca-byA-s
 Tech sheet


DETAILS

with 4/3 diverter opened centre
 with dual pilot check valve
 with brakes - with pressure relief valve double acting
 hand pump for a double acting cylinder for fixing to tank



SPECIFICATIONS

Cast iron body
 Piston treated with Niploy
 White zinc plated support lever
 Lever connection Ø 27
 White zinc plated external parts
 Standard colour black
 Oil tank mounting kit included
 With hydraulic brakes to operate under 50 bar pressure
 Pressure relief valve standard setting: 100 bar

HYDRAULIC DIAGRAM

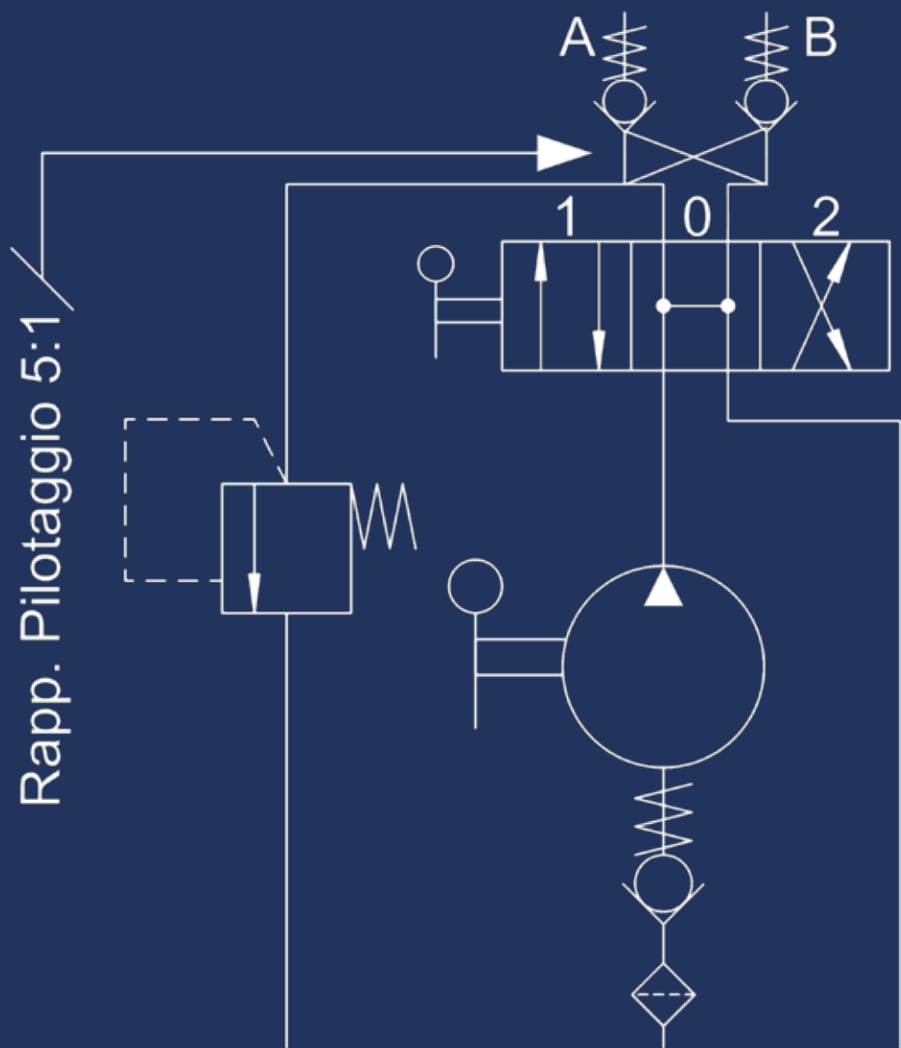

EFFORT DIAGRAM

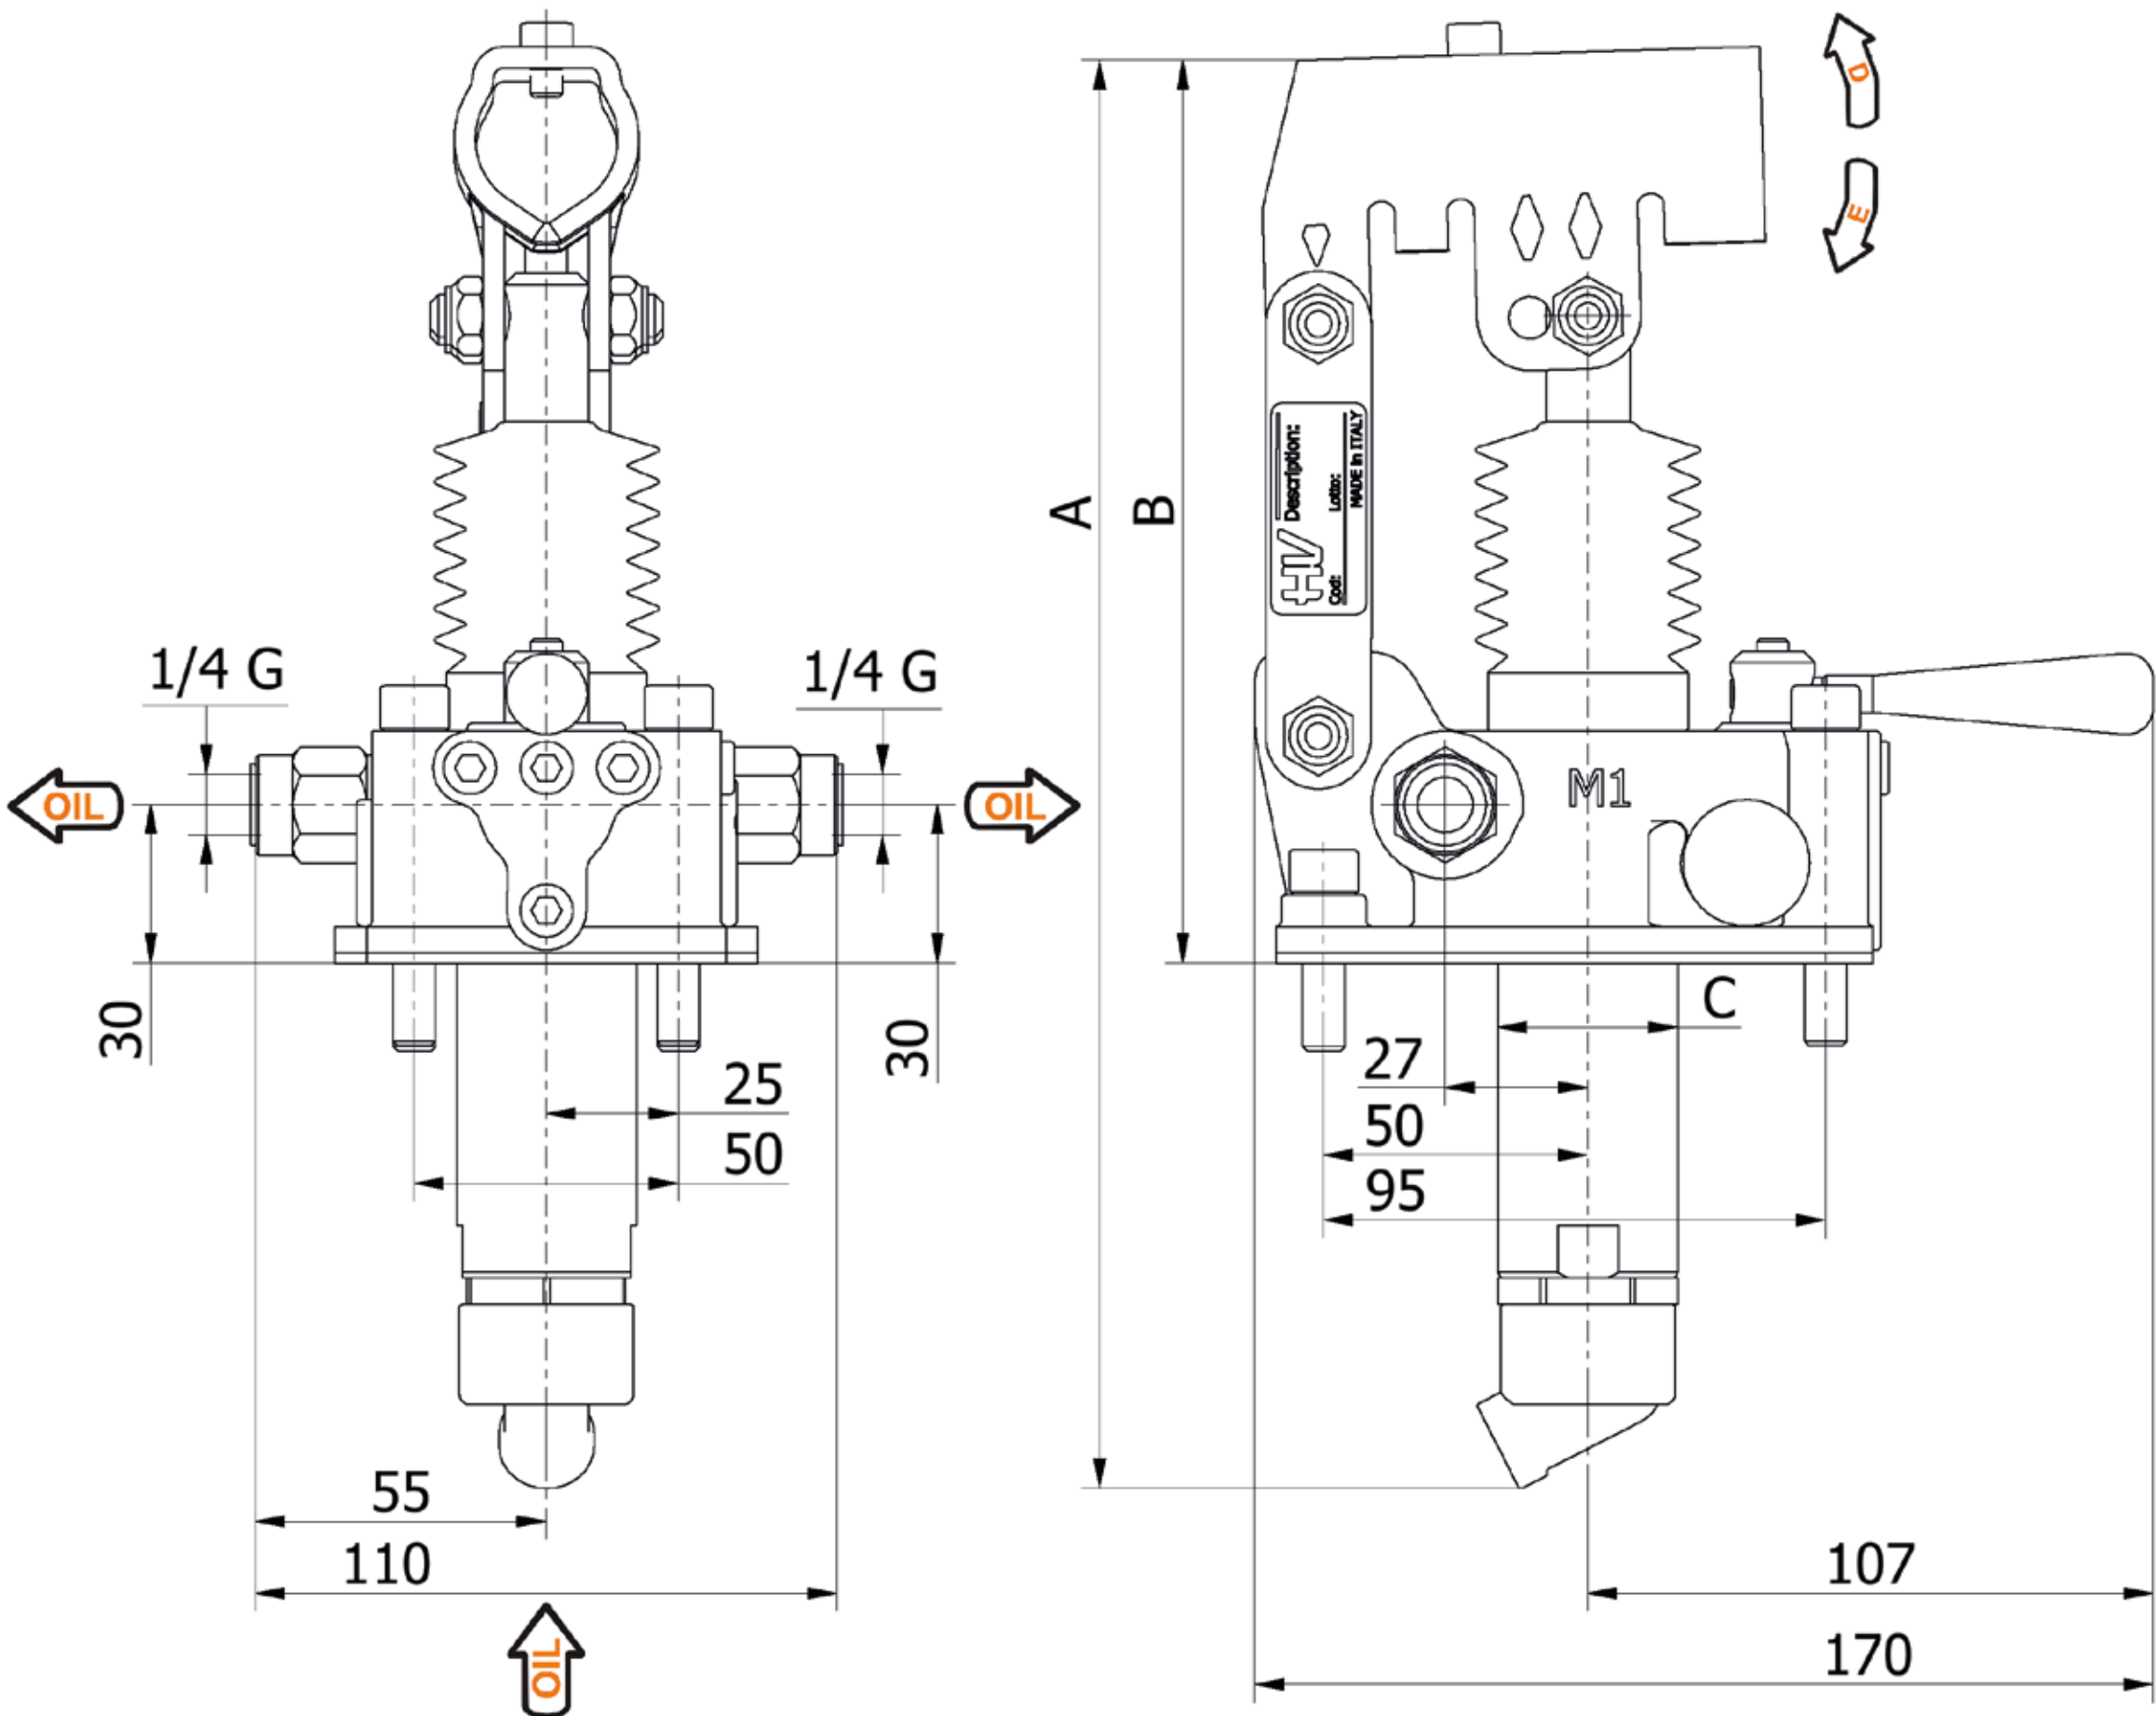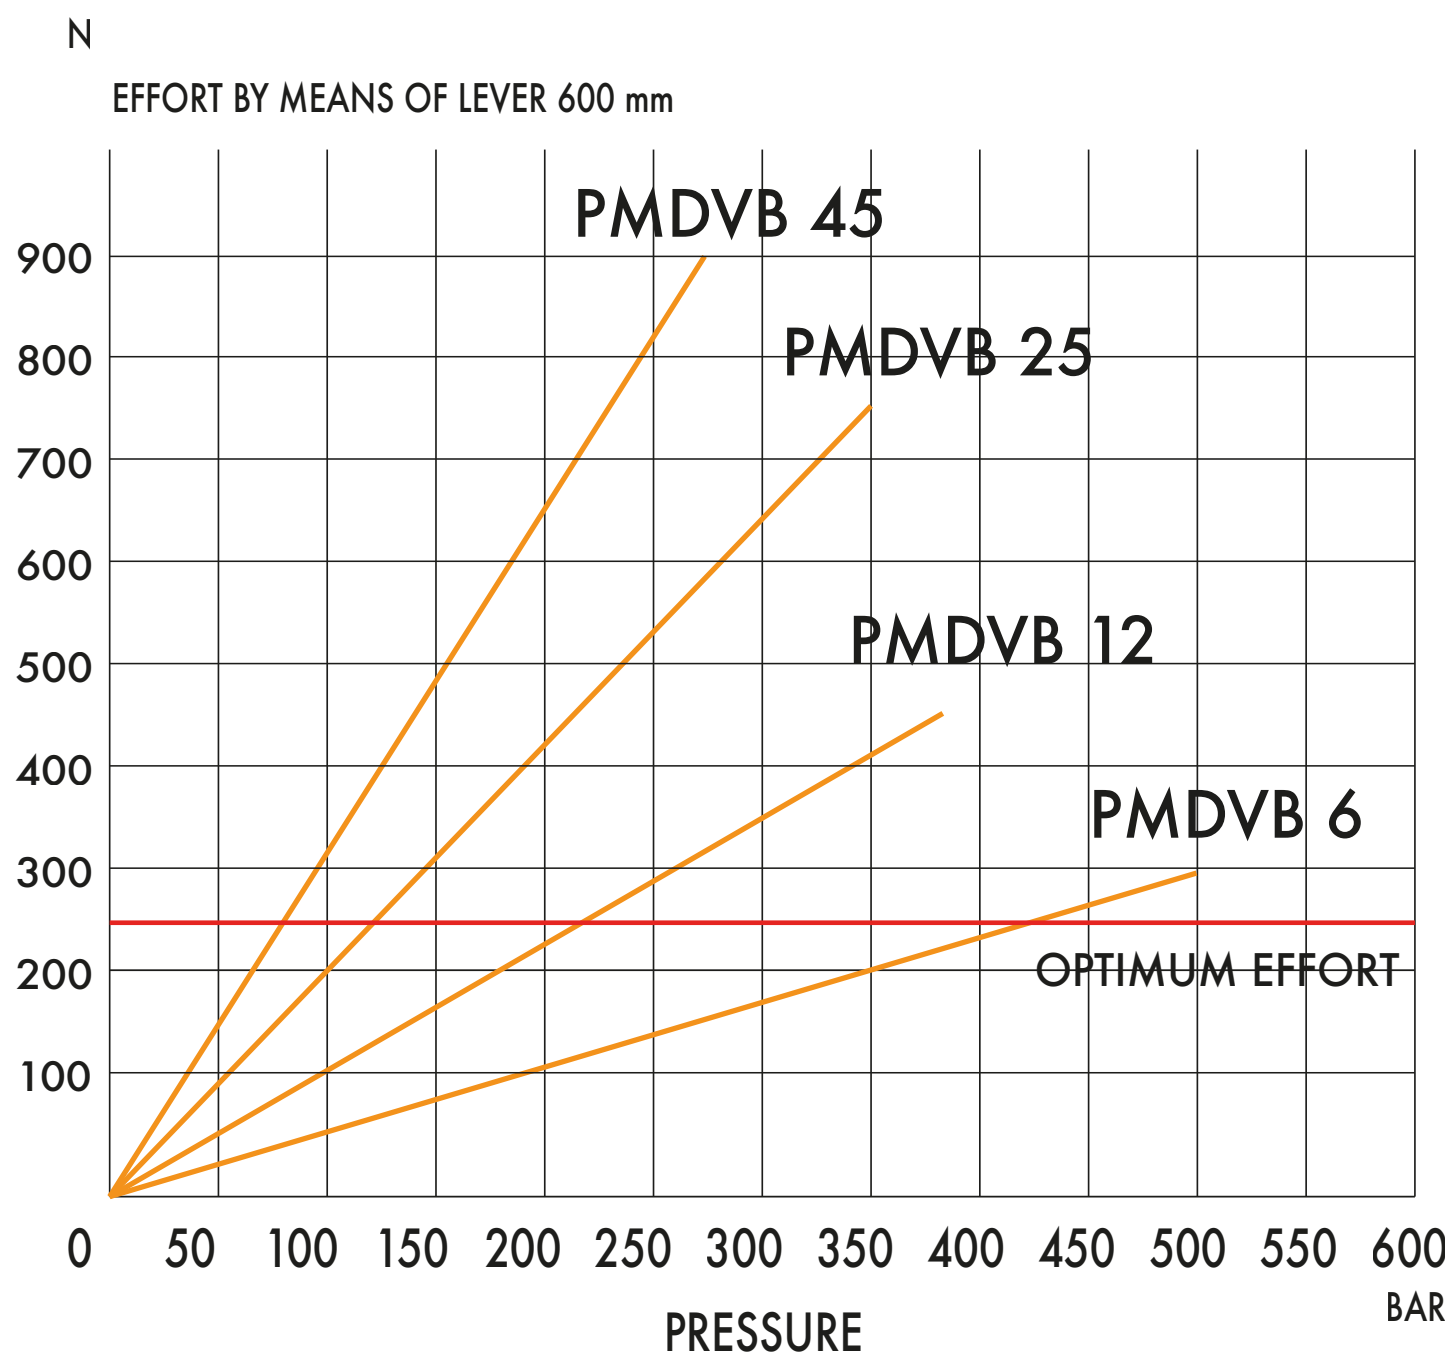

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
6	253	166	34	26	31	6,970	420	500	3,400	6059.0307
12	253	166	34	26	31	12,095	220	380	3,400	6060.0307
25	273	172	34	30	30	25,280	120	350	3,450	6061.0307
45	283	172	40	45	33	44,532	80	280	3,500	6062.0307