

Hand pumps

PMO 50 s

Tech sheet



DETAILS

with release hand knob
double acting hand pump for single acting cylinder
for fixing to wall



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black

HYDRAULIC DIAGRAM

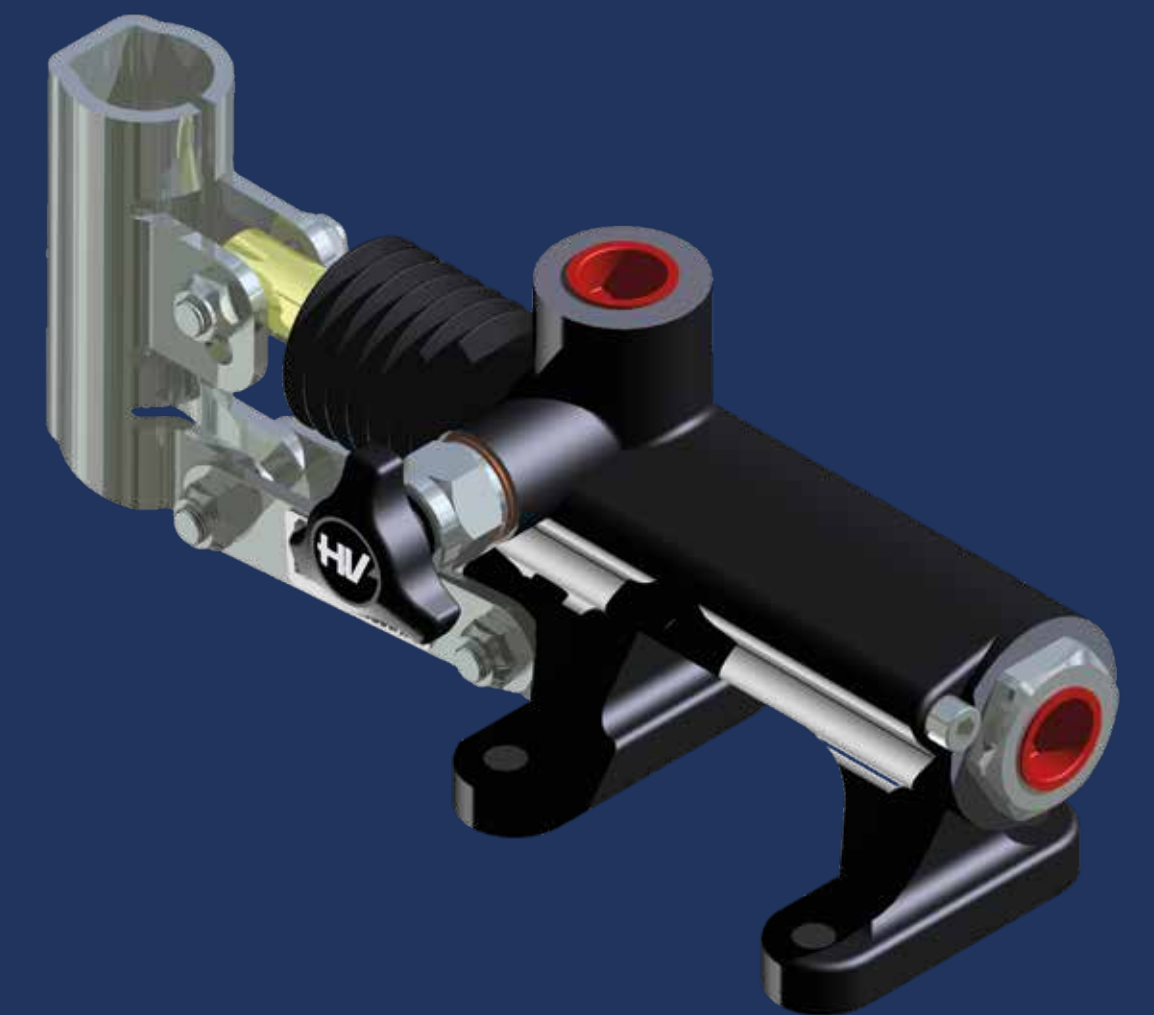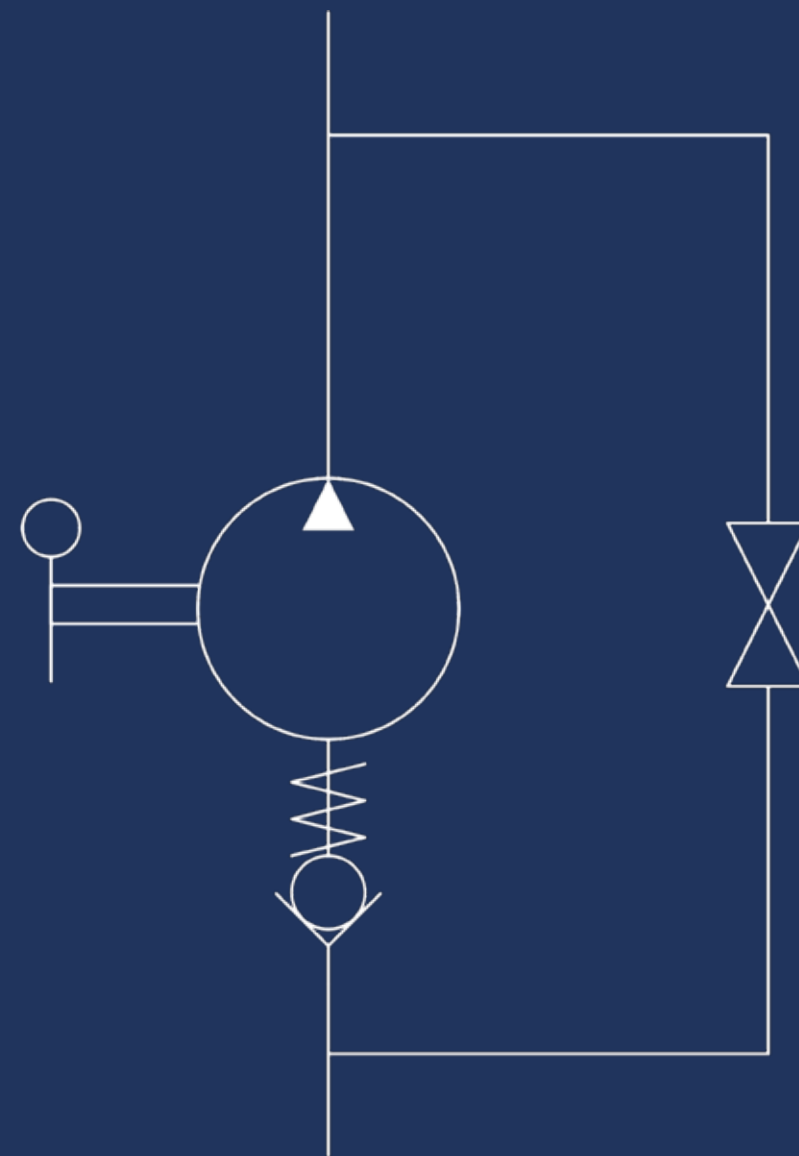

EFFORT DIAGRAM

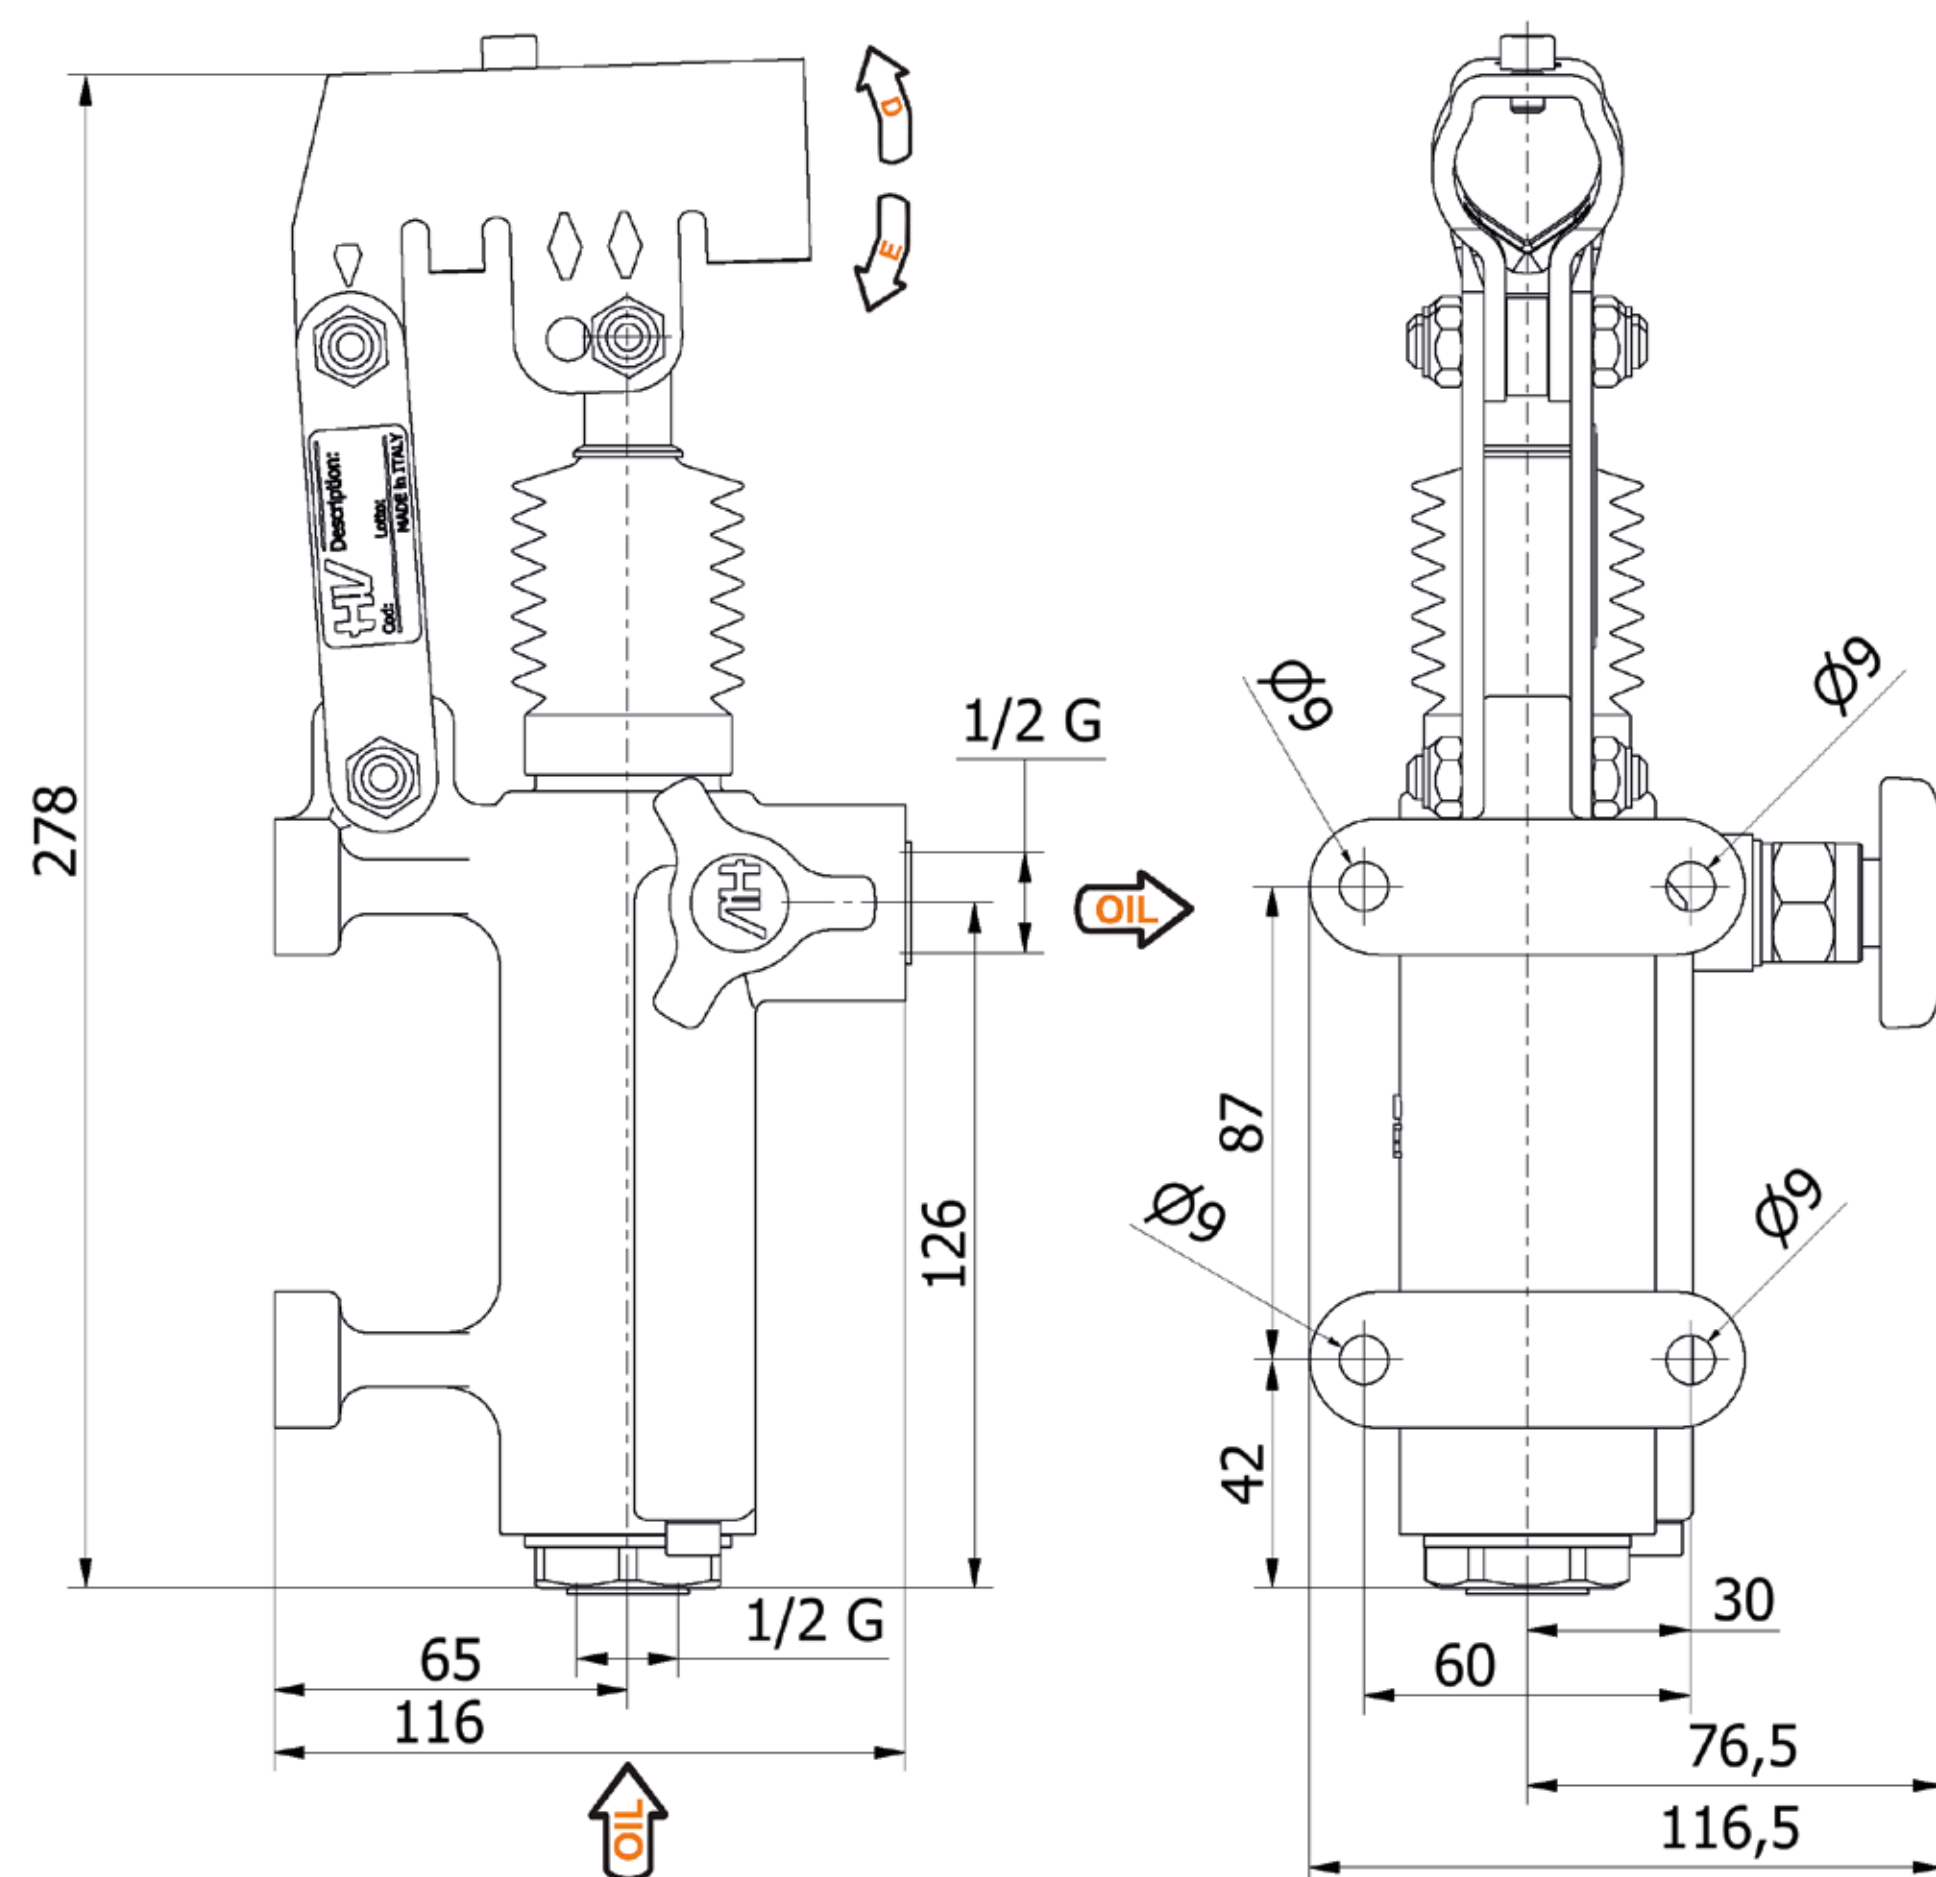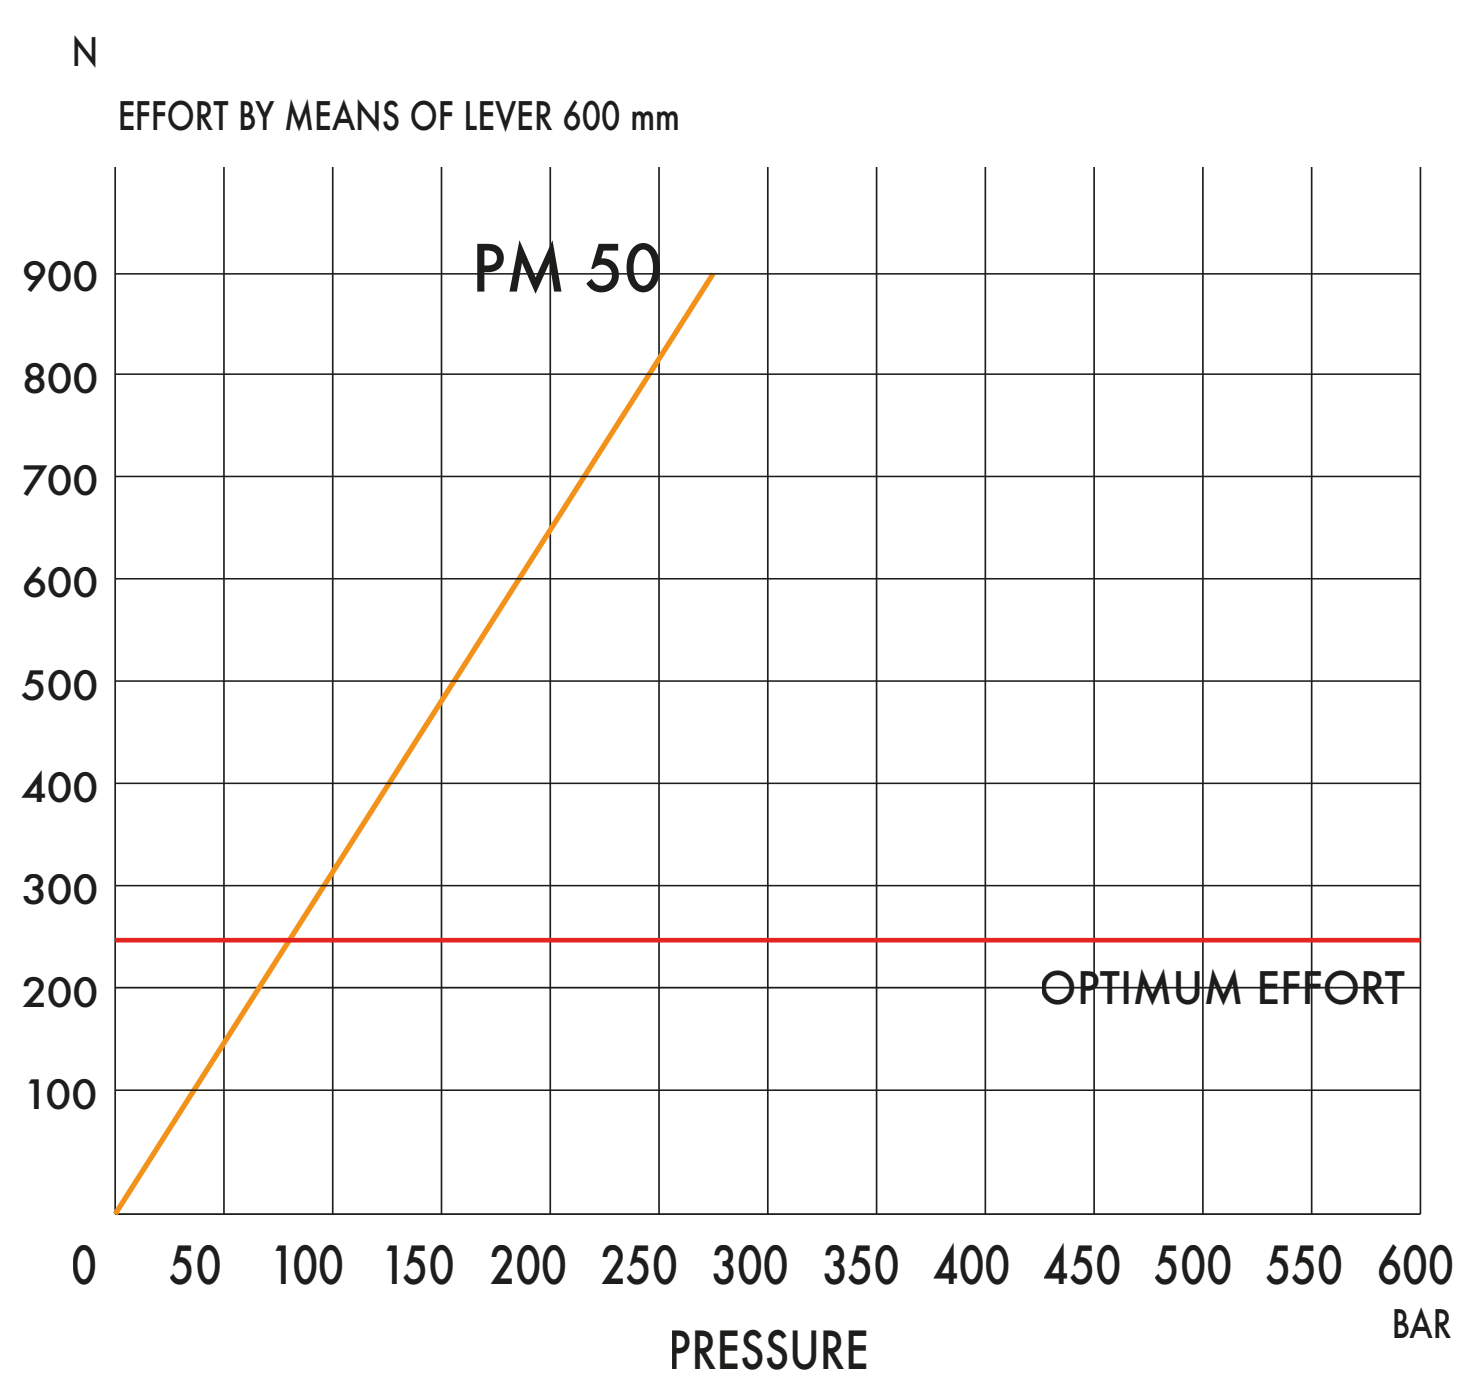[illegible]

Hand pumps

PMO 50 e-s

Tech sheet



DETAILS

without release hand knob
double acting hand pump for single acting cylinder
for fixing to wall



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black

HYDRAULIC DIAGRAM

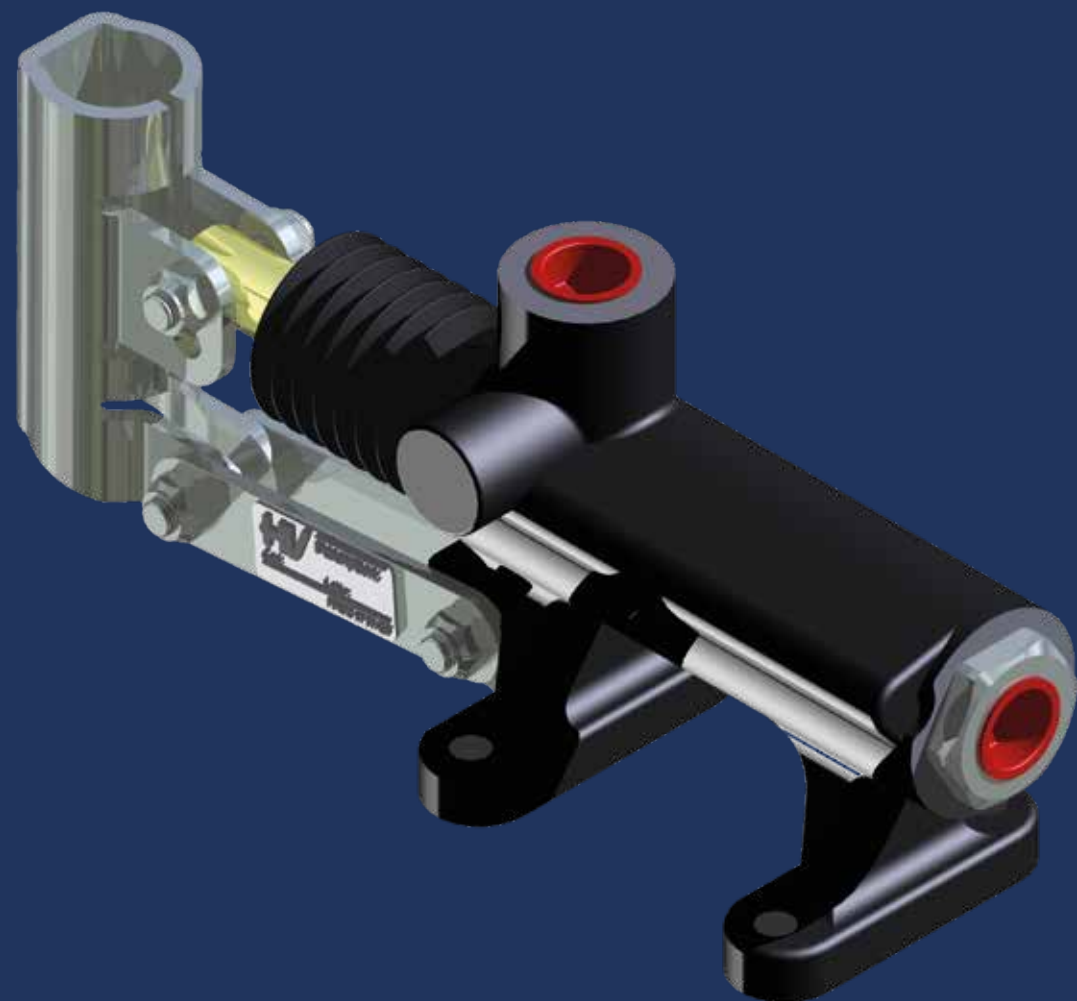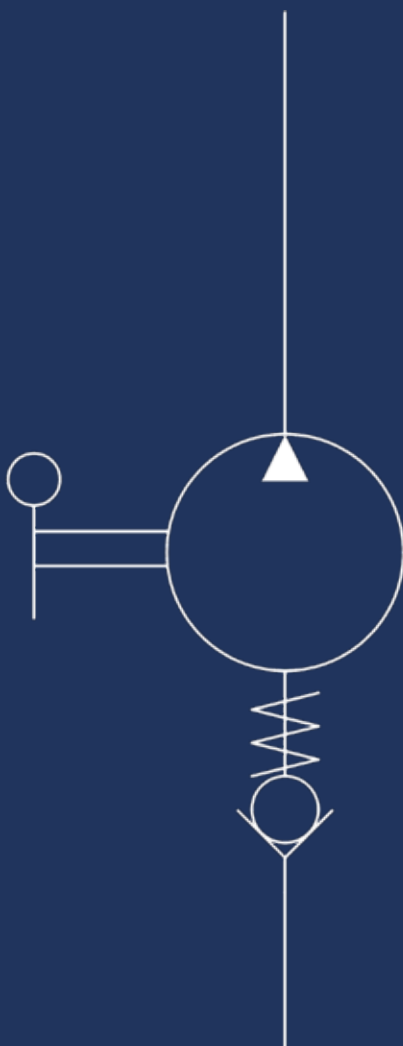

EFFORT DIAGRAM

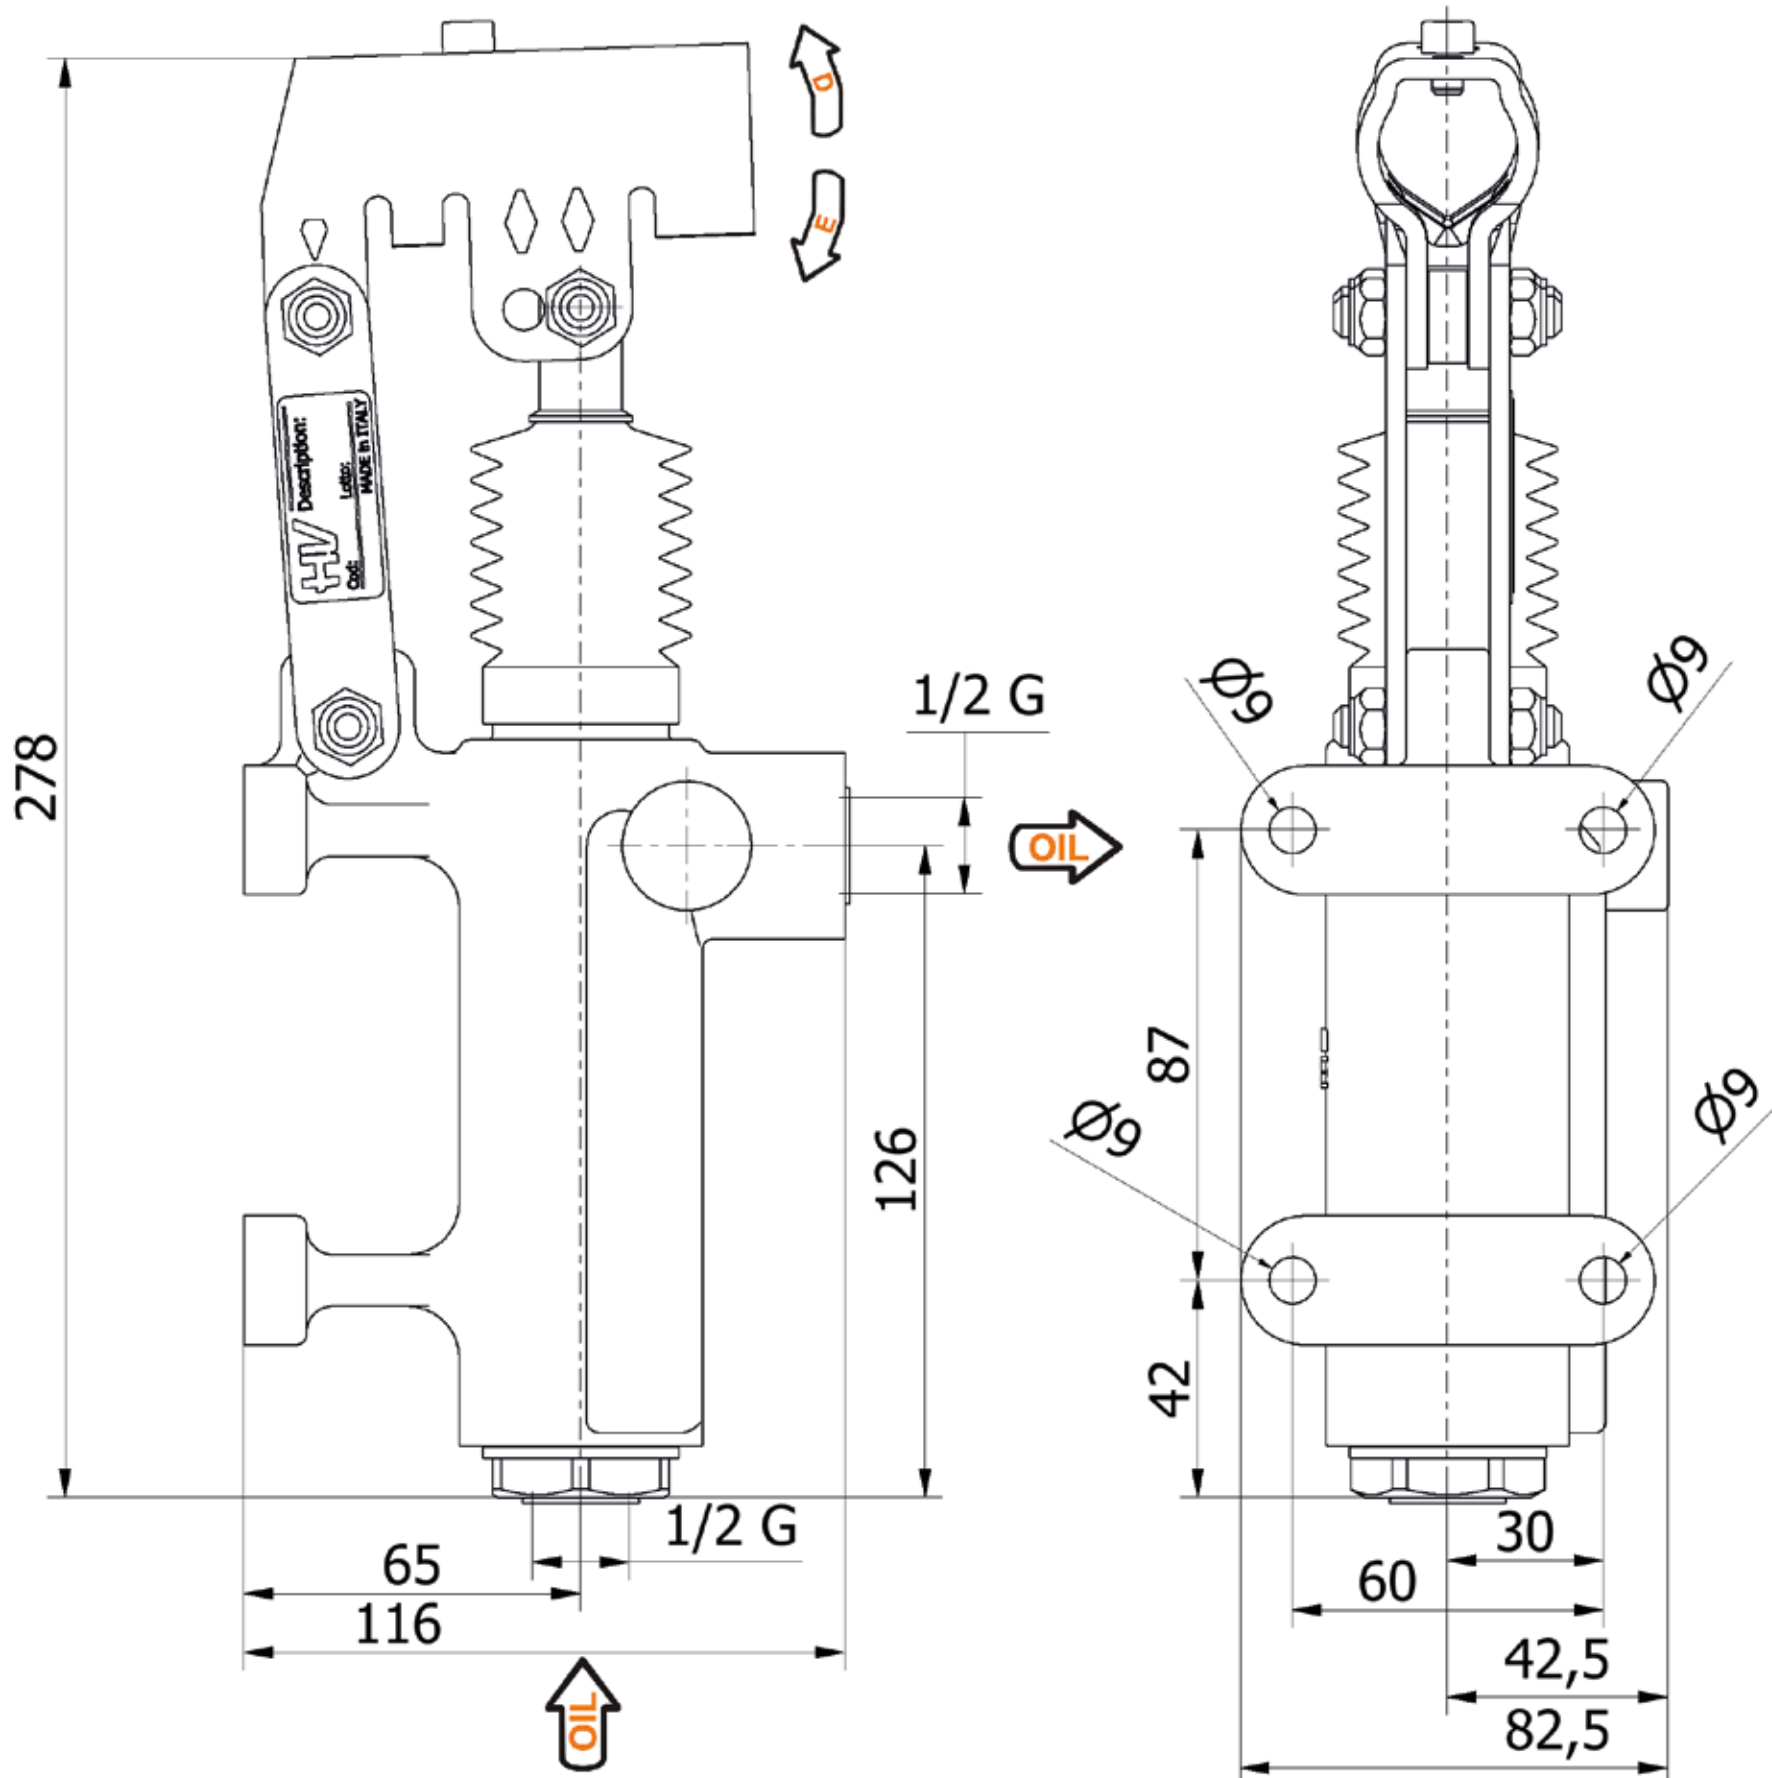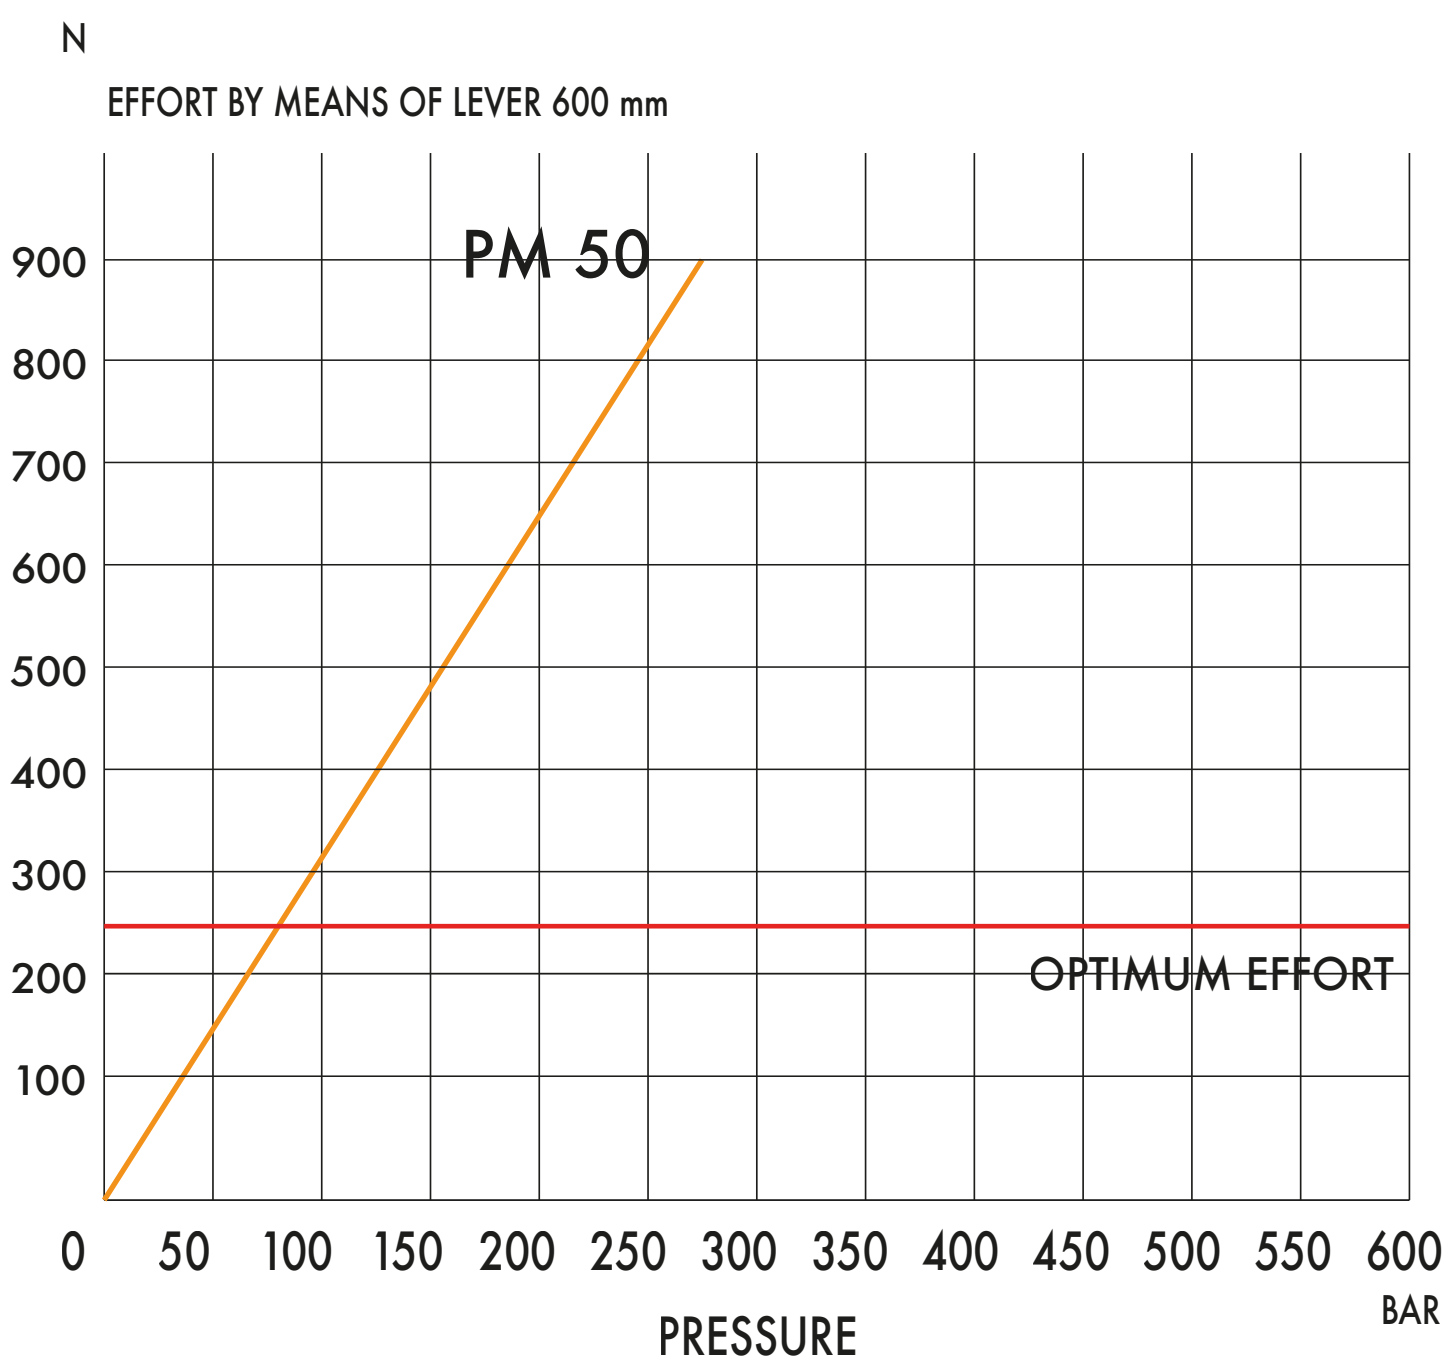

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
50	--	--	--	38	37	43,825	80	280	3,400	6077.0033

Hand pumps

PMO 50 m-s

Tech sheet


DETAILS

with normally closed manipulator
double acting hand pump for single acting cylinder
for fixing to wall



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black

HYDRAULIC DIAGRAM

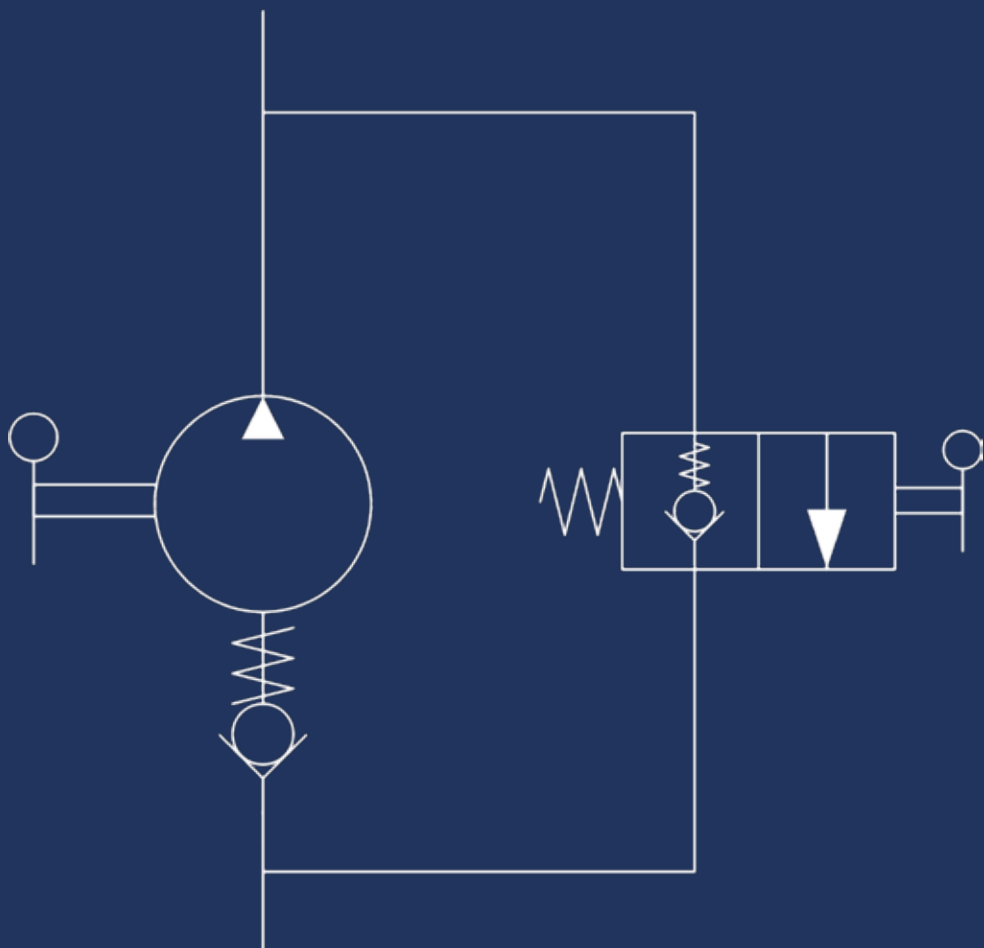

EFFORT DIAGRAM

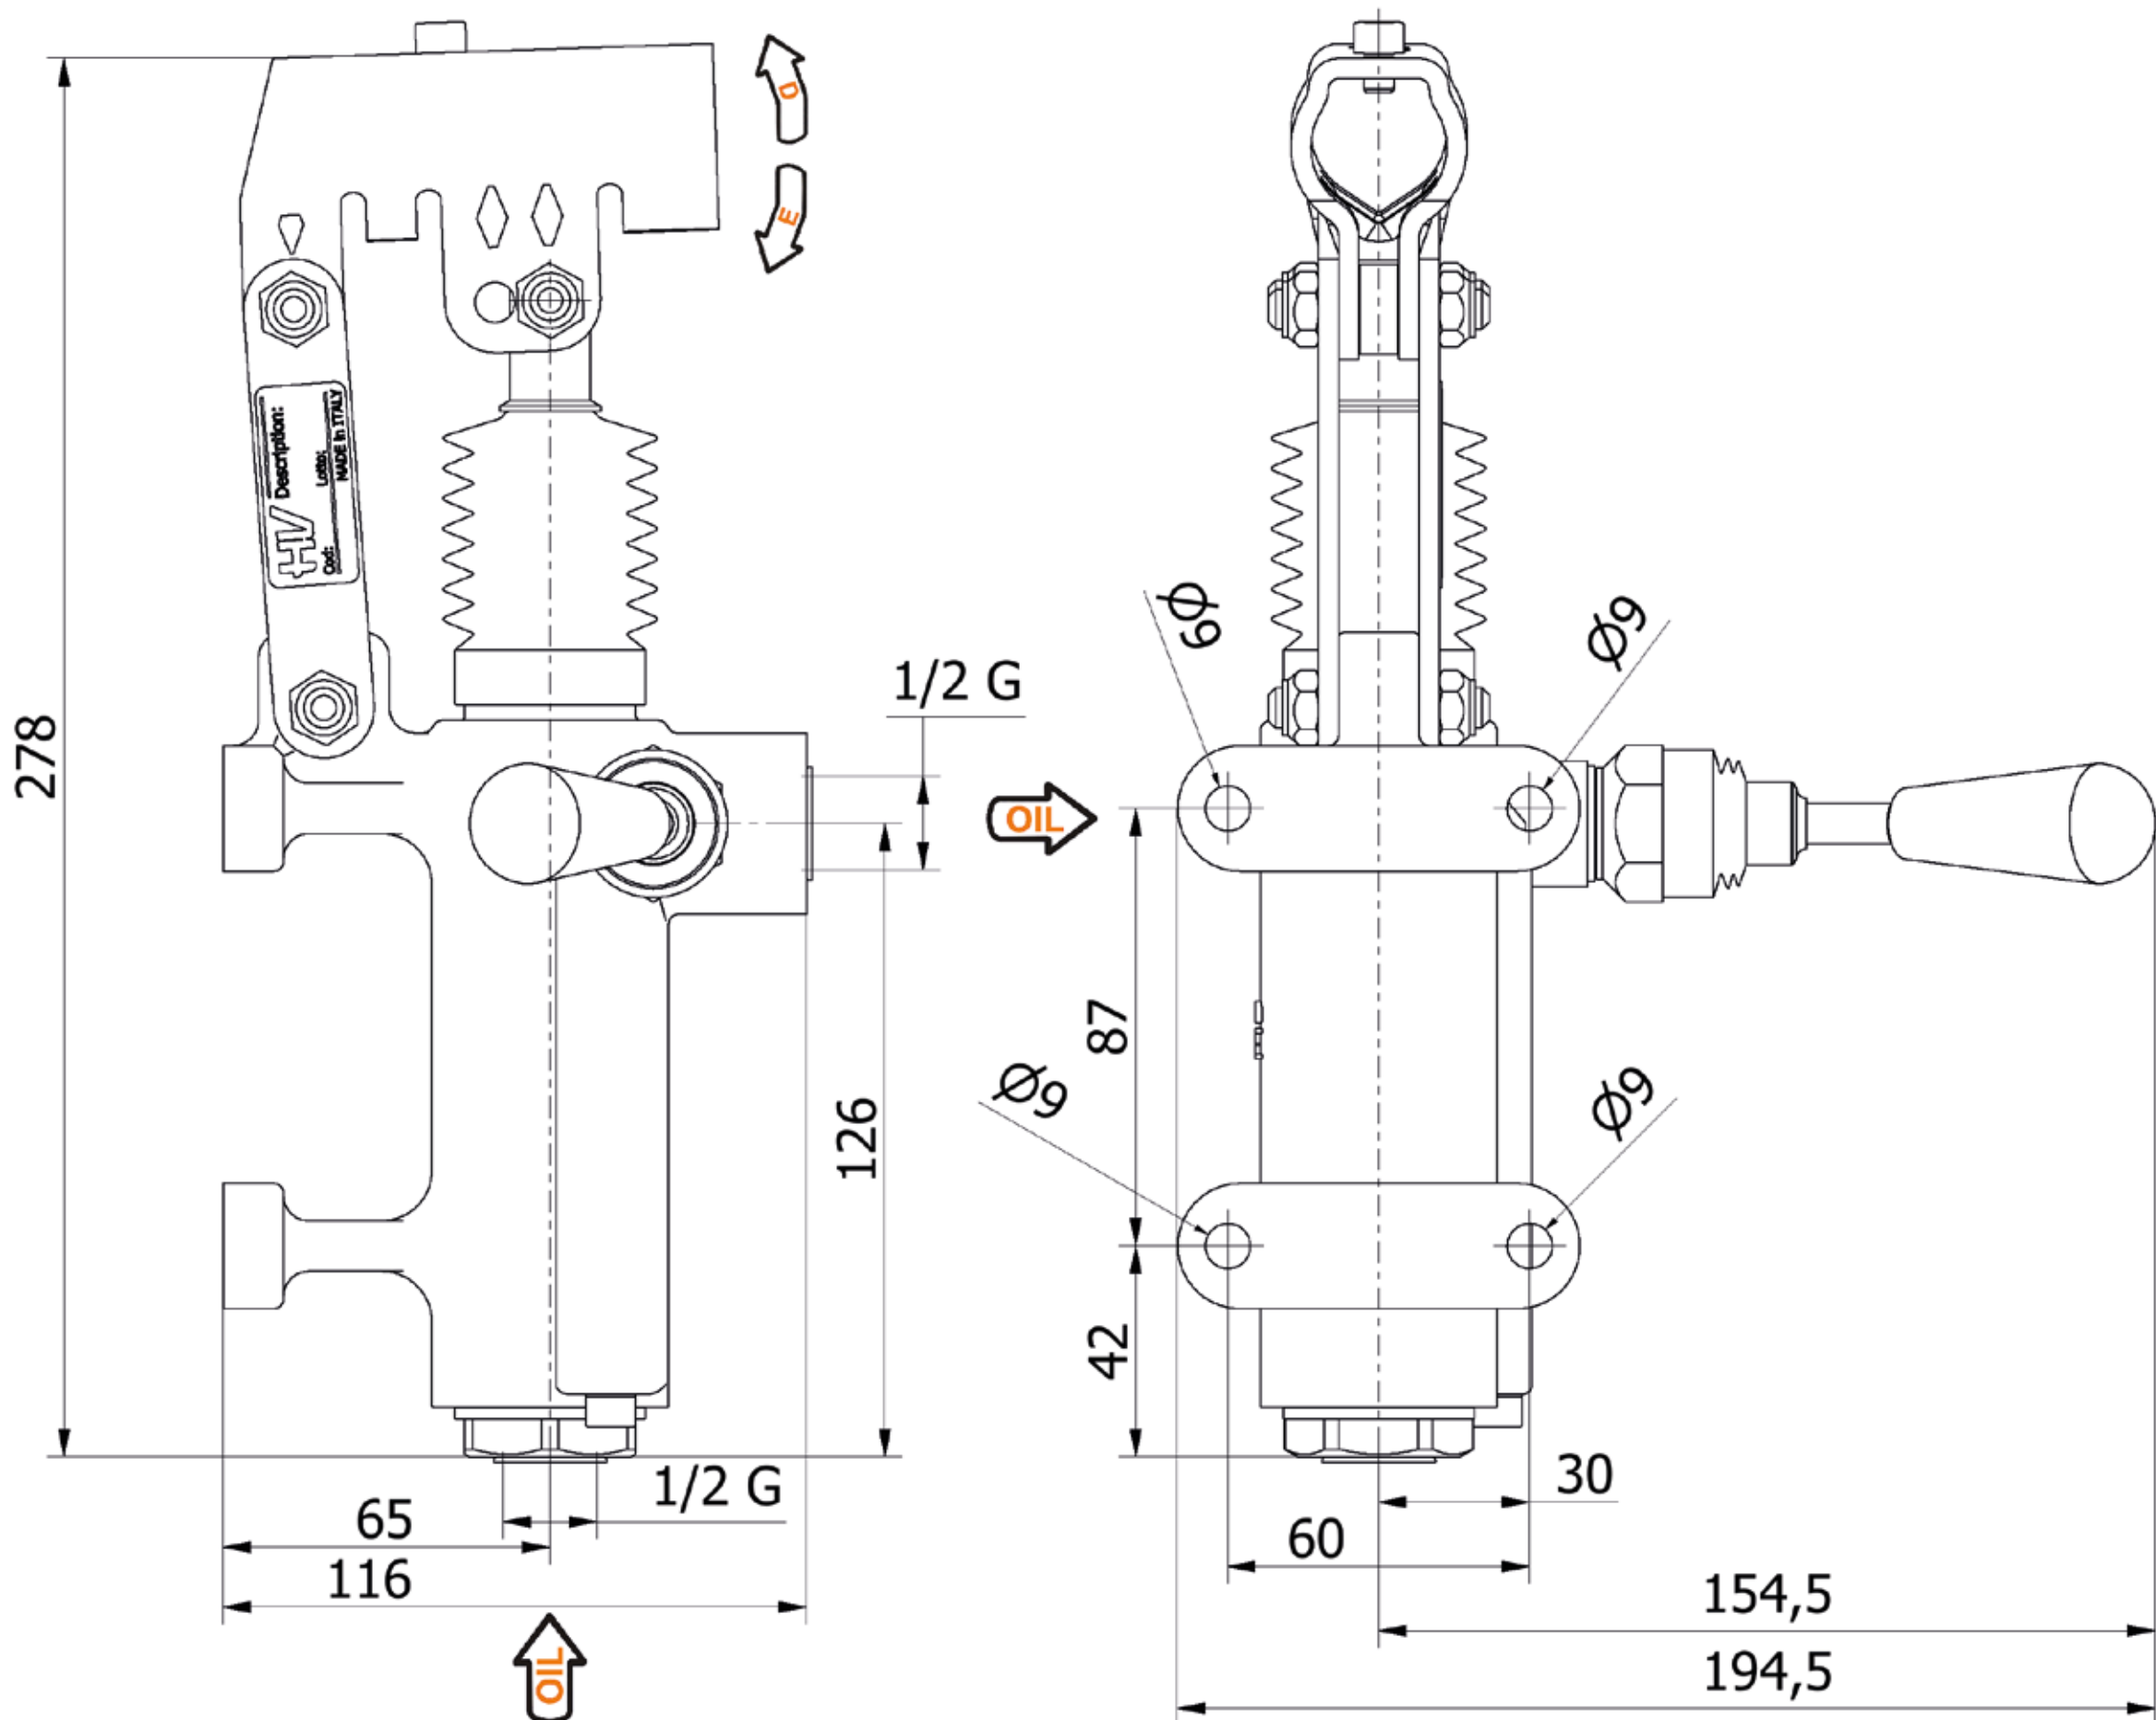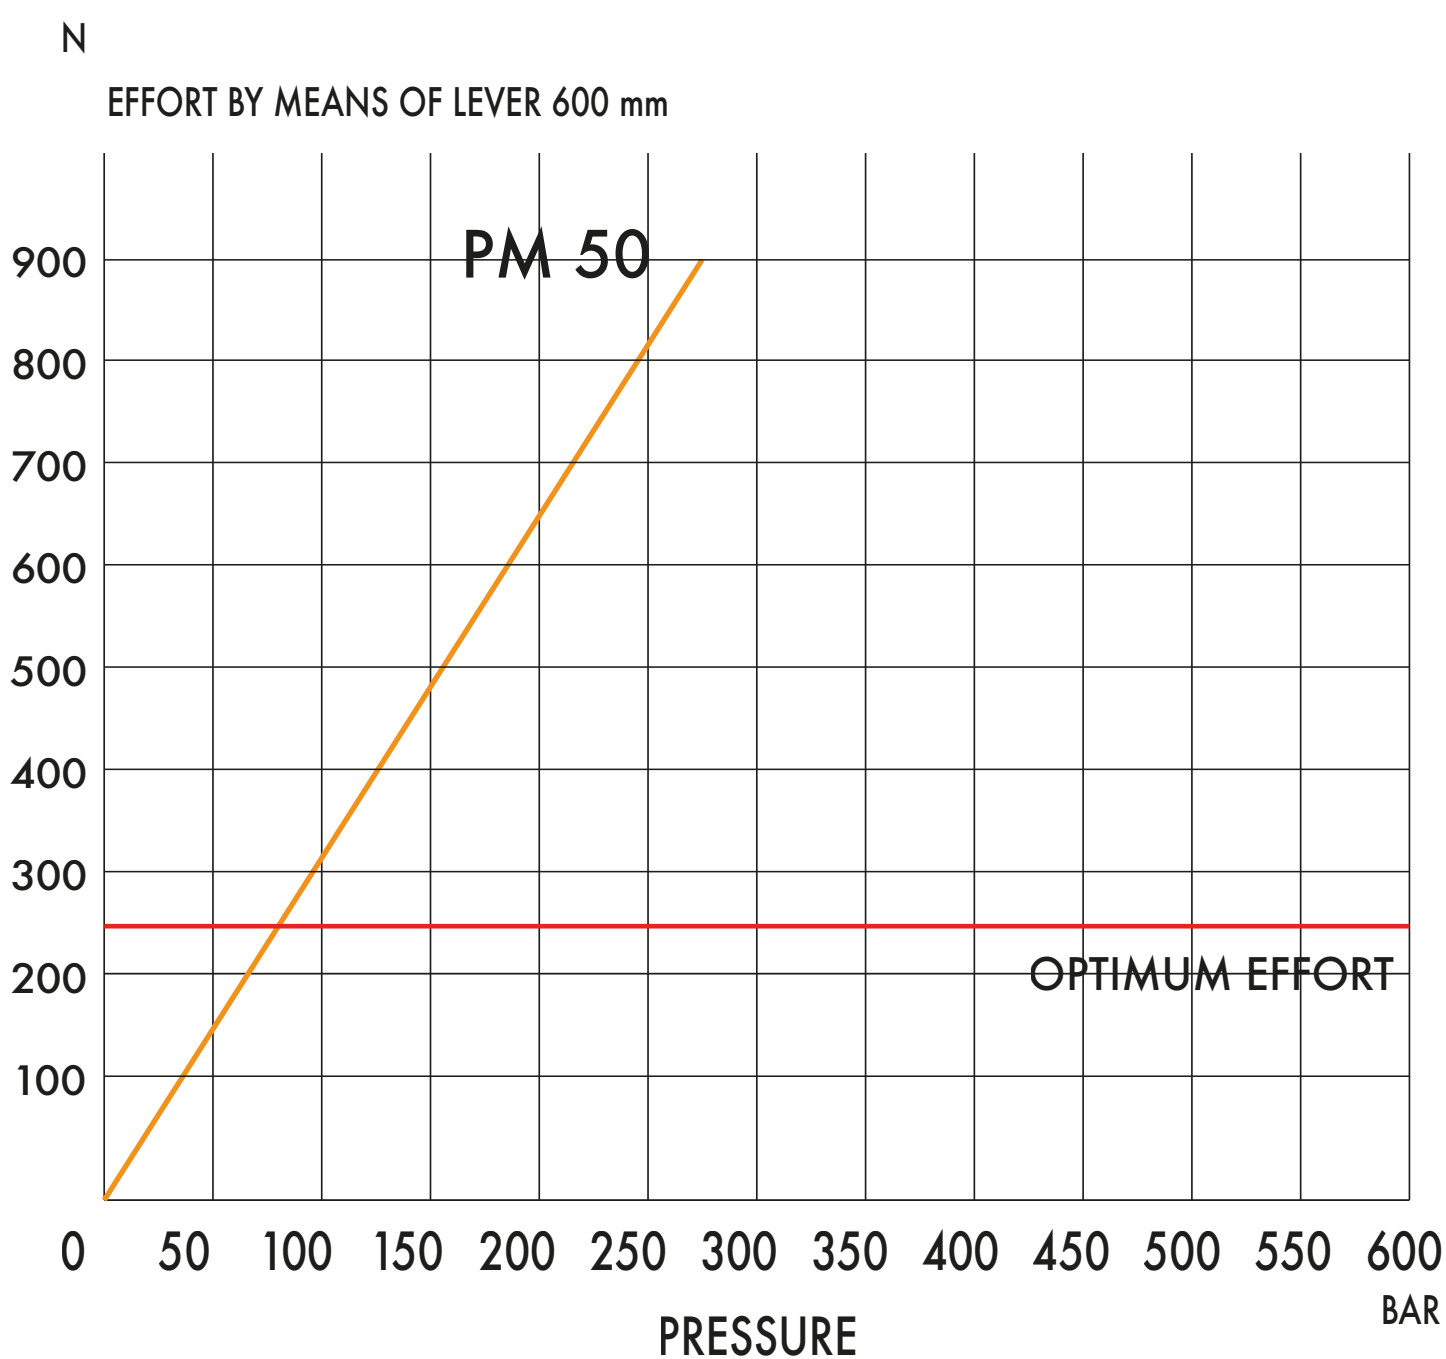

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
50	--	--	--	38	37	43,825	80	280	3,400	6077.0034

Hand pumps

PMO 50 L-s

Tech sheet



DETAILS

with release lever
double acting hand pump for single acting cylinder
for fixing to wall



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black

HYDRAULIC DIAGRAM

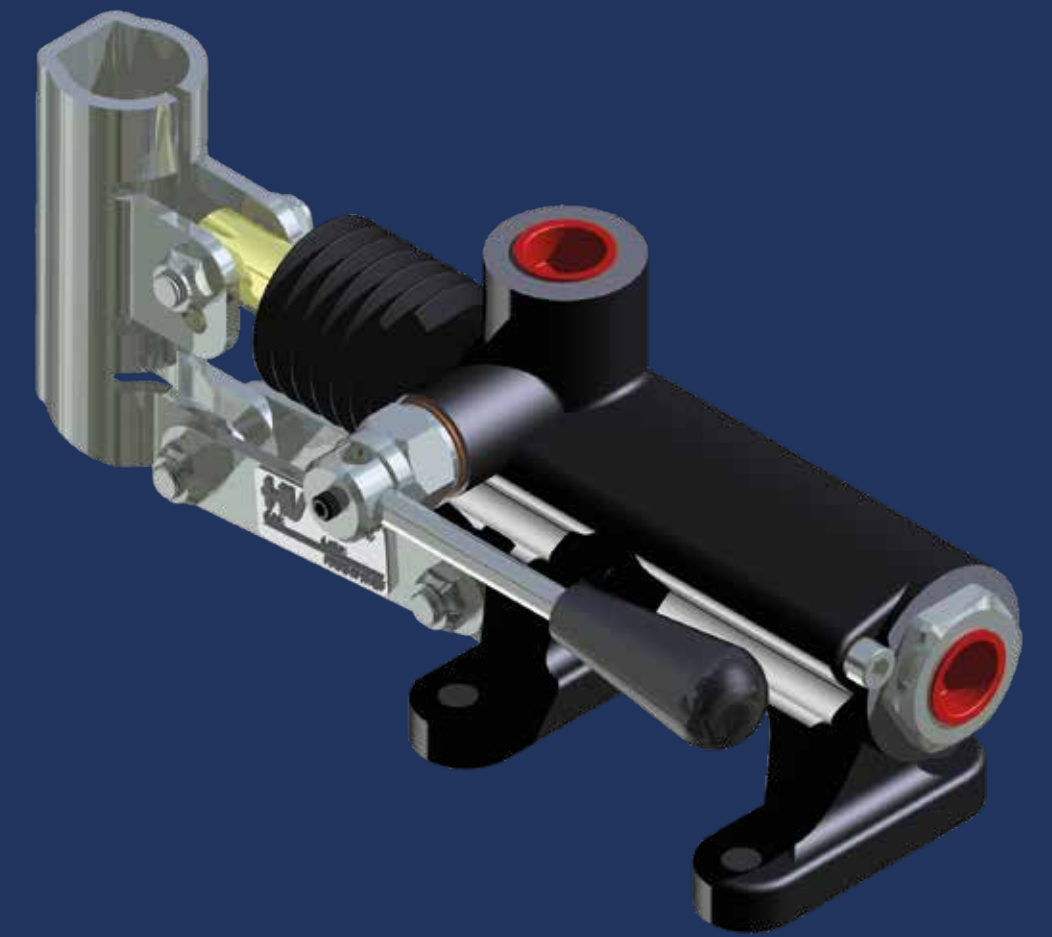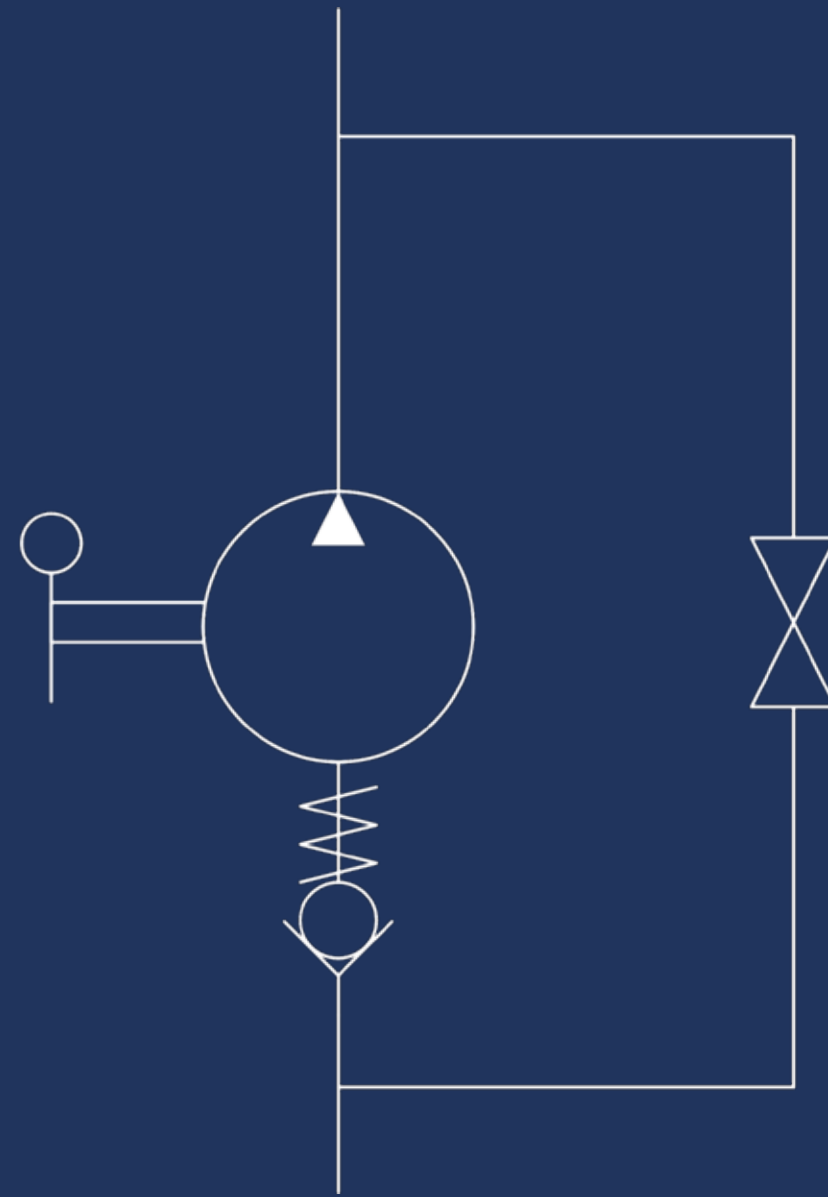

EFFORT DIAGRAM

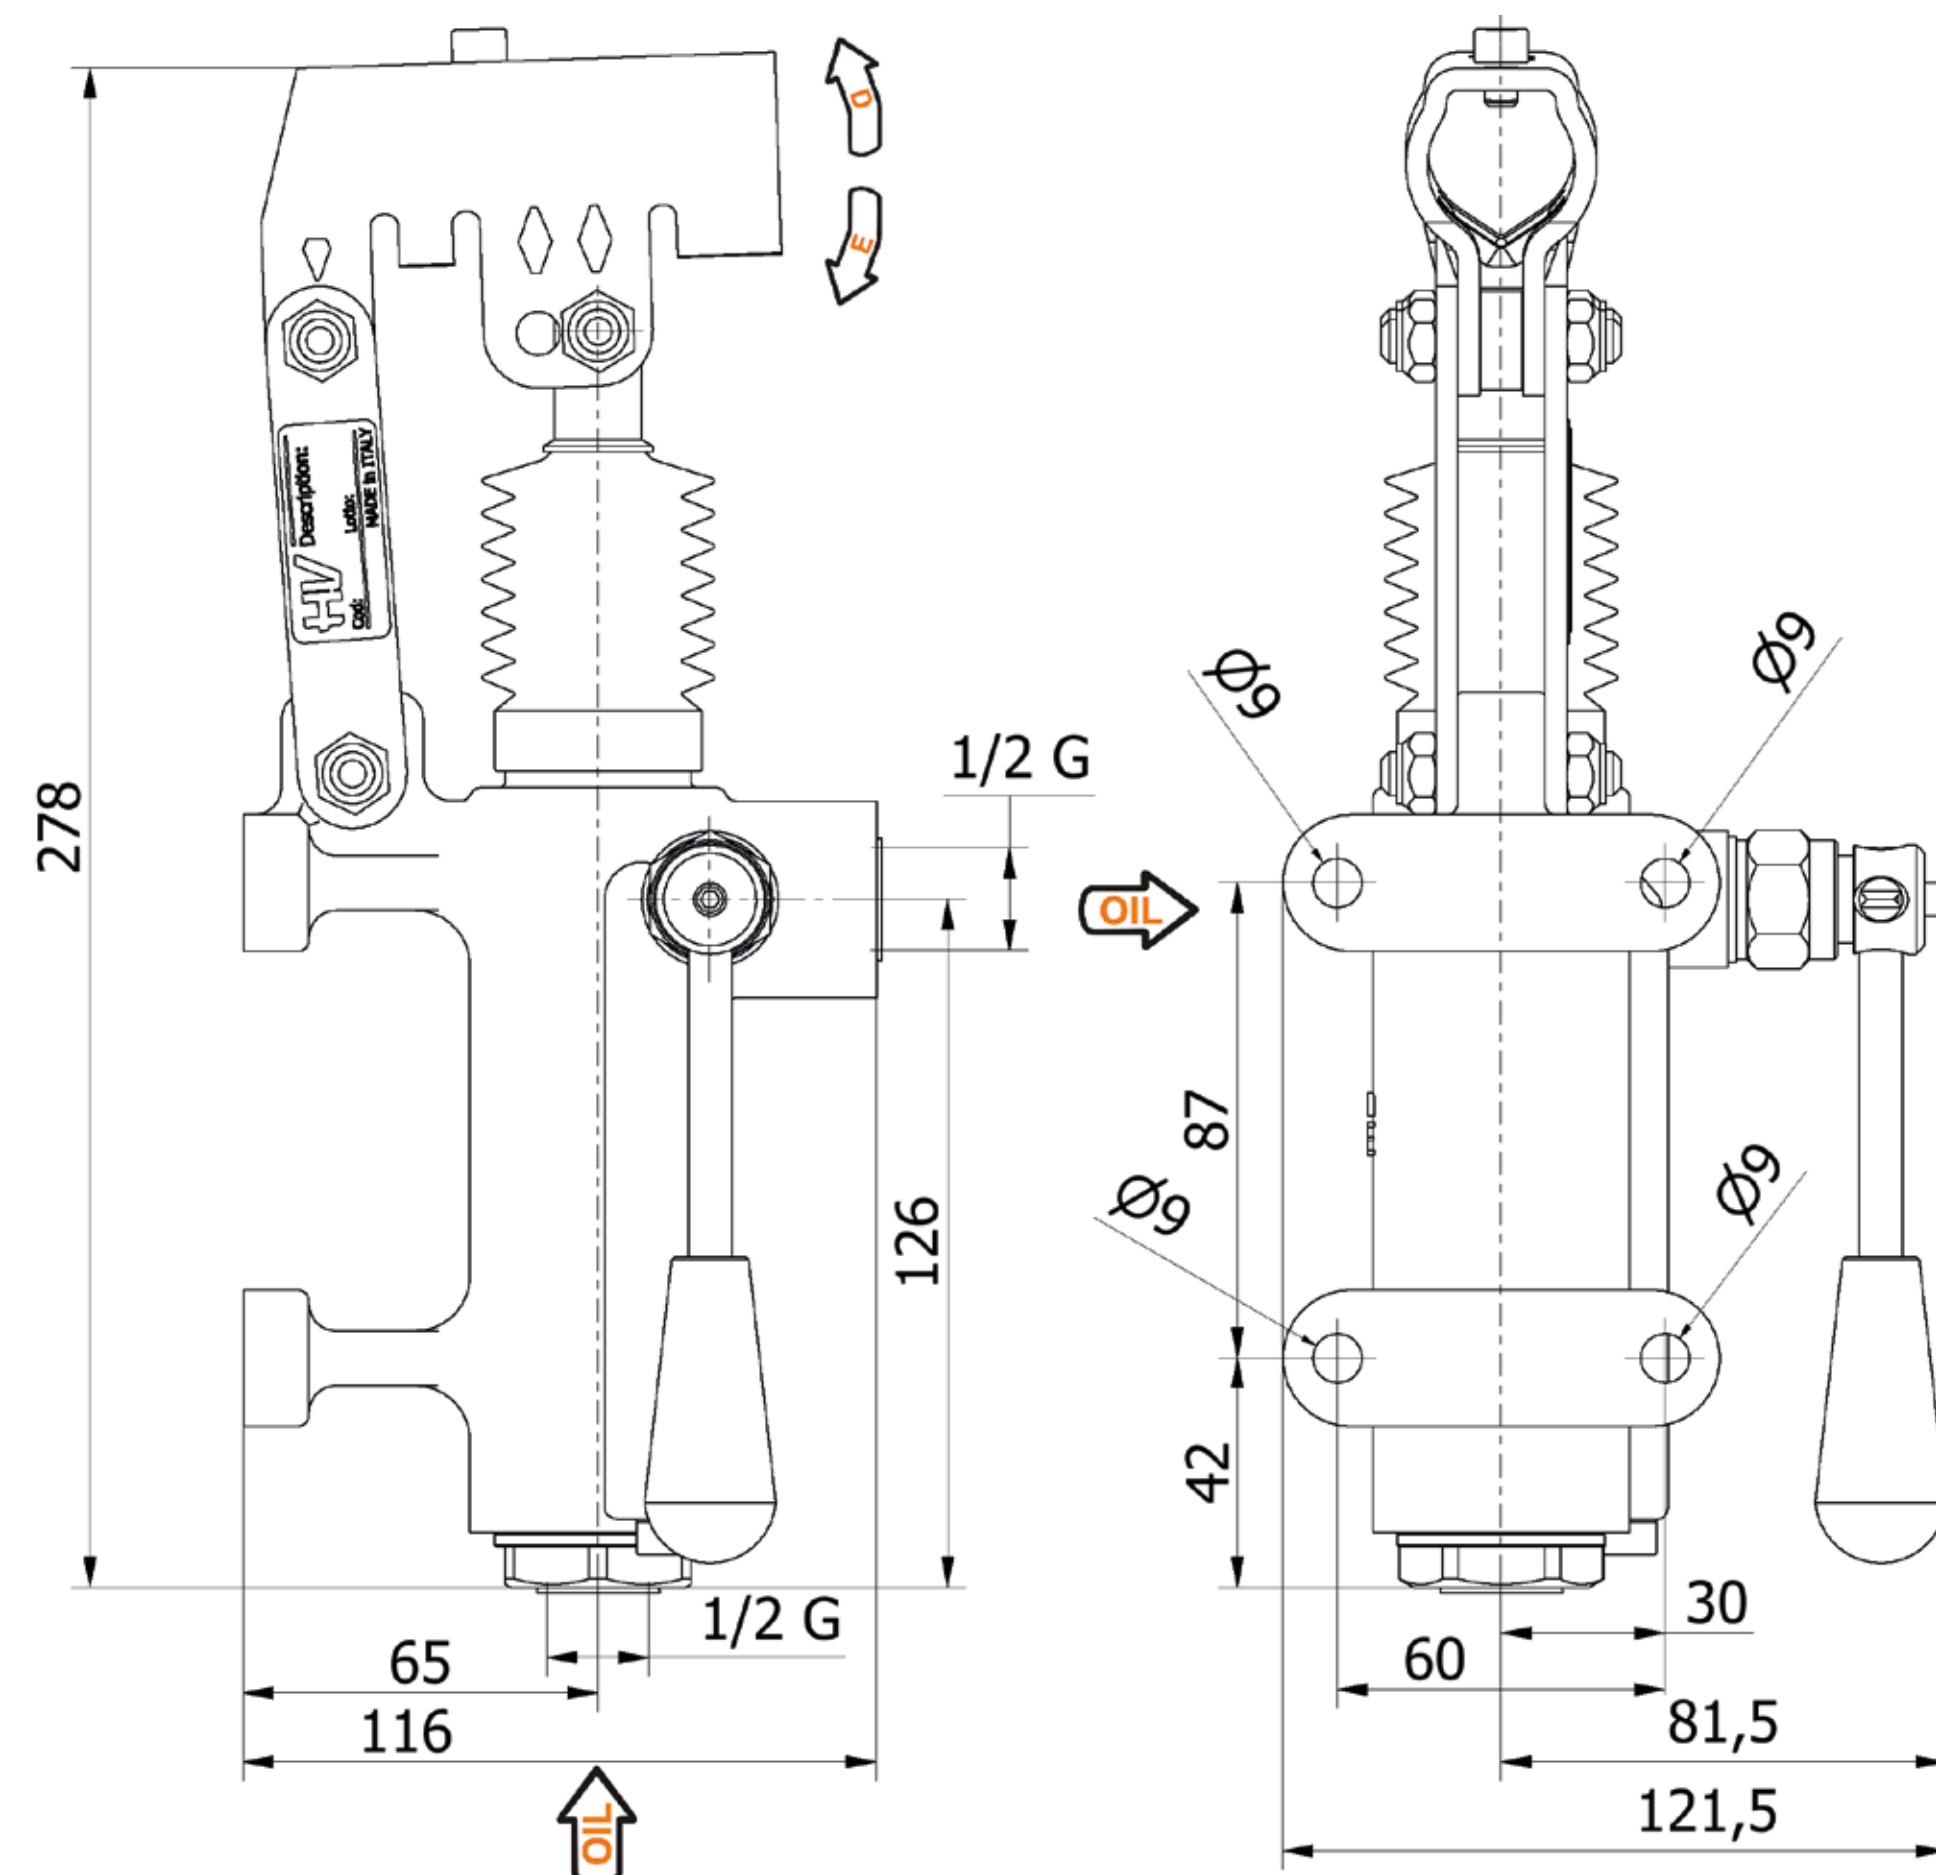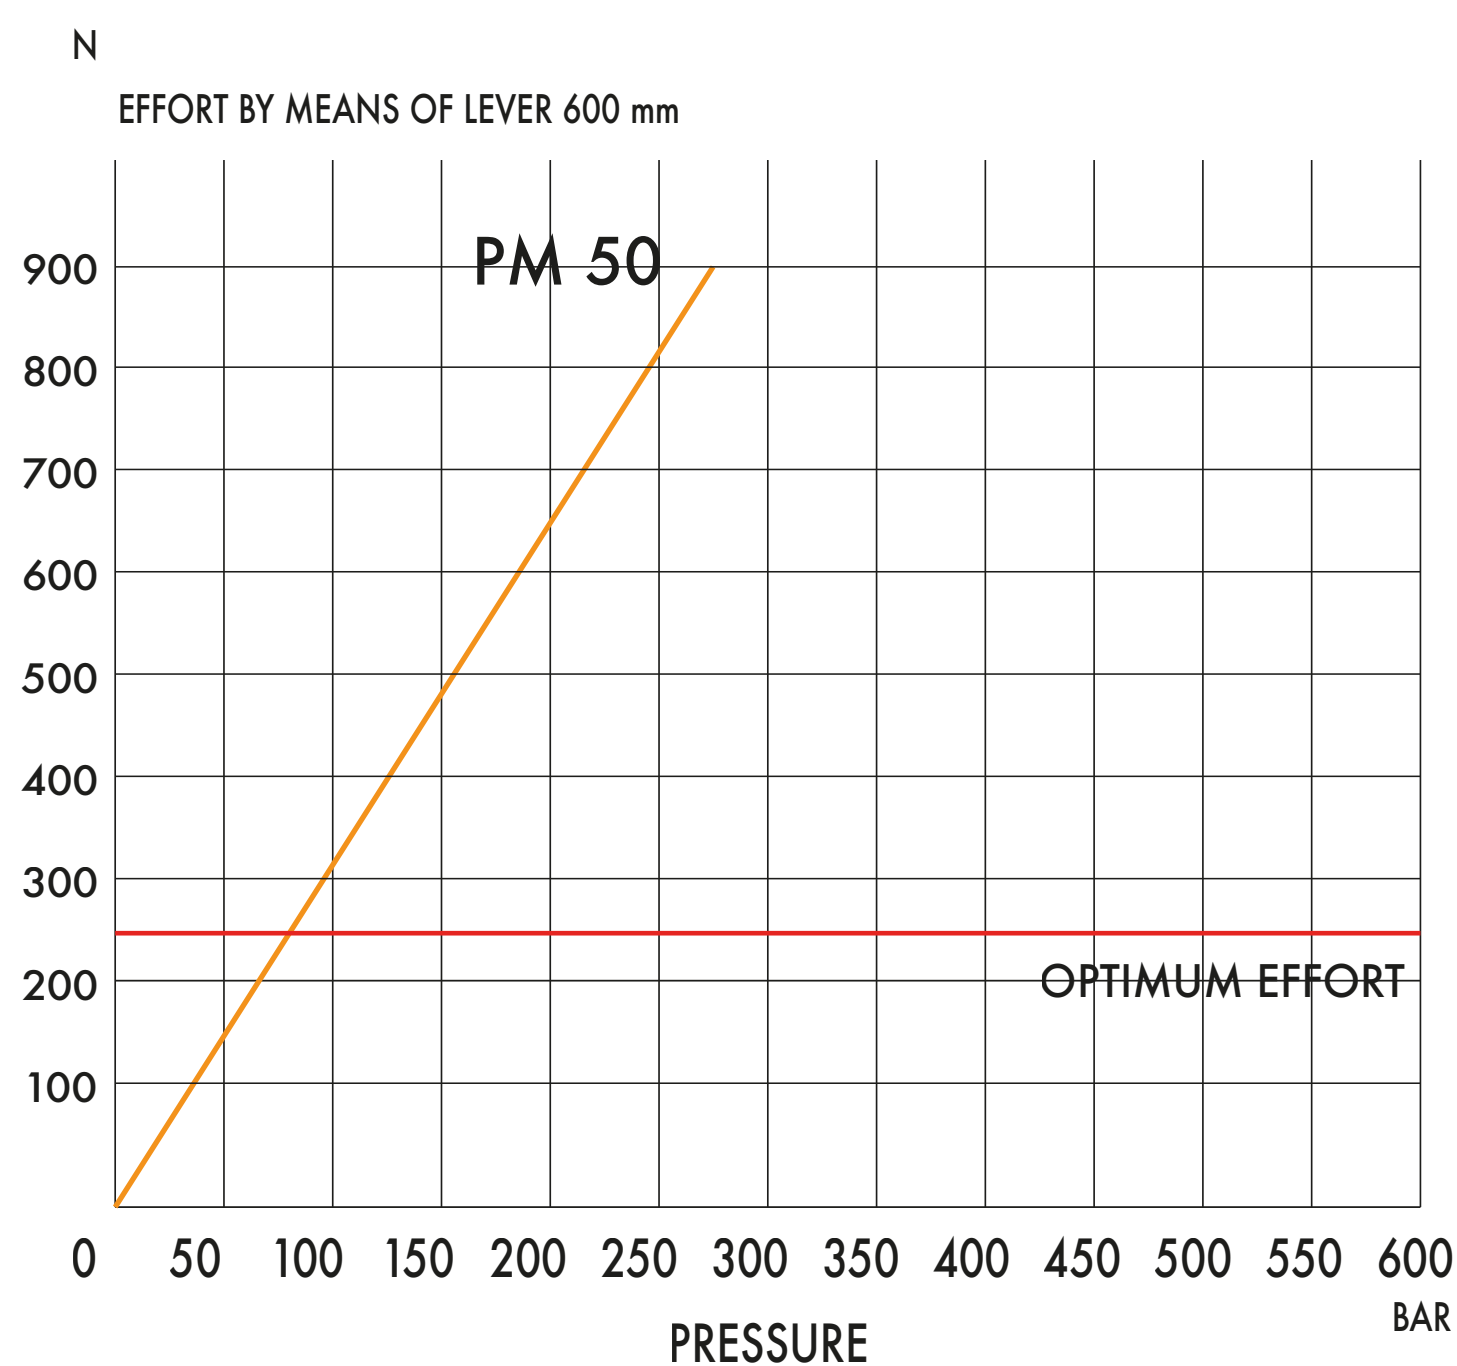[illegible]

Hand pumps

PMO 50 byB-e-s

Tech sheet



DETAILS

- without release hand knob
- with pressure relief valve
- double acting hand pump for single acting cylinder
- for fixing to wall



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Pressure relief valve standard
setting: 100 bar

HYDRAULIC DIAGRAM

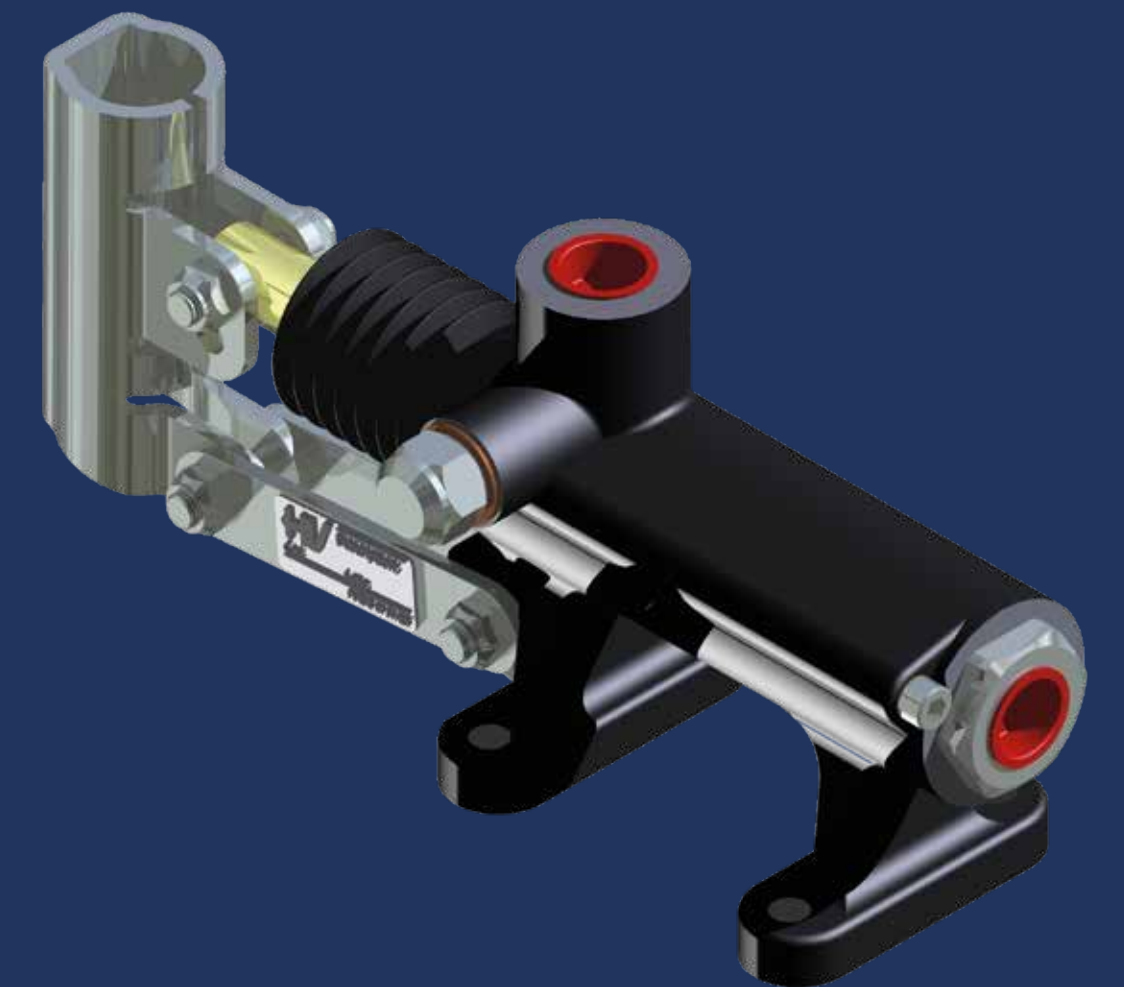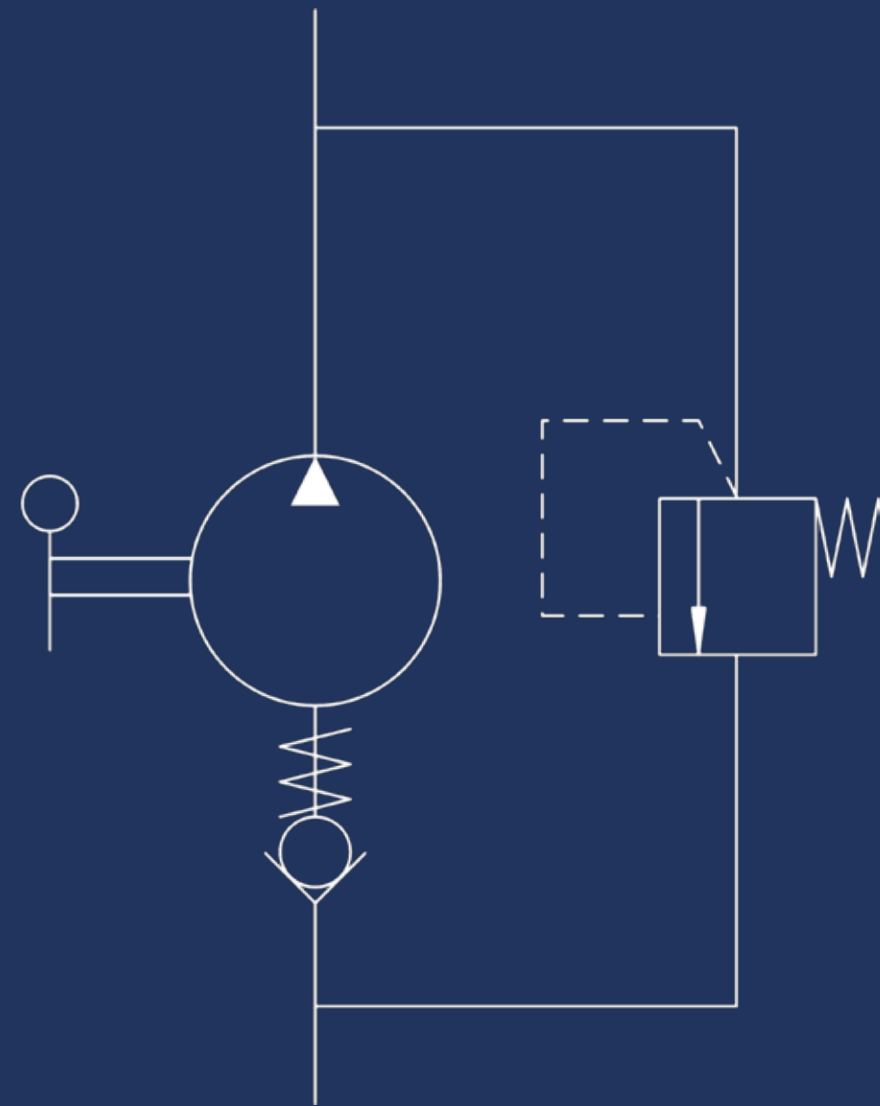

EFFORT DIAGRAM

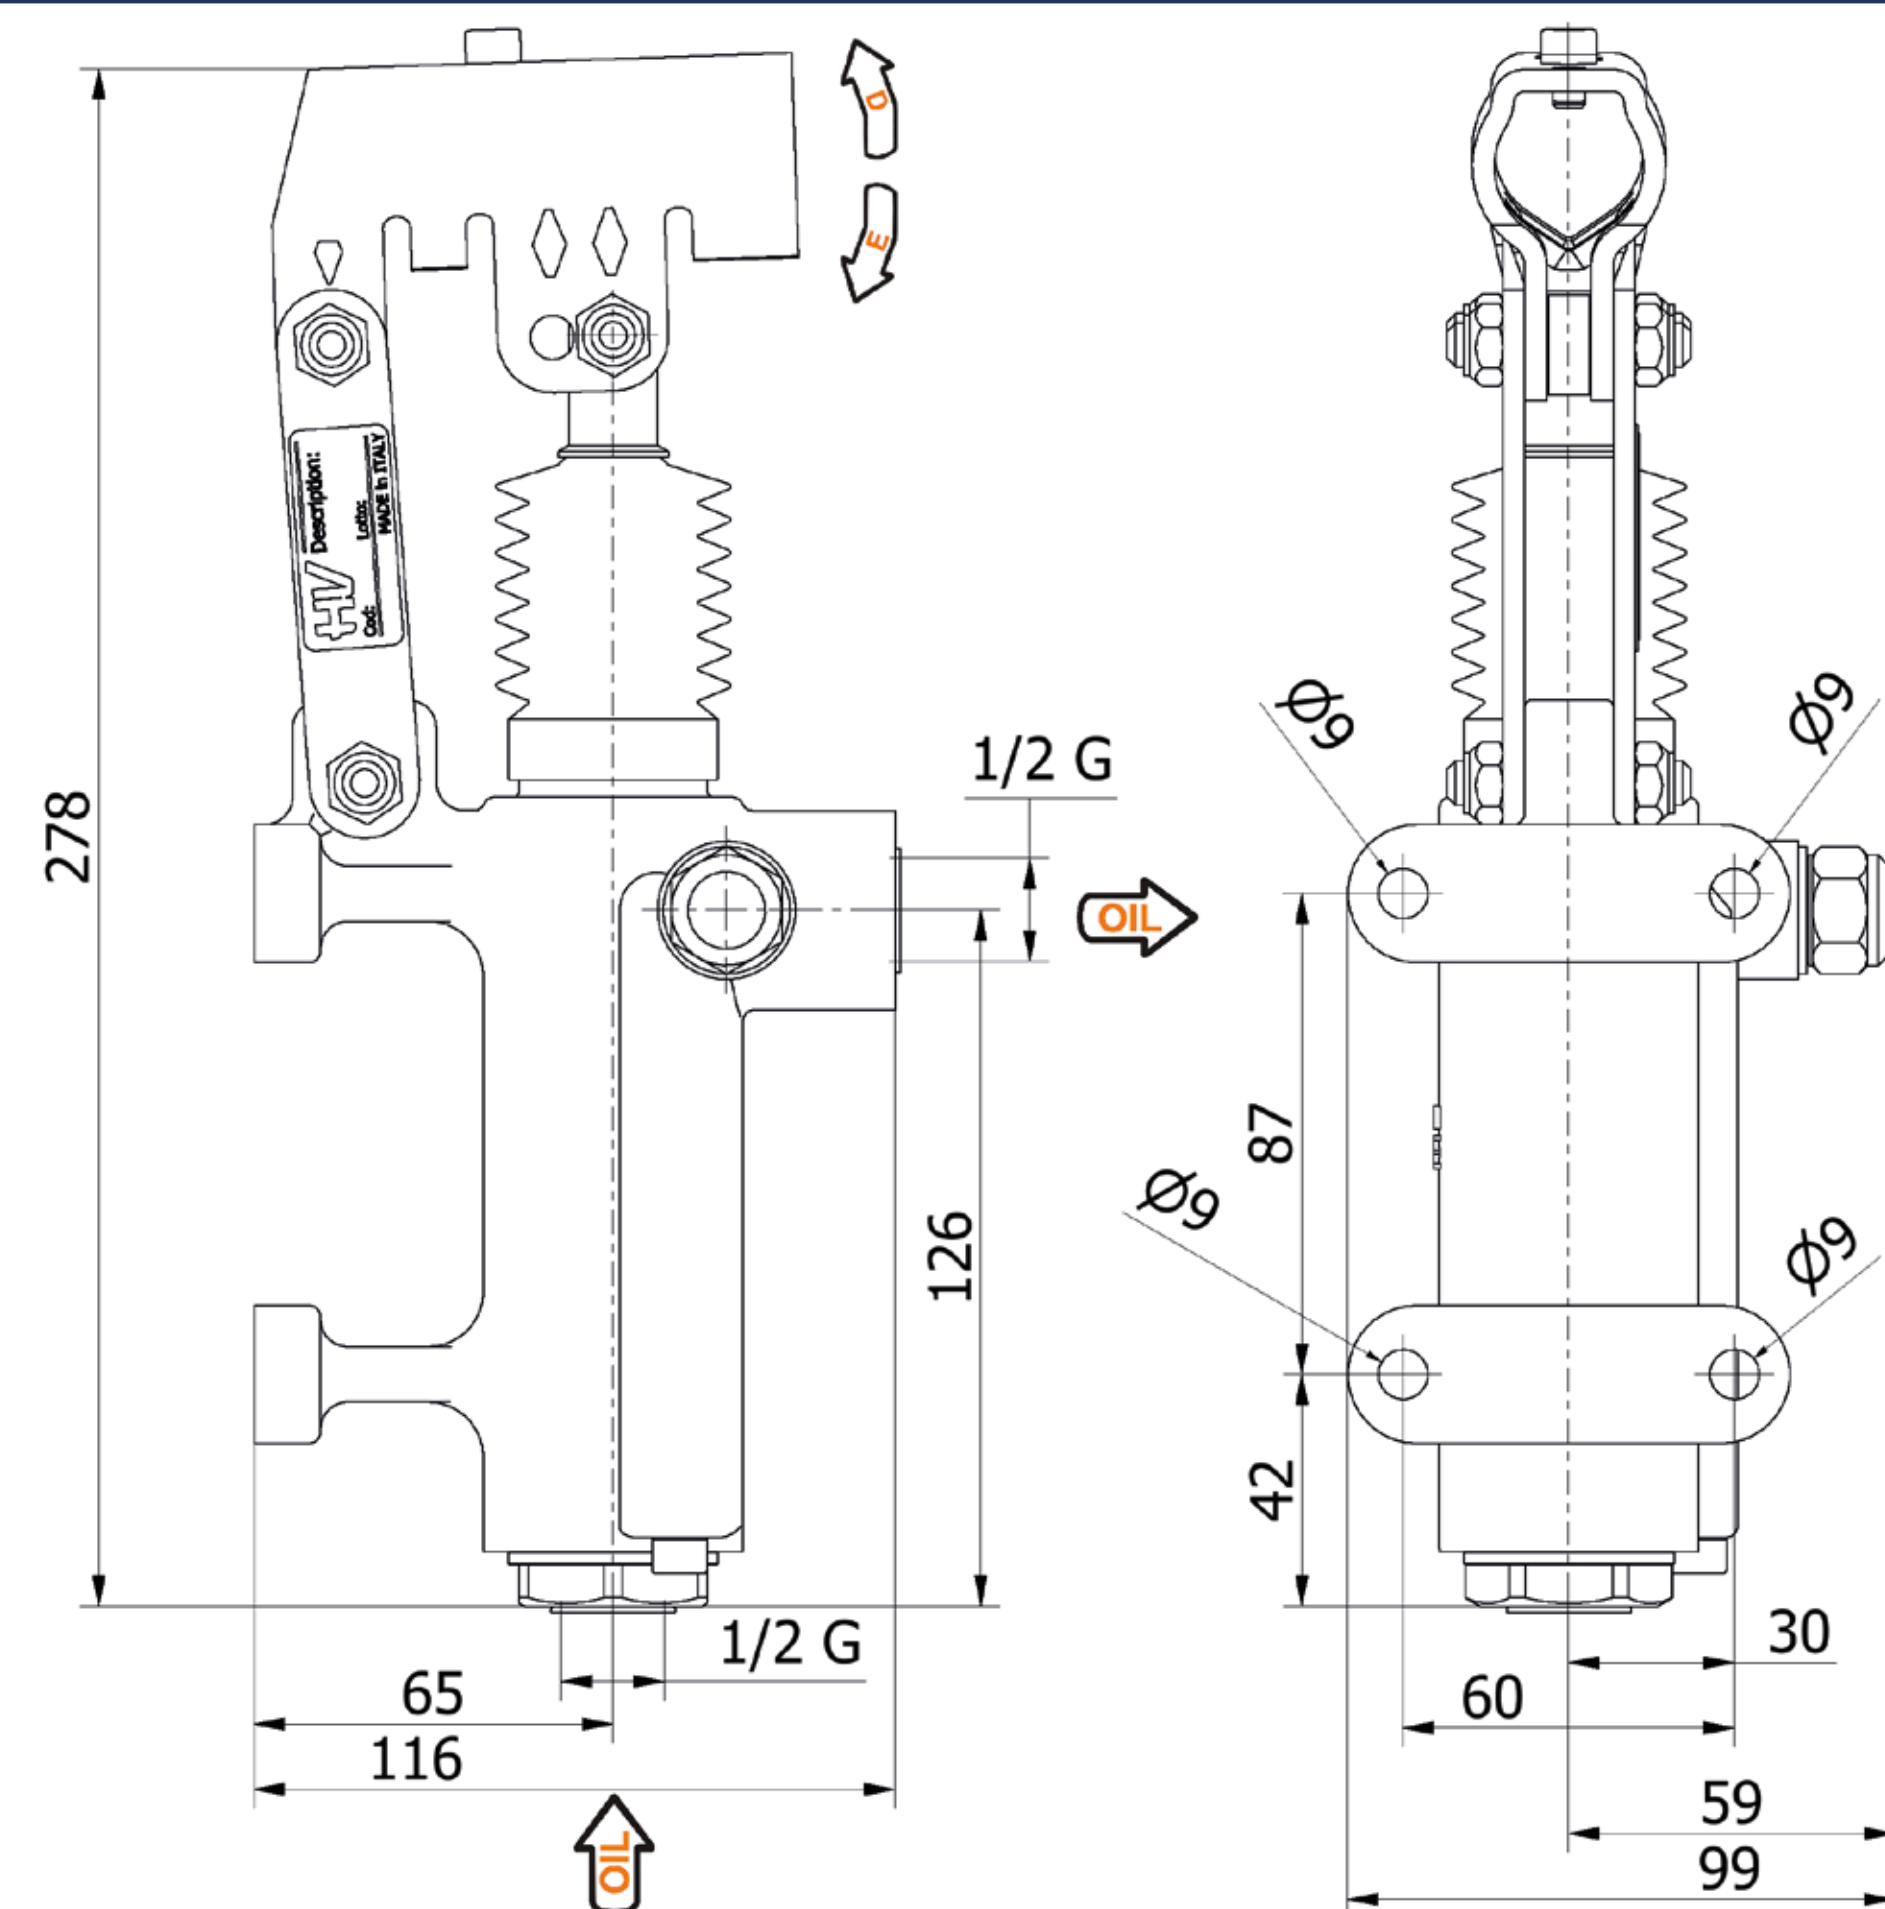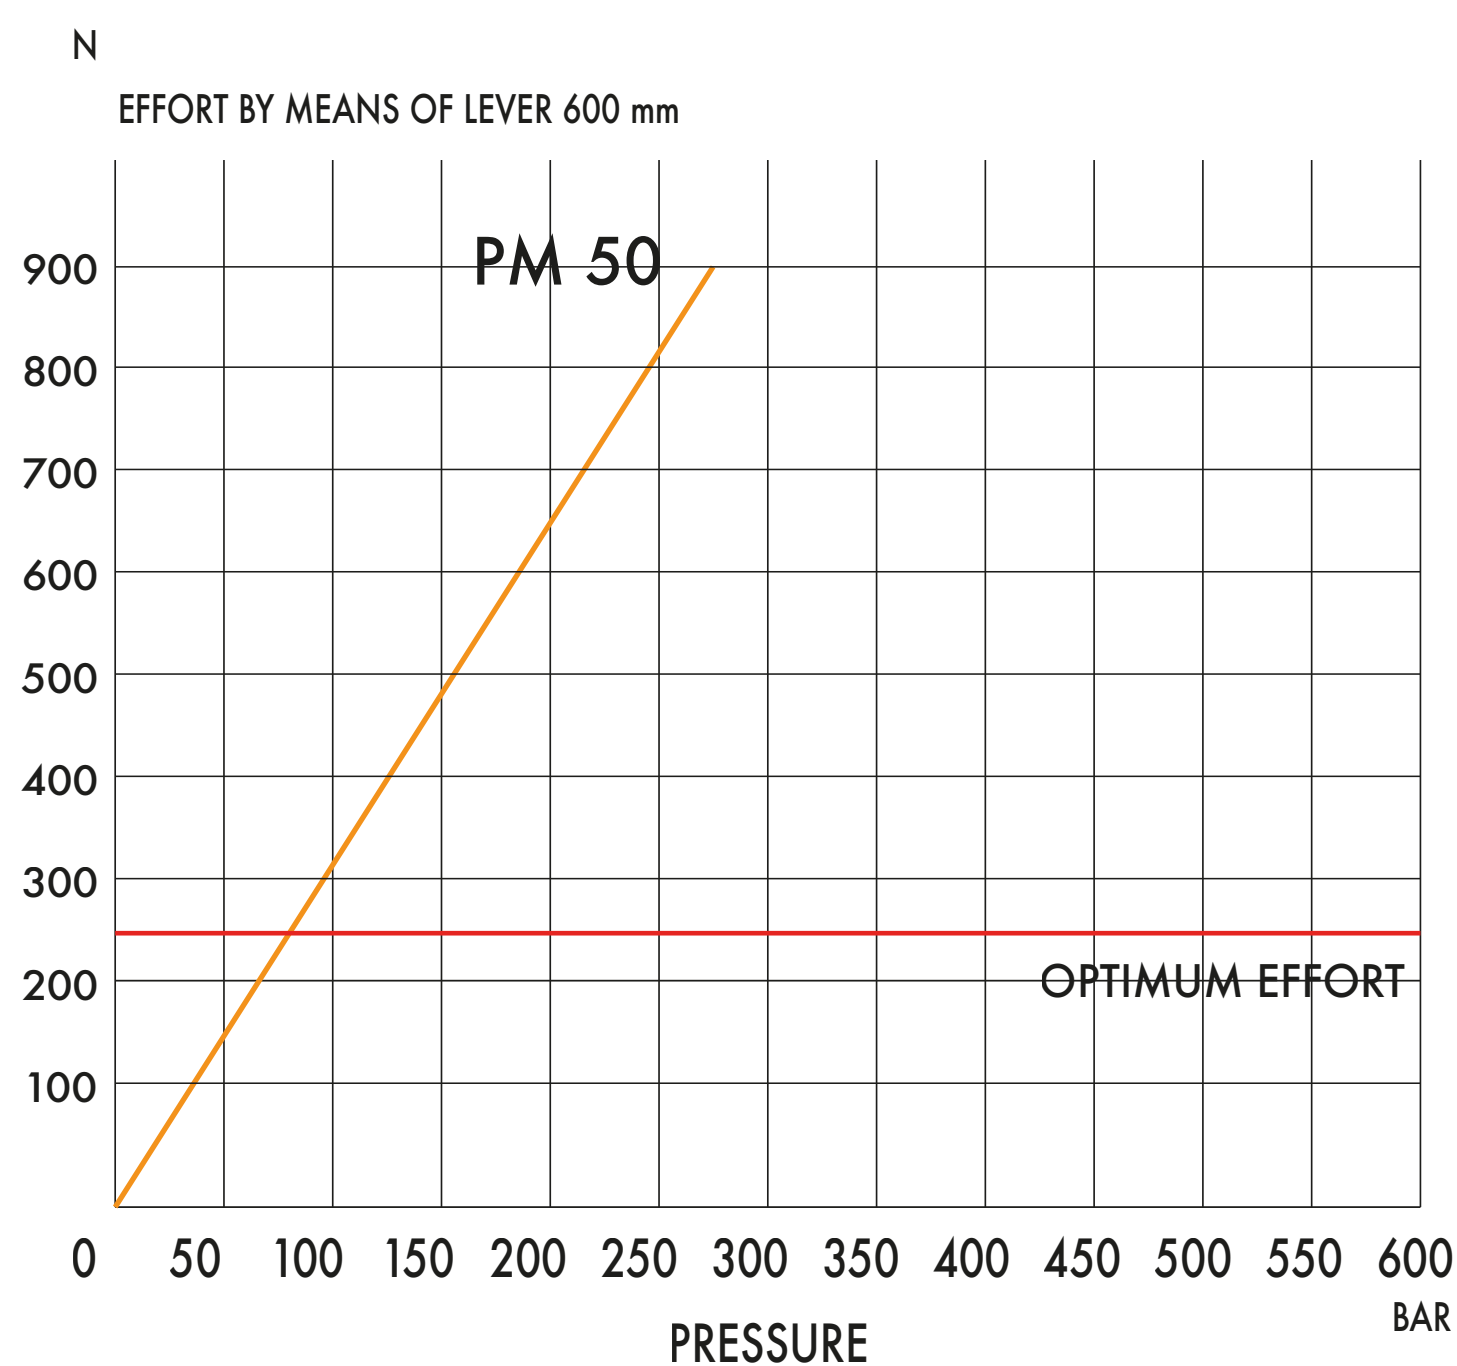[illegible]



DETAILS

- with release hand knob
- with pressure relief valve
- double acting hand pump for single acting cylinder
- for fixing to wall



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Pressure relief valve standard
setting: 100 bar

HYDRAULIC DIAGRAM

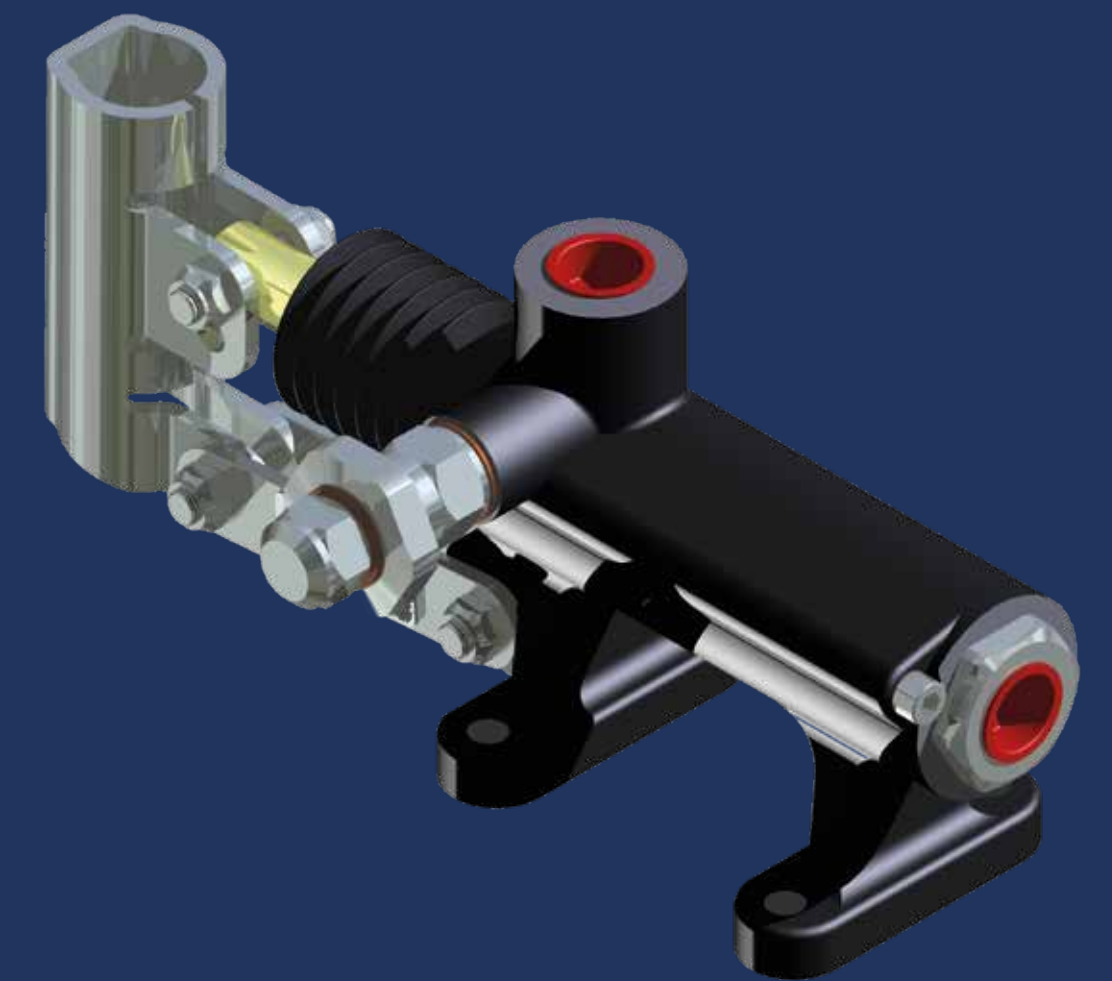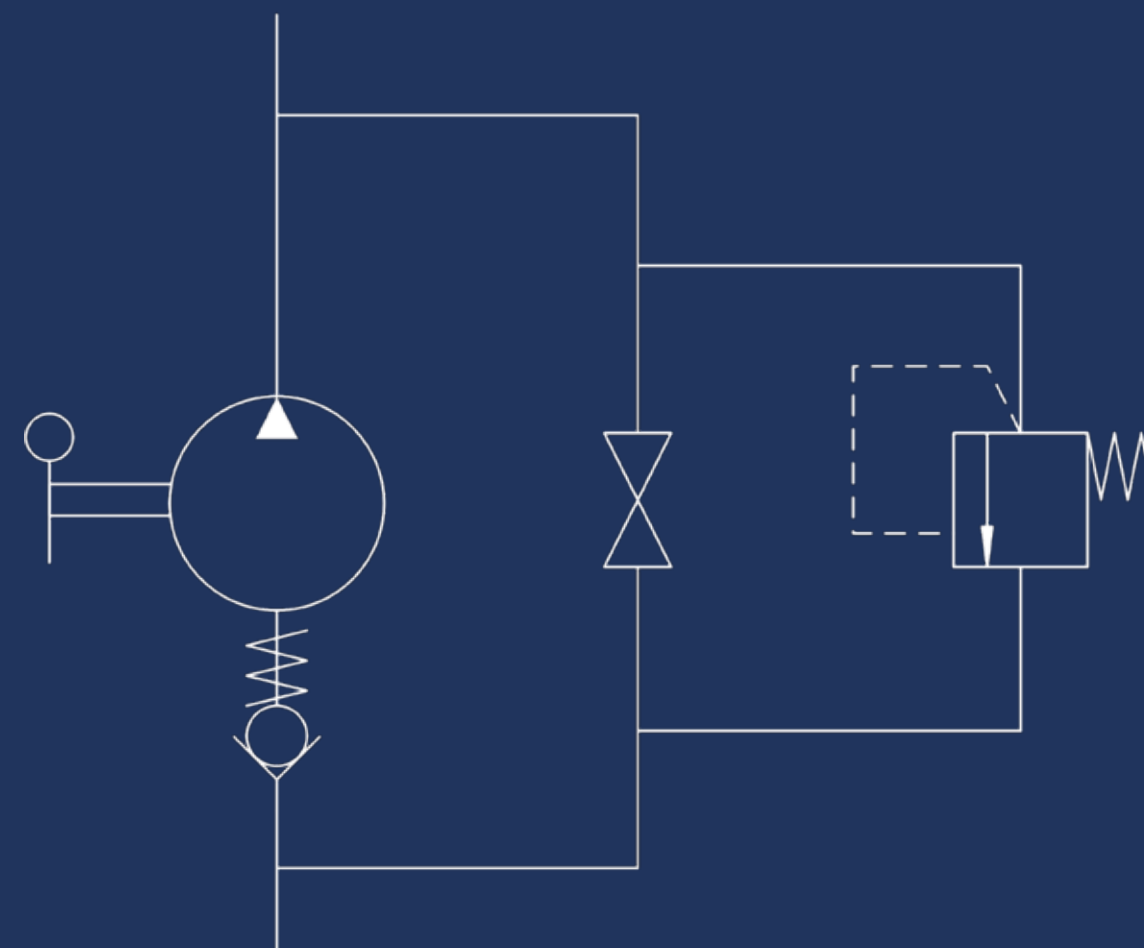

EFFORT DIAGRAM

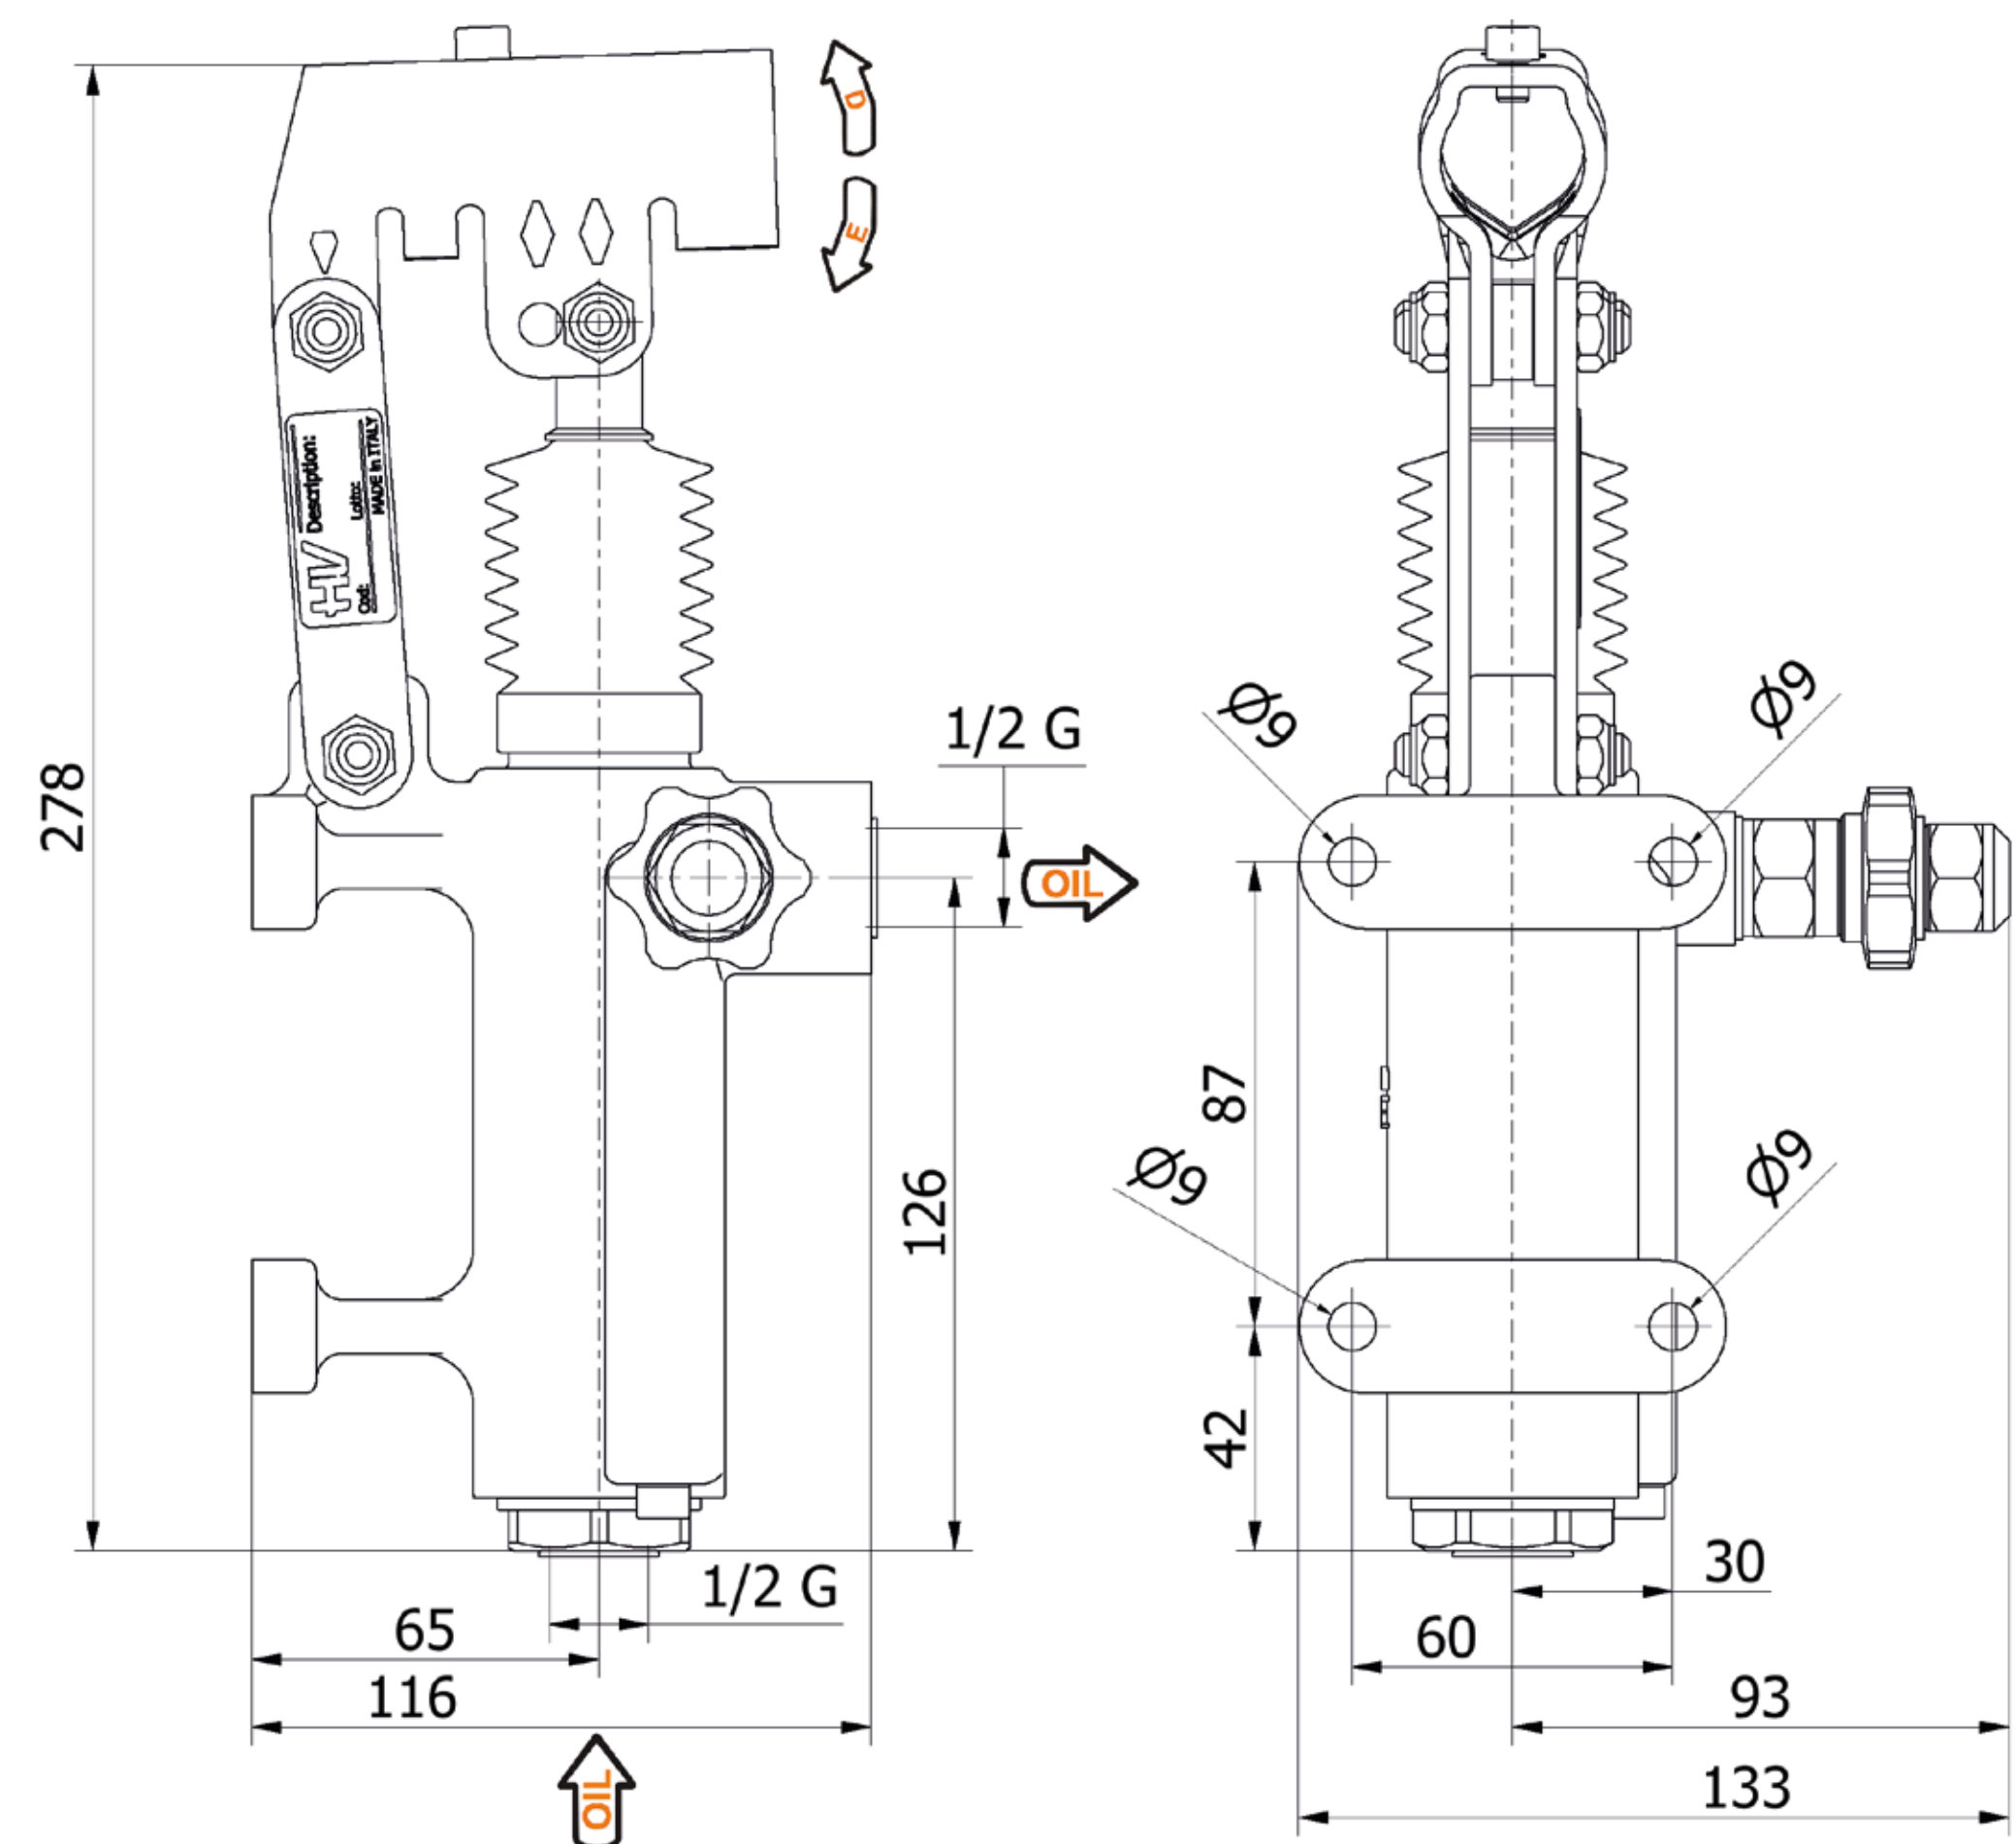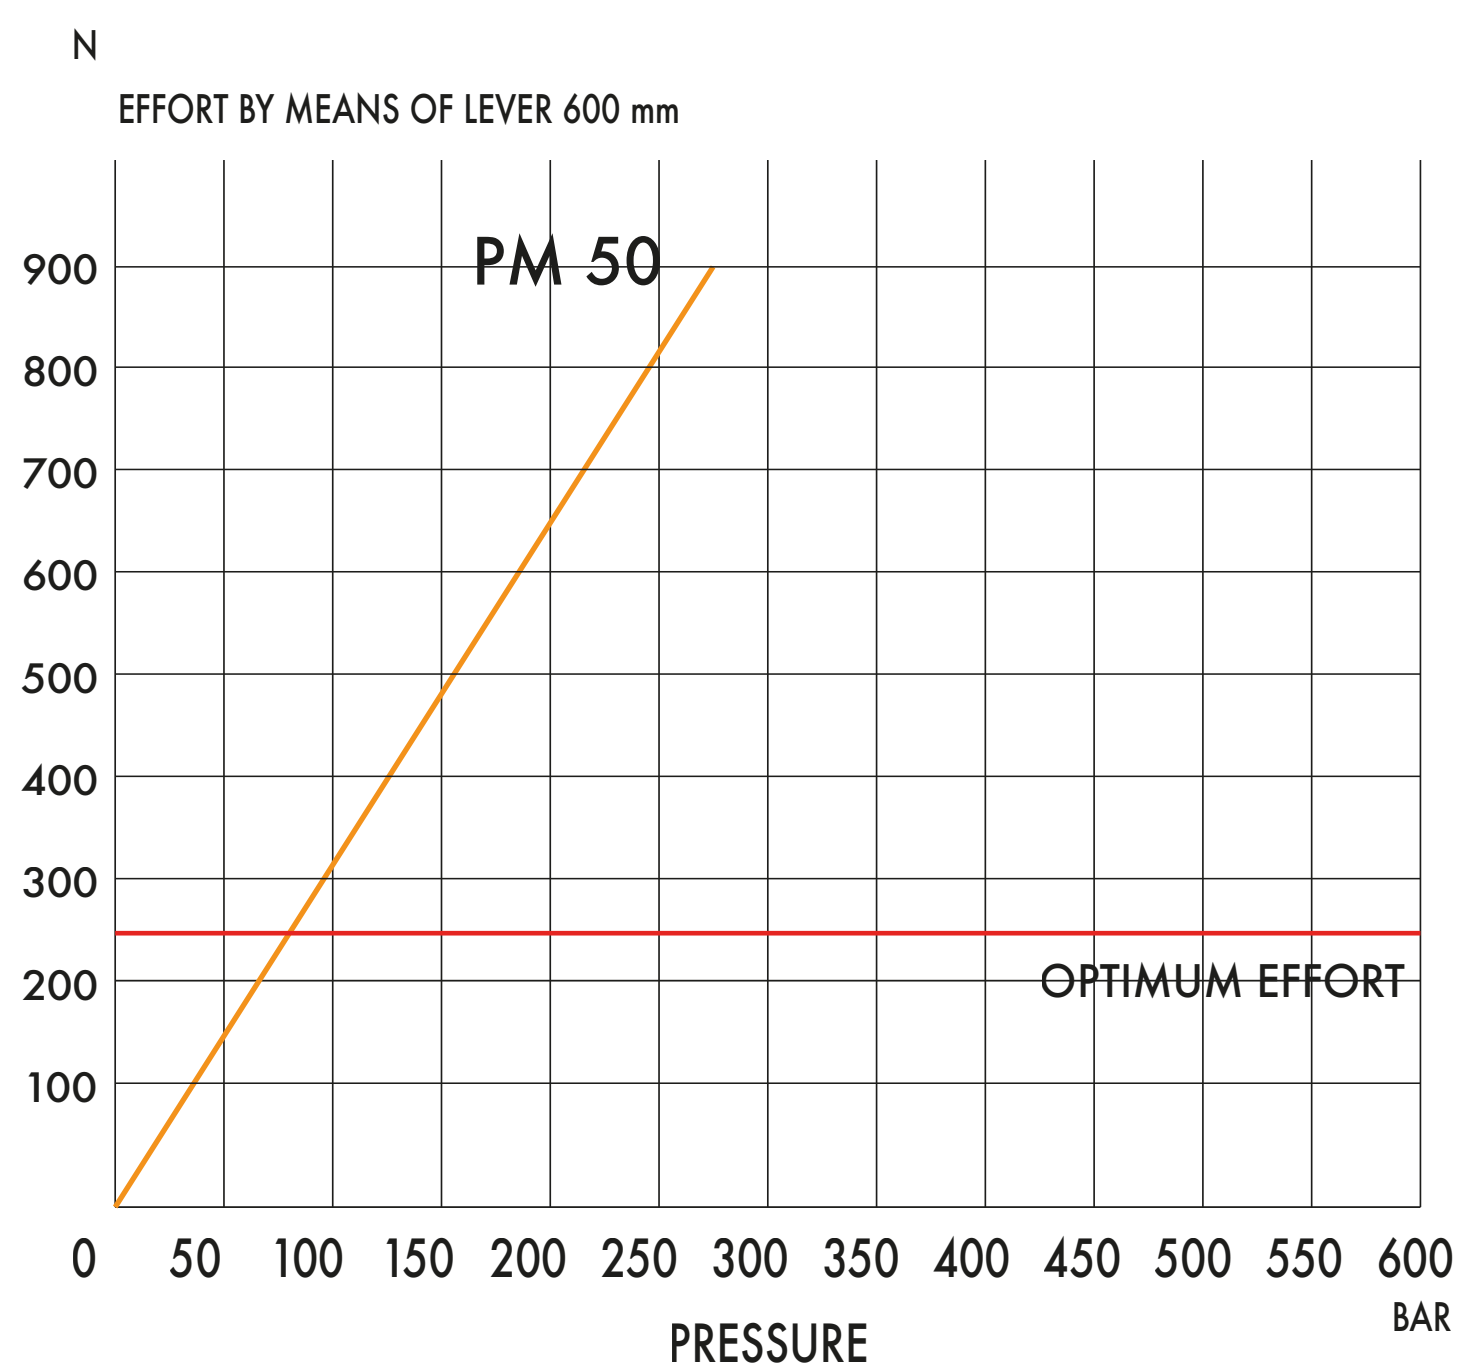[illegible]