

Hand pumps



PM2V 2-10 α

Tech sheet





DETAILS
 with release hand knob
 with automatic control for 1st step
 with pressure relief valve
 with pressure-gauge prearrangement double speed
 hand pump for single acting cylinder tank lt. 0,6

SPECIFICATIONS
 Aluminium Ergal body
 Piston treated with Niploy
 Aluminium Ergal support lever
 Lever connection Ø 20
 White zinc plated external parts
 Pressure relief valve standard
 setting: 500 bar
 With pressure-gauge
 prearrangement, connection: 1/4 G

HYDRAULIC DIAGRAM

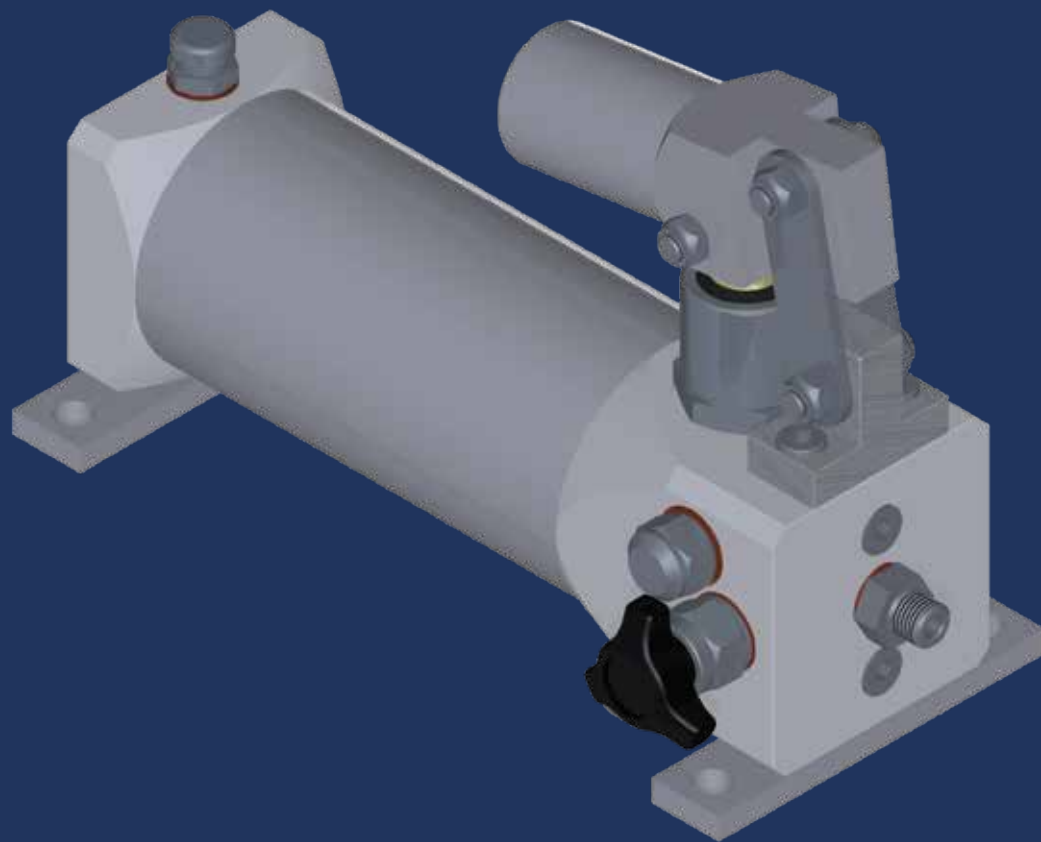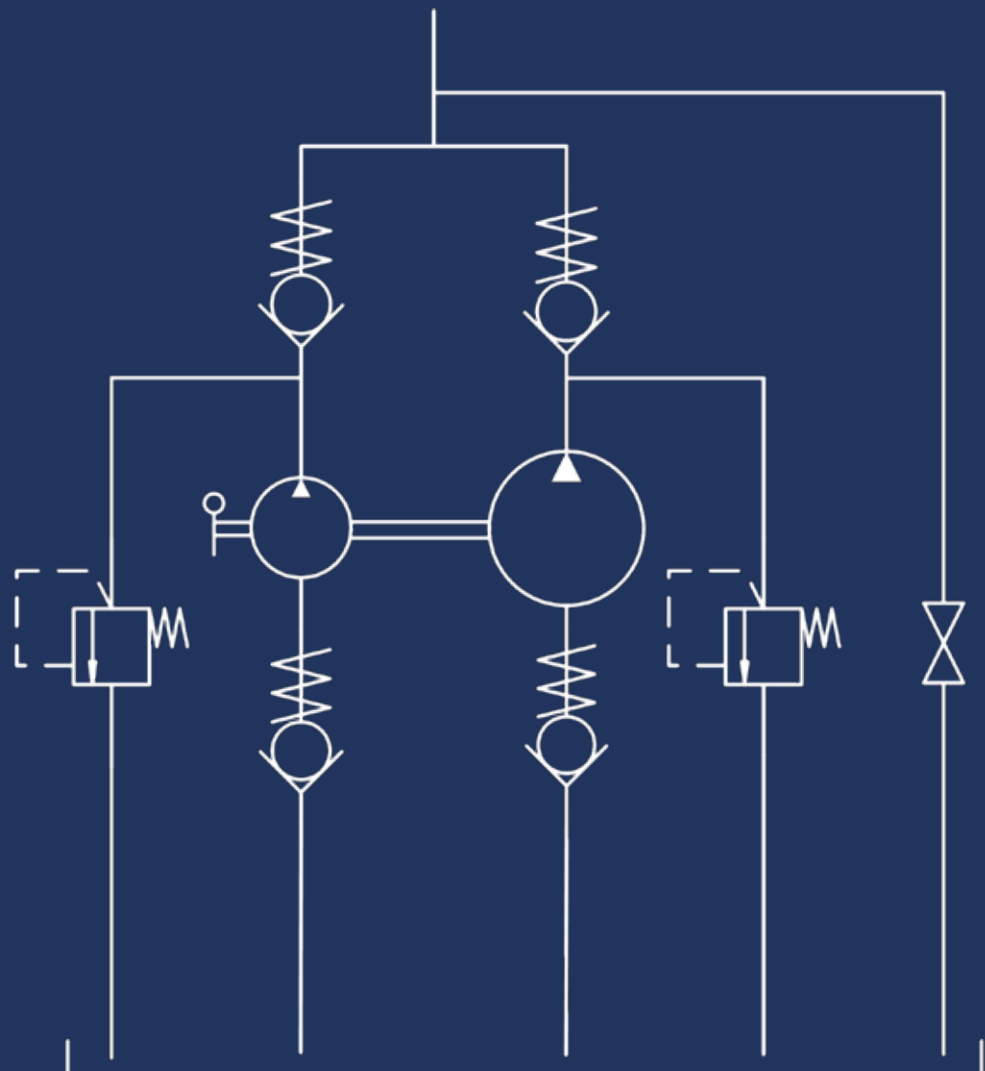

EFFORT DIAGRAM

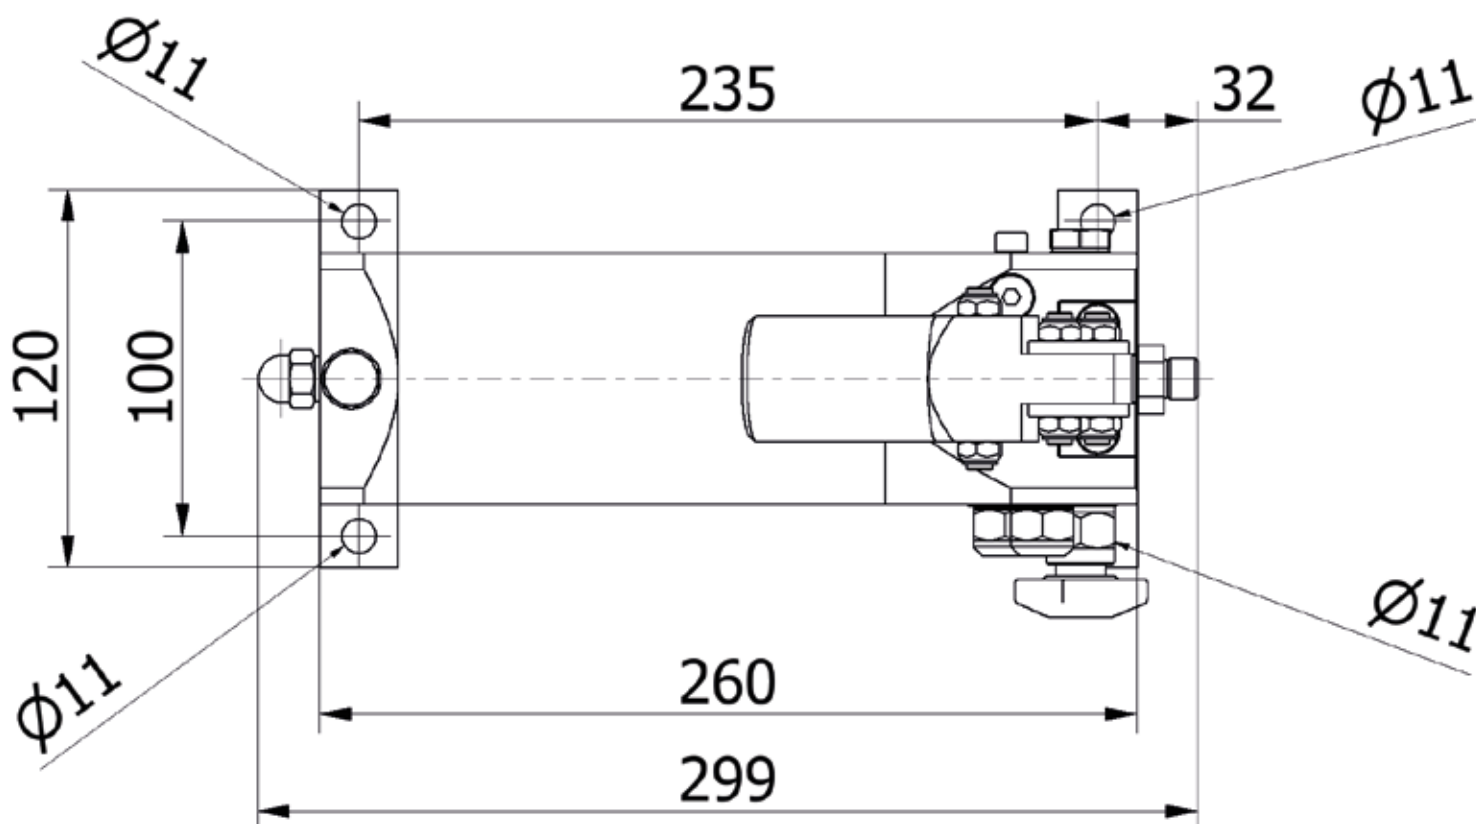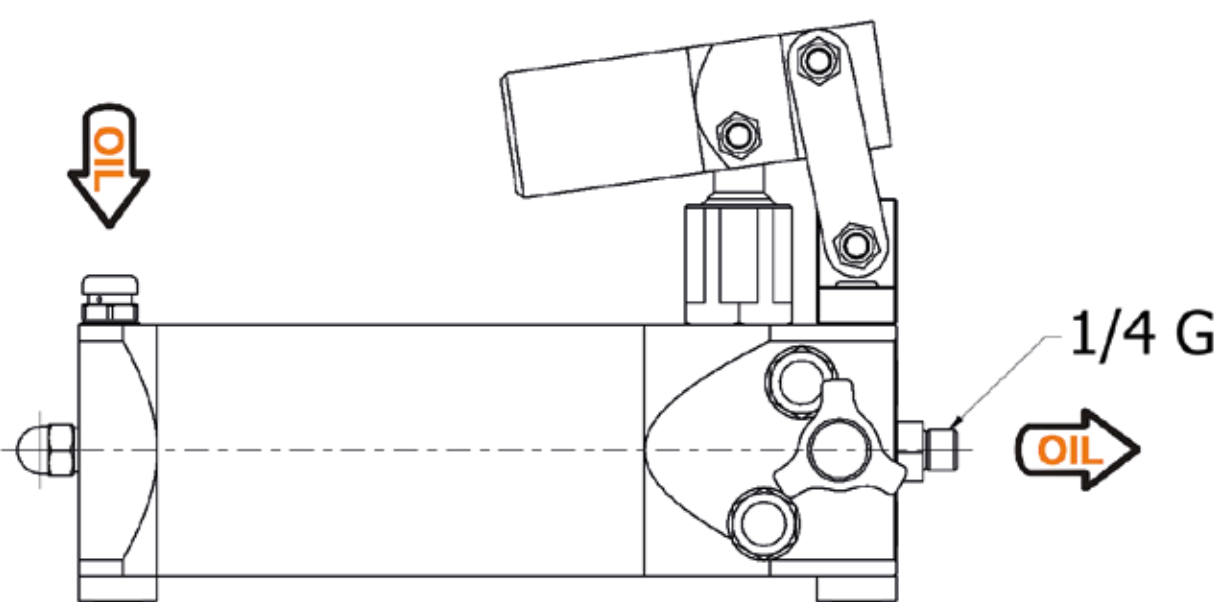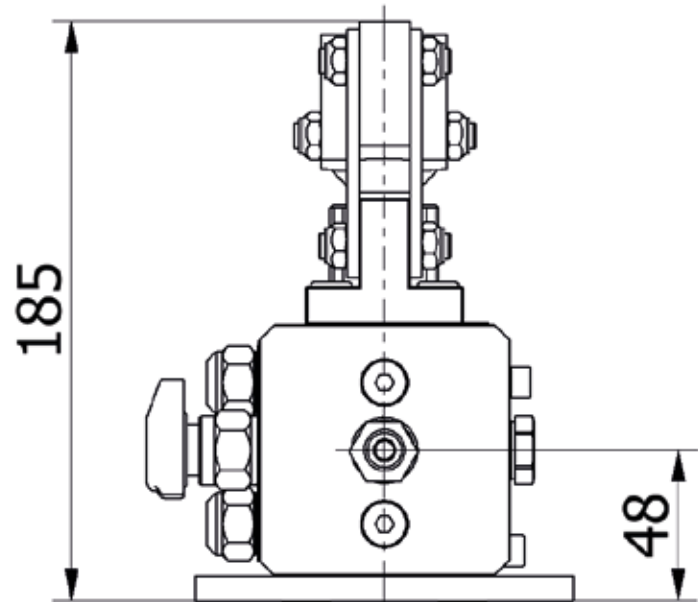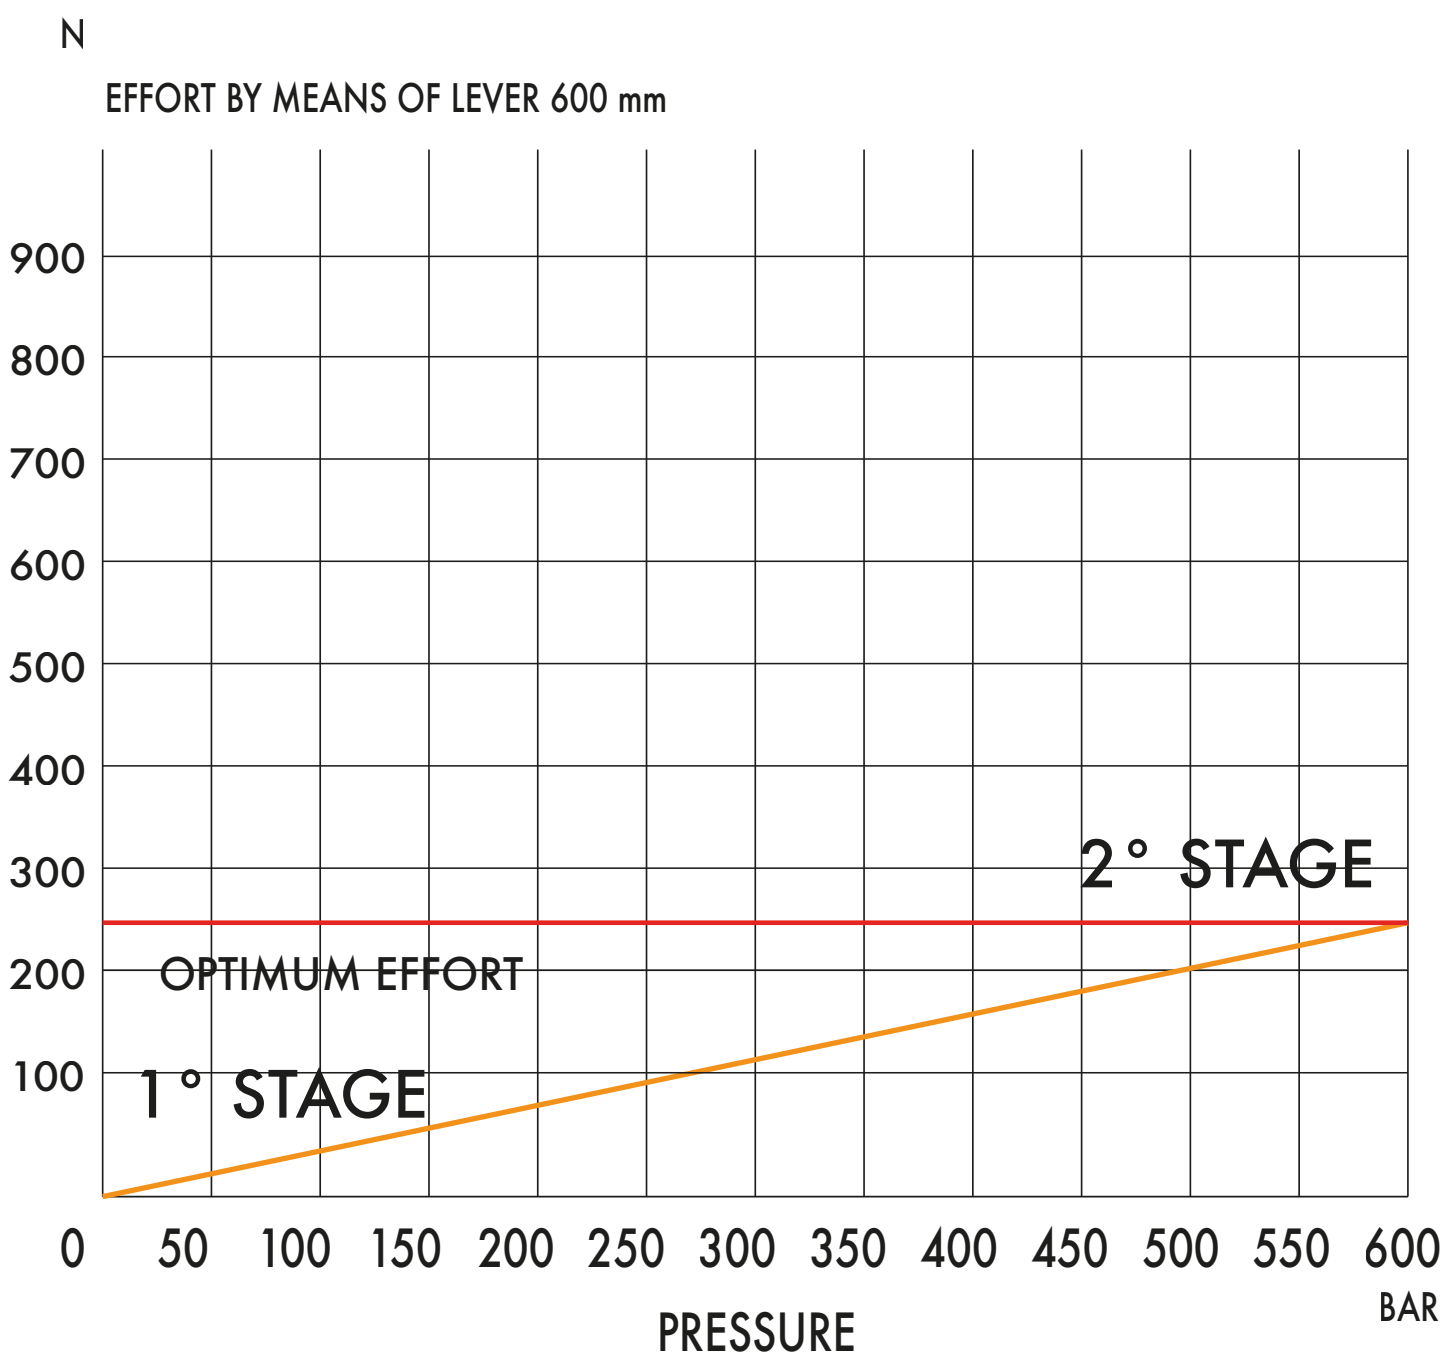

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	DISPLACEMENT cm ³		PRESSURE BAR		MASS KG	CODE
						STAGE 1	STAGE 2	STAGE 1	STAGE 2		
2-10	--	--	--	--	--	7,284	1,004	25	700	3,800	6072.0000