

Hand pumps

PM2V 5-80 Lm-s

Tech sheet


DETAILS

- with release hand knob
- with exclusion lever for the 1st speed
- two speed hand pump for a single acting cylinder
- for fixing to tank



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included

HYDRAULIC DIAGRAM

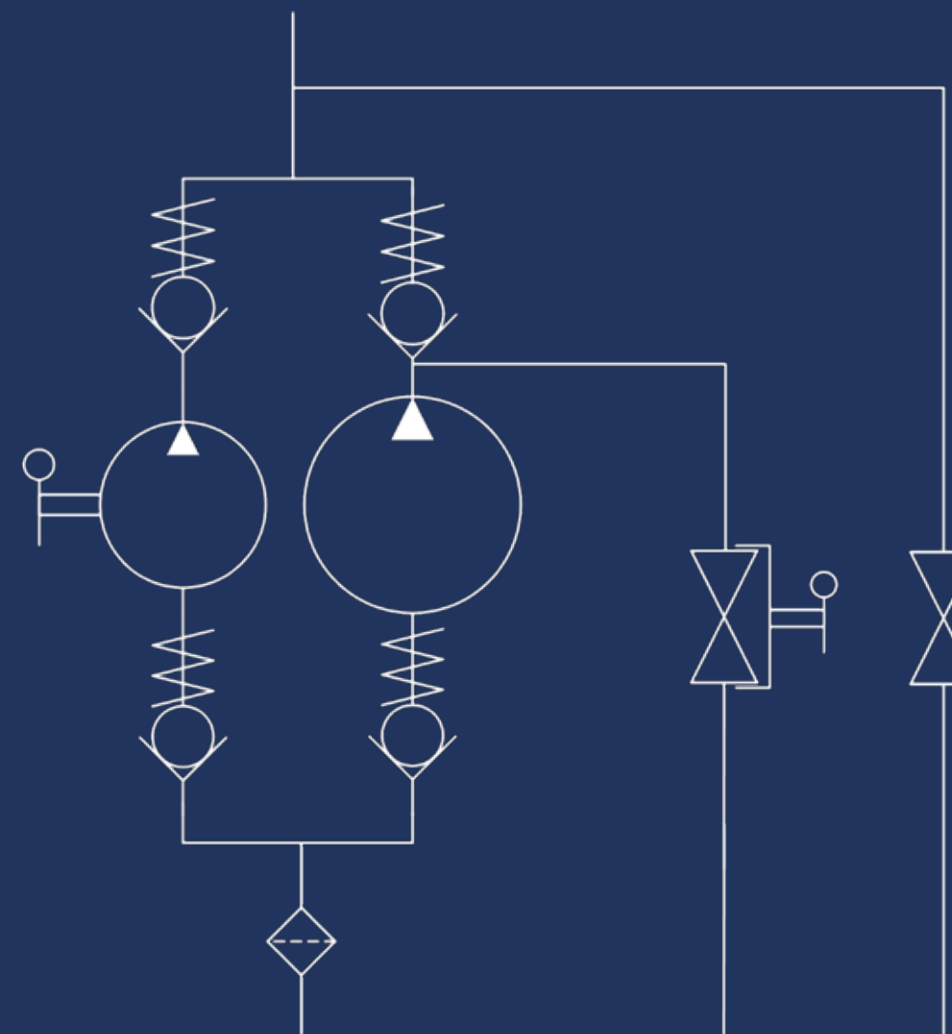

EFFORT DIAGRAM

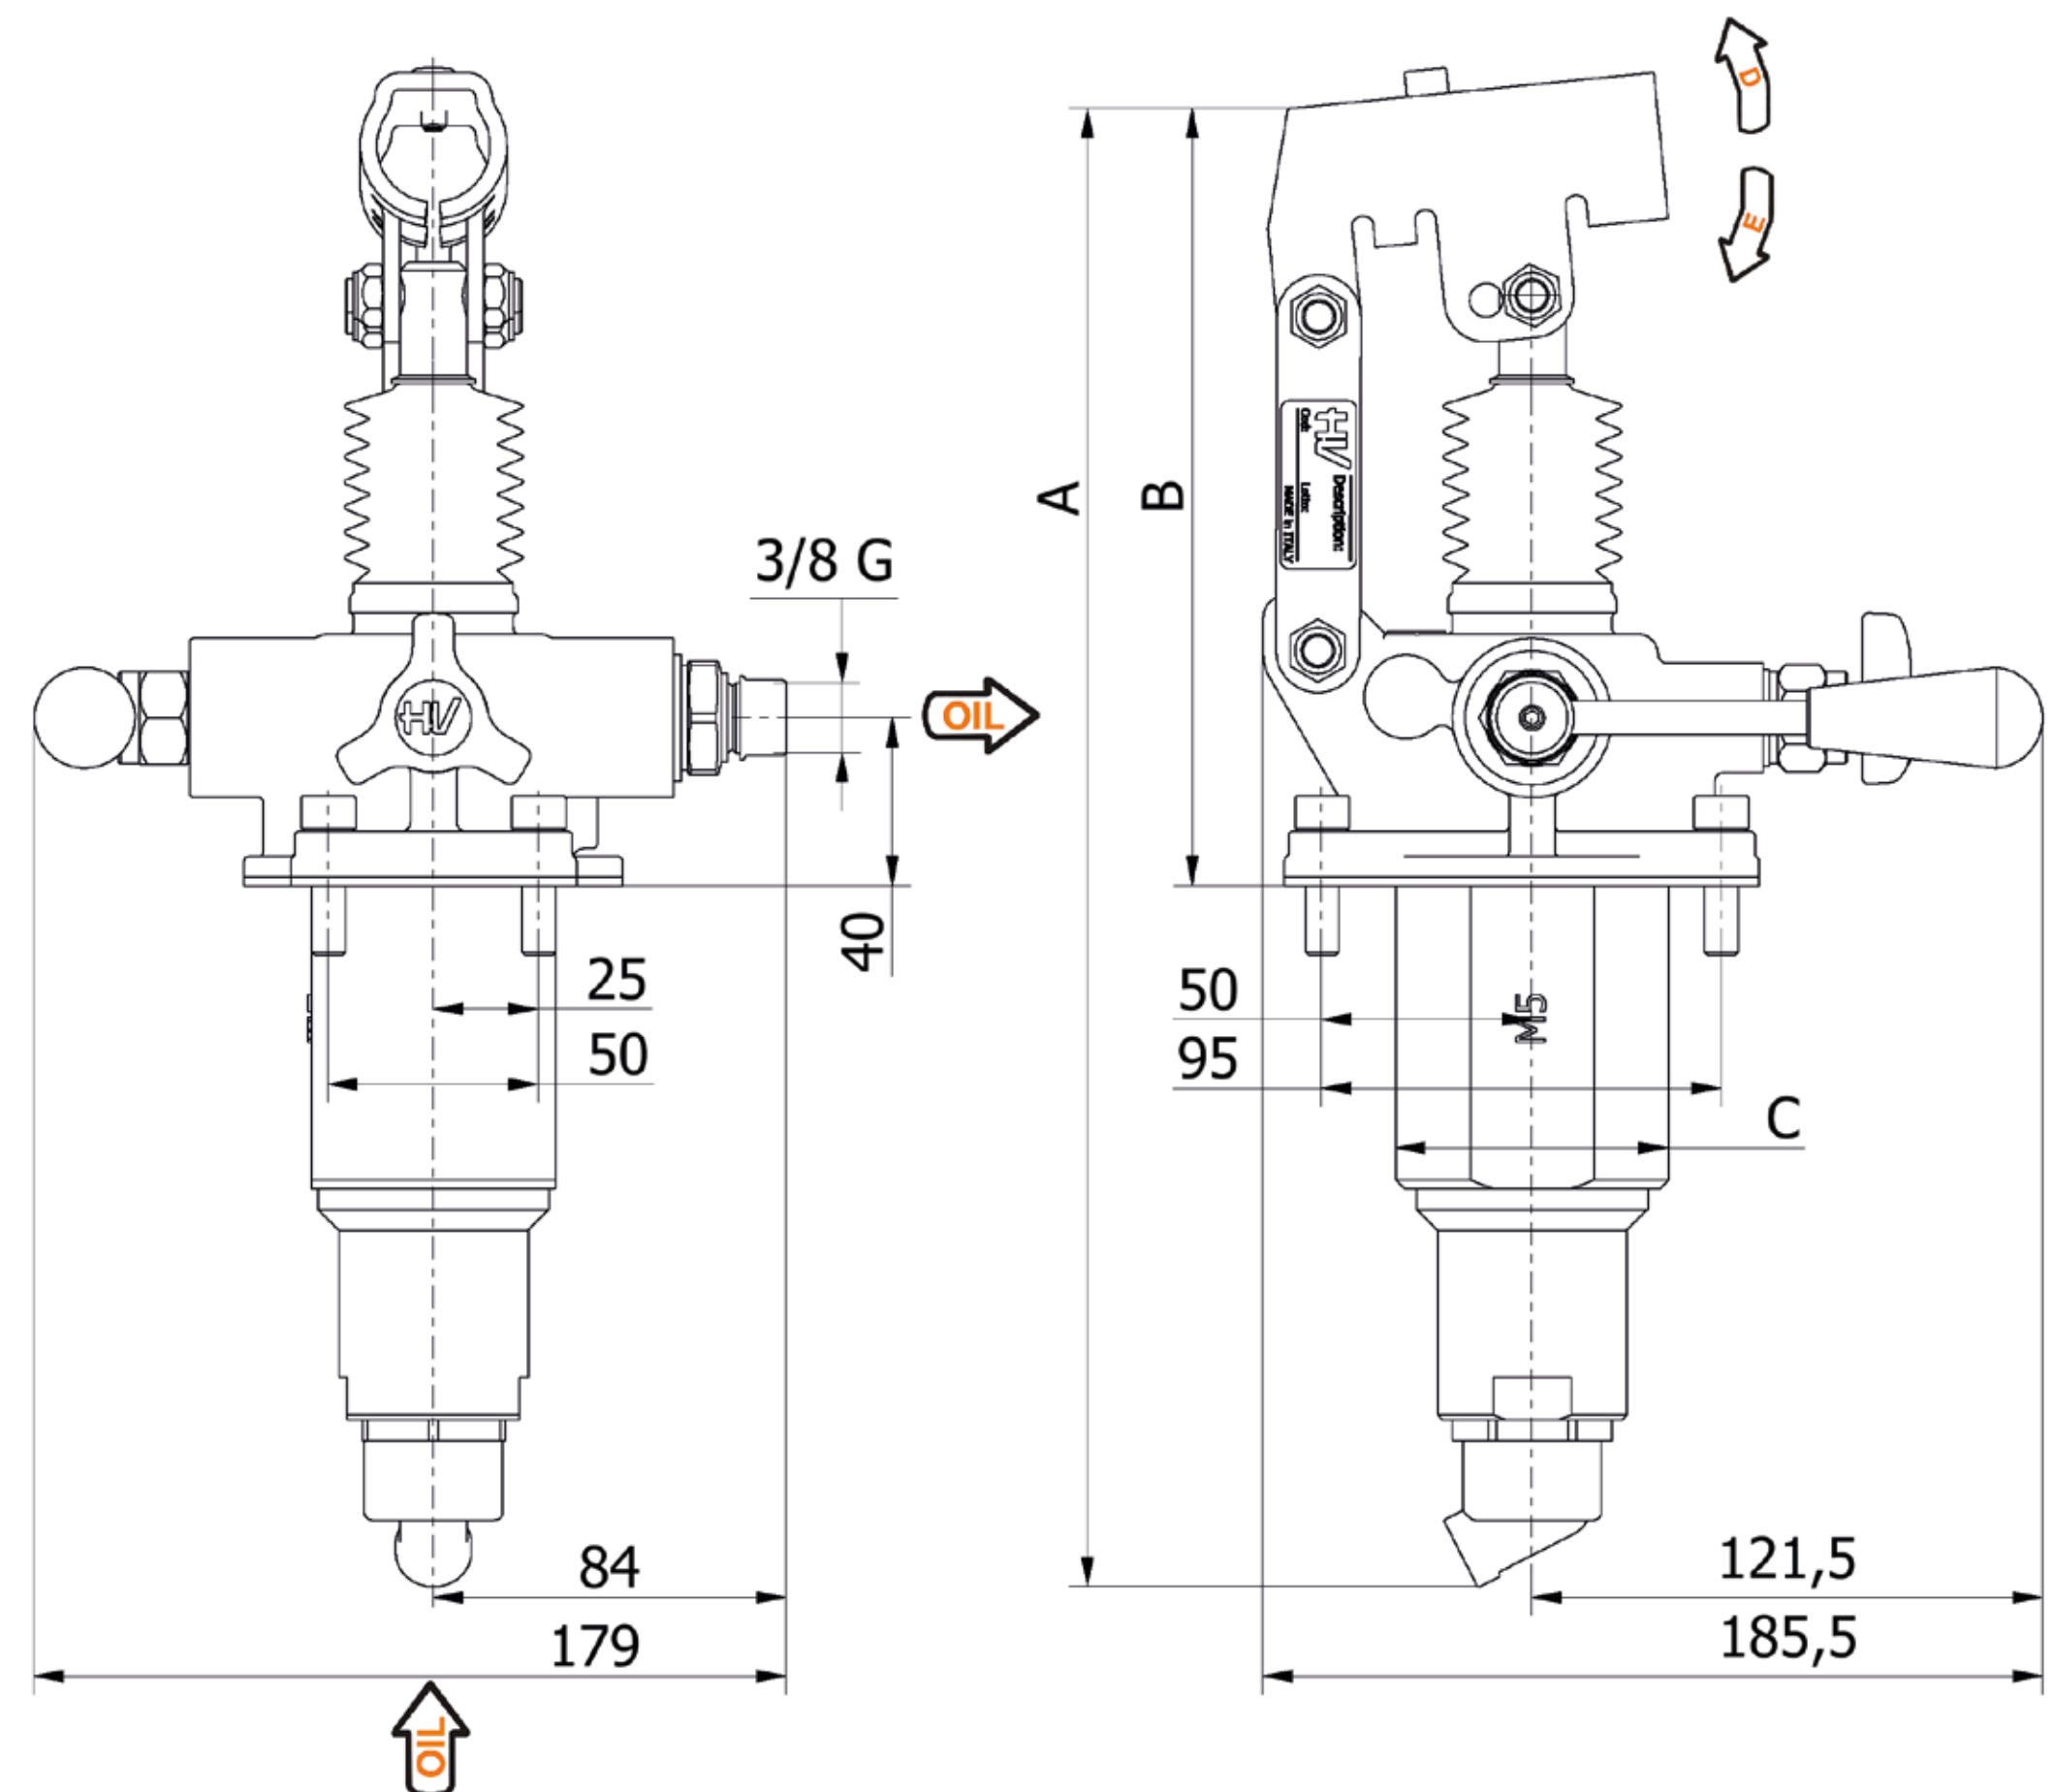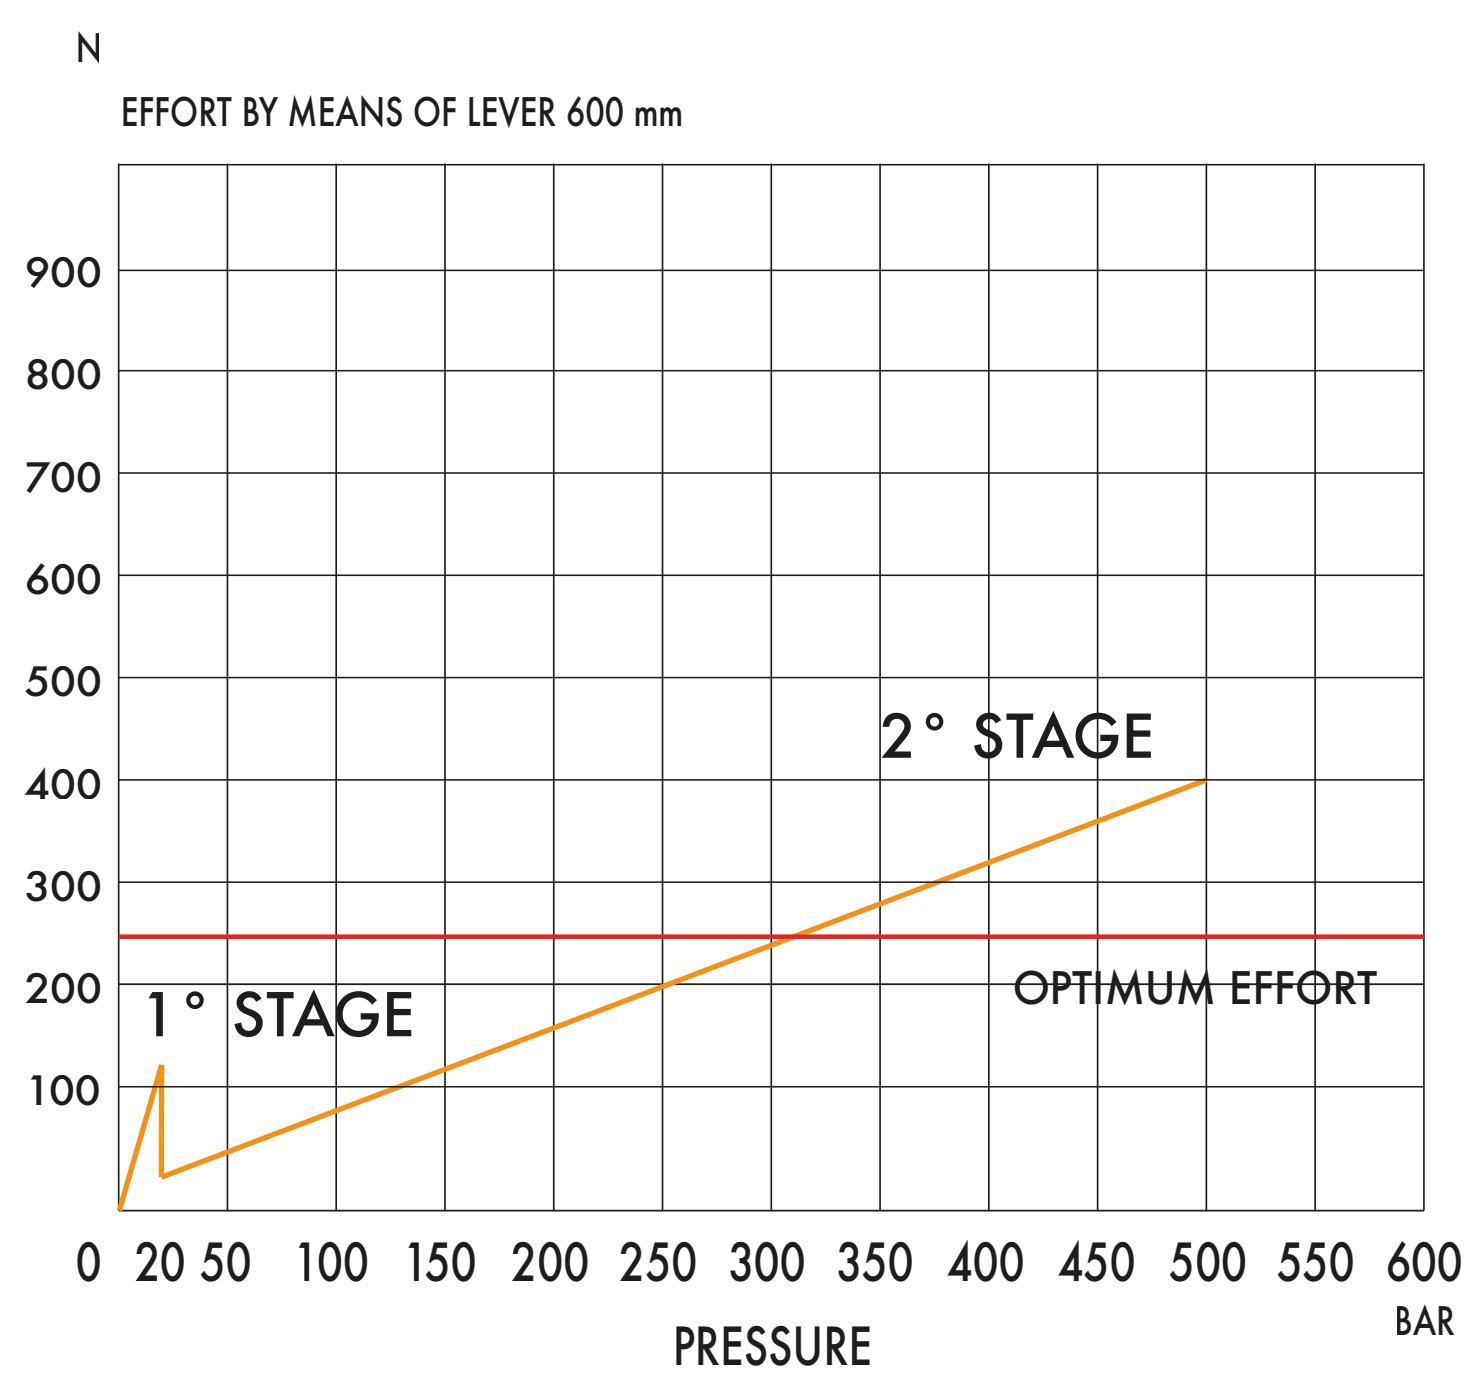[illegible]

Hand pumps

PM2V 5-80 Lm-byB-s

Tech sheet


DETAILS

- with release hand knob
- with exclusion lever for the 1st speed
- with pressure relief valve
- two speed hand pump for a single acting cylinder
- for fixing to tank



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included
Pressure relief valve standard
setting: 400 bar

HYDRAULIC DIAGRAM

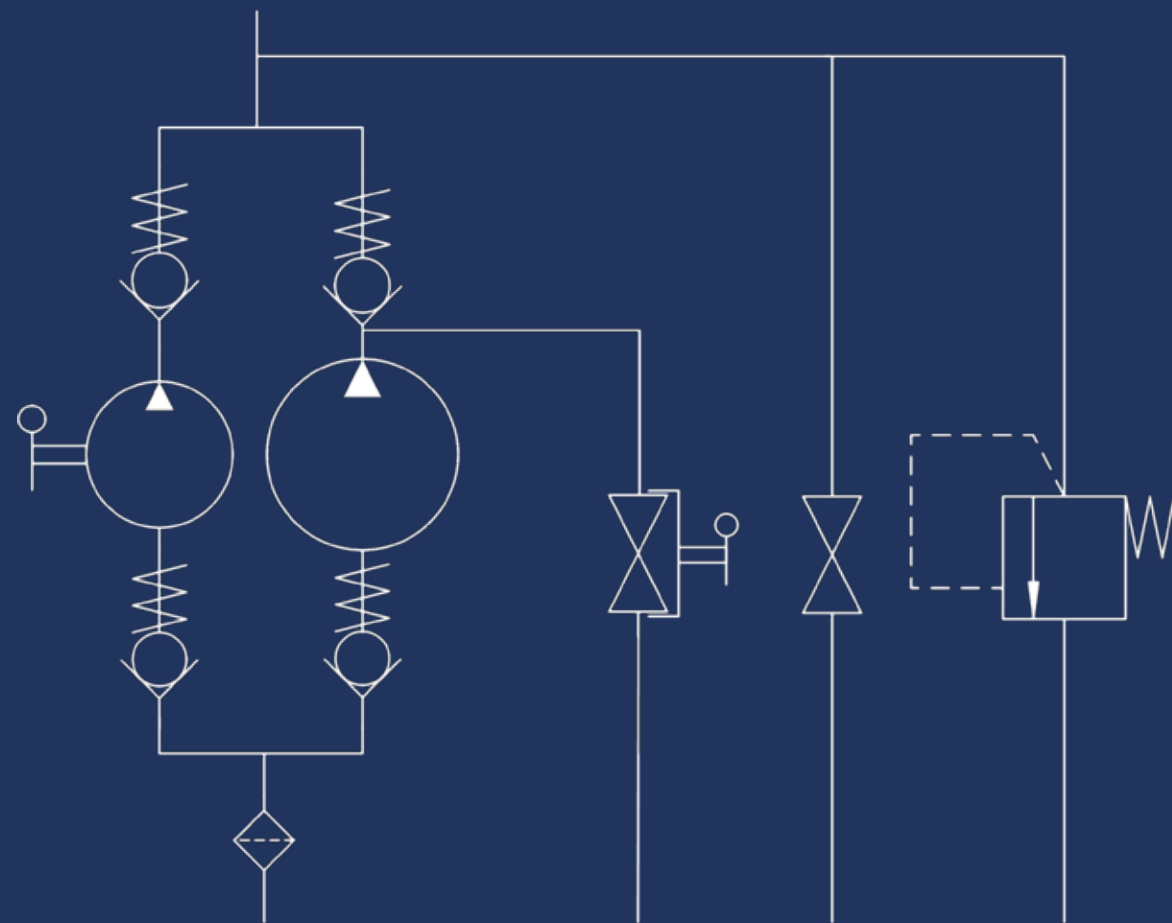

EFFORT DIAGRAM

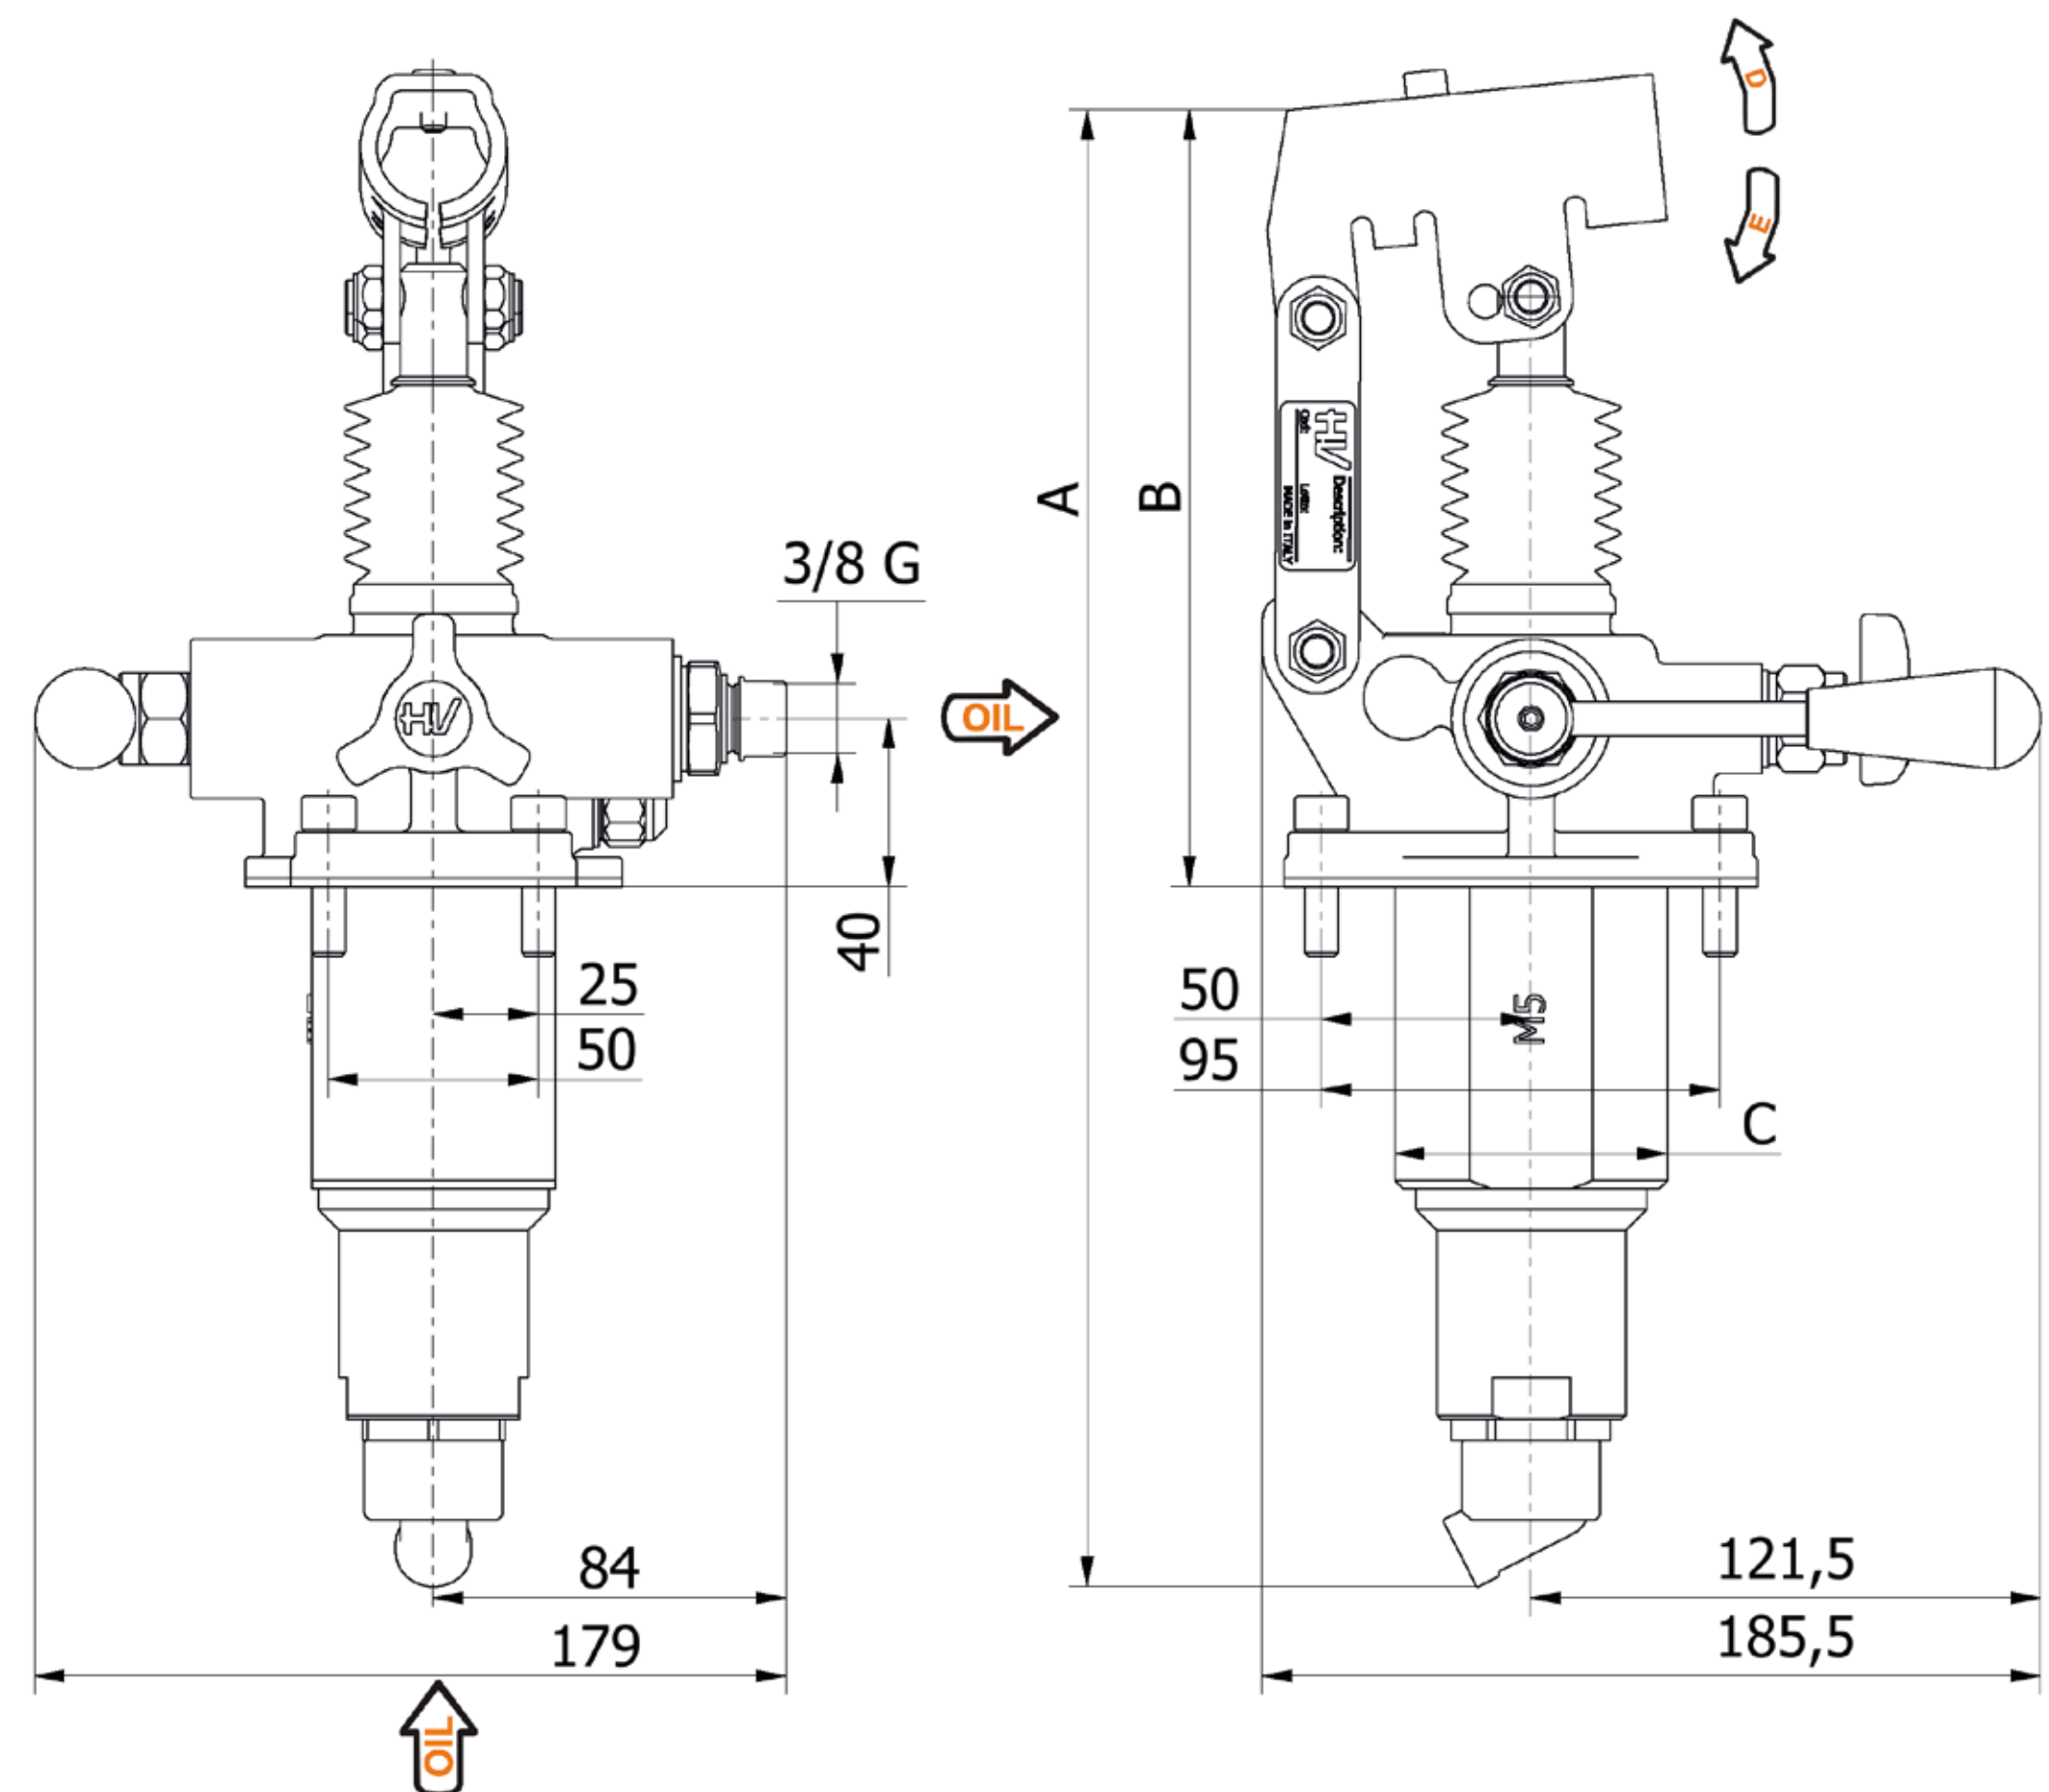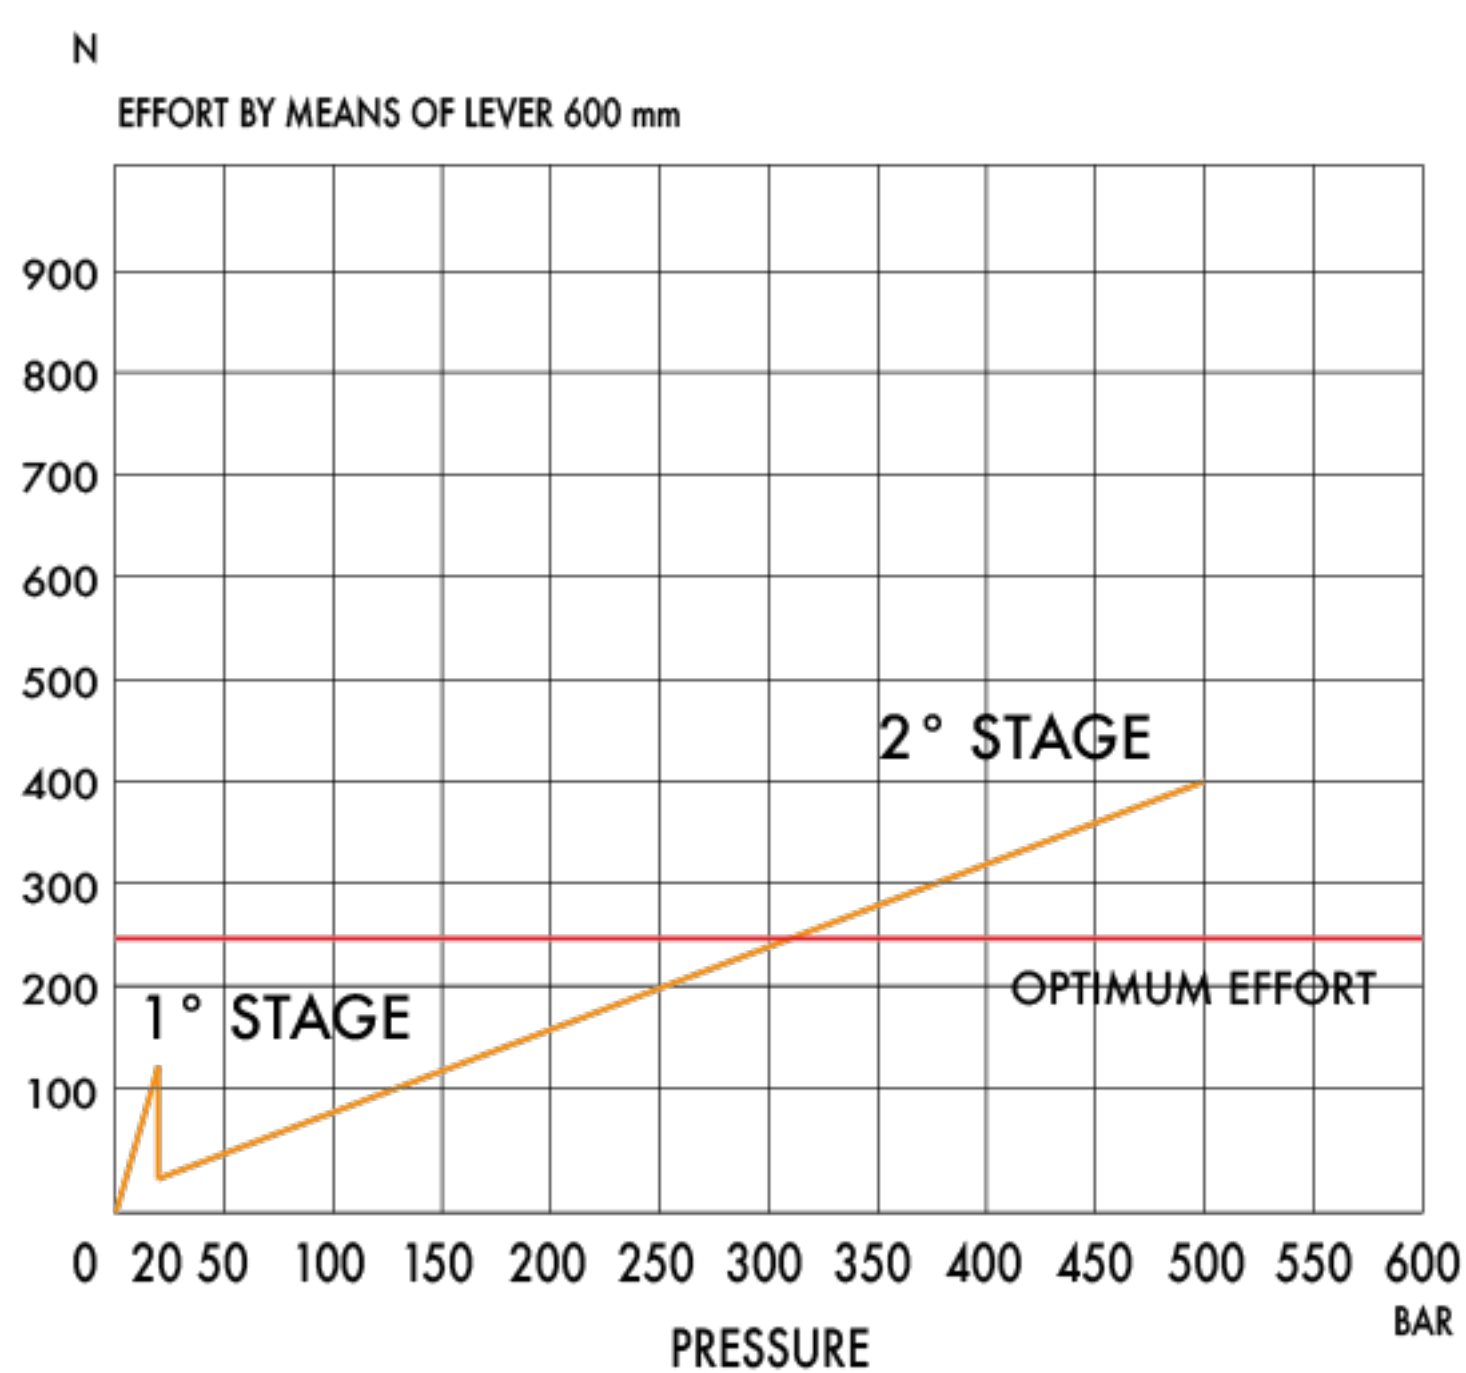[illegible]

Hand pumps

PM2V 5-80 Lm-pm-s

Tech sheet


DETAILS

- with release hand knob
- with exclusion lever for the 1st speed
- with pressure-gauge prearrangement
- two speed hand pump for a single acting cylinder
- for fixing to tank



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included
With pressure-gauge
prearrangement, connection: 1/4 G

HYDRAULIC DIAGRAM

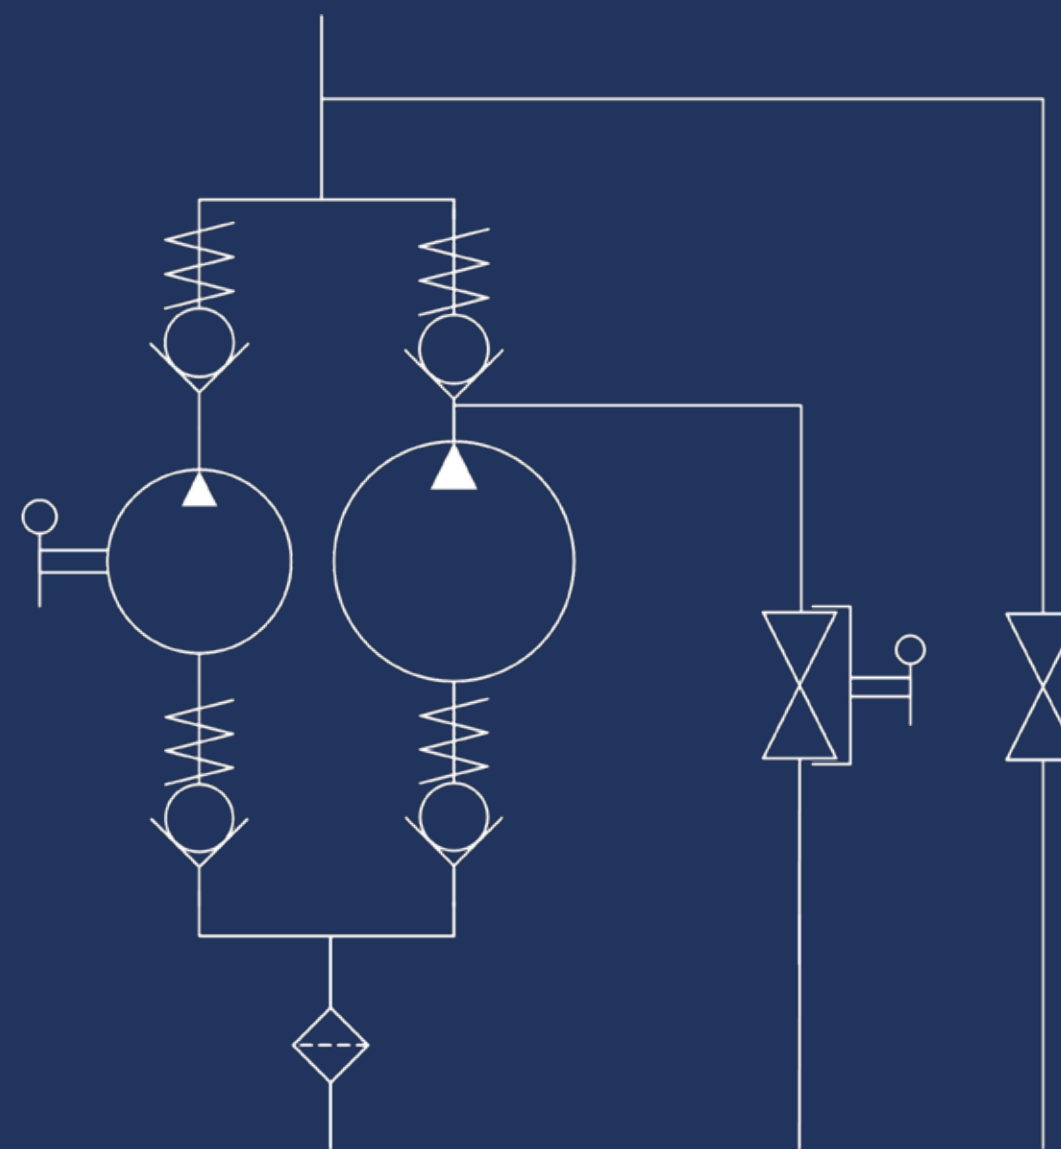

EFFORT DIAGRAM

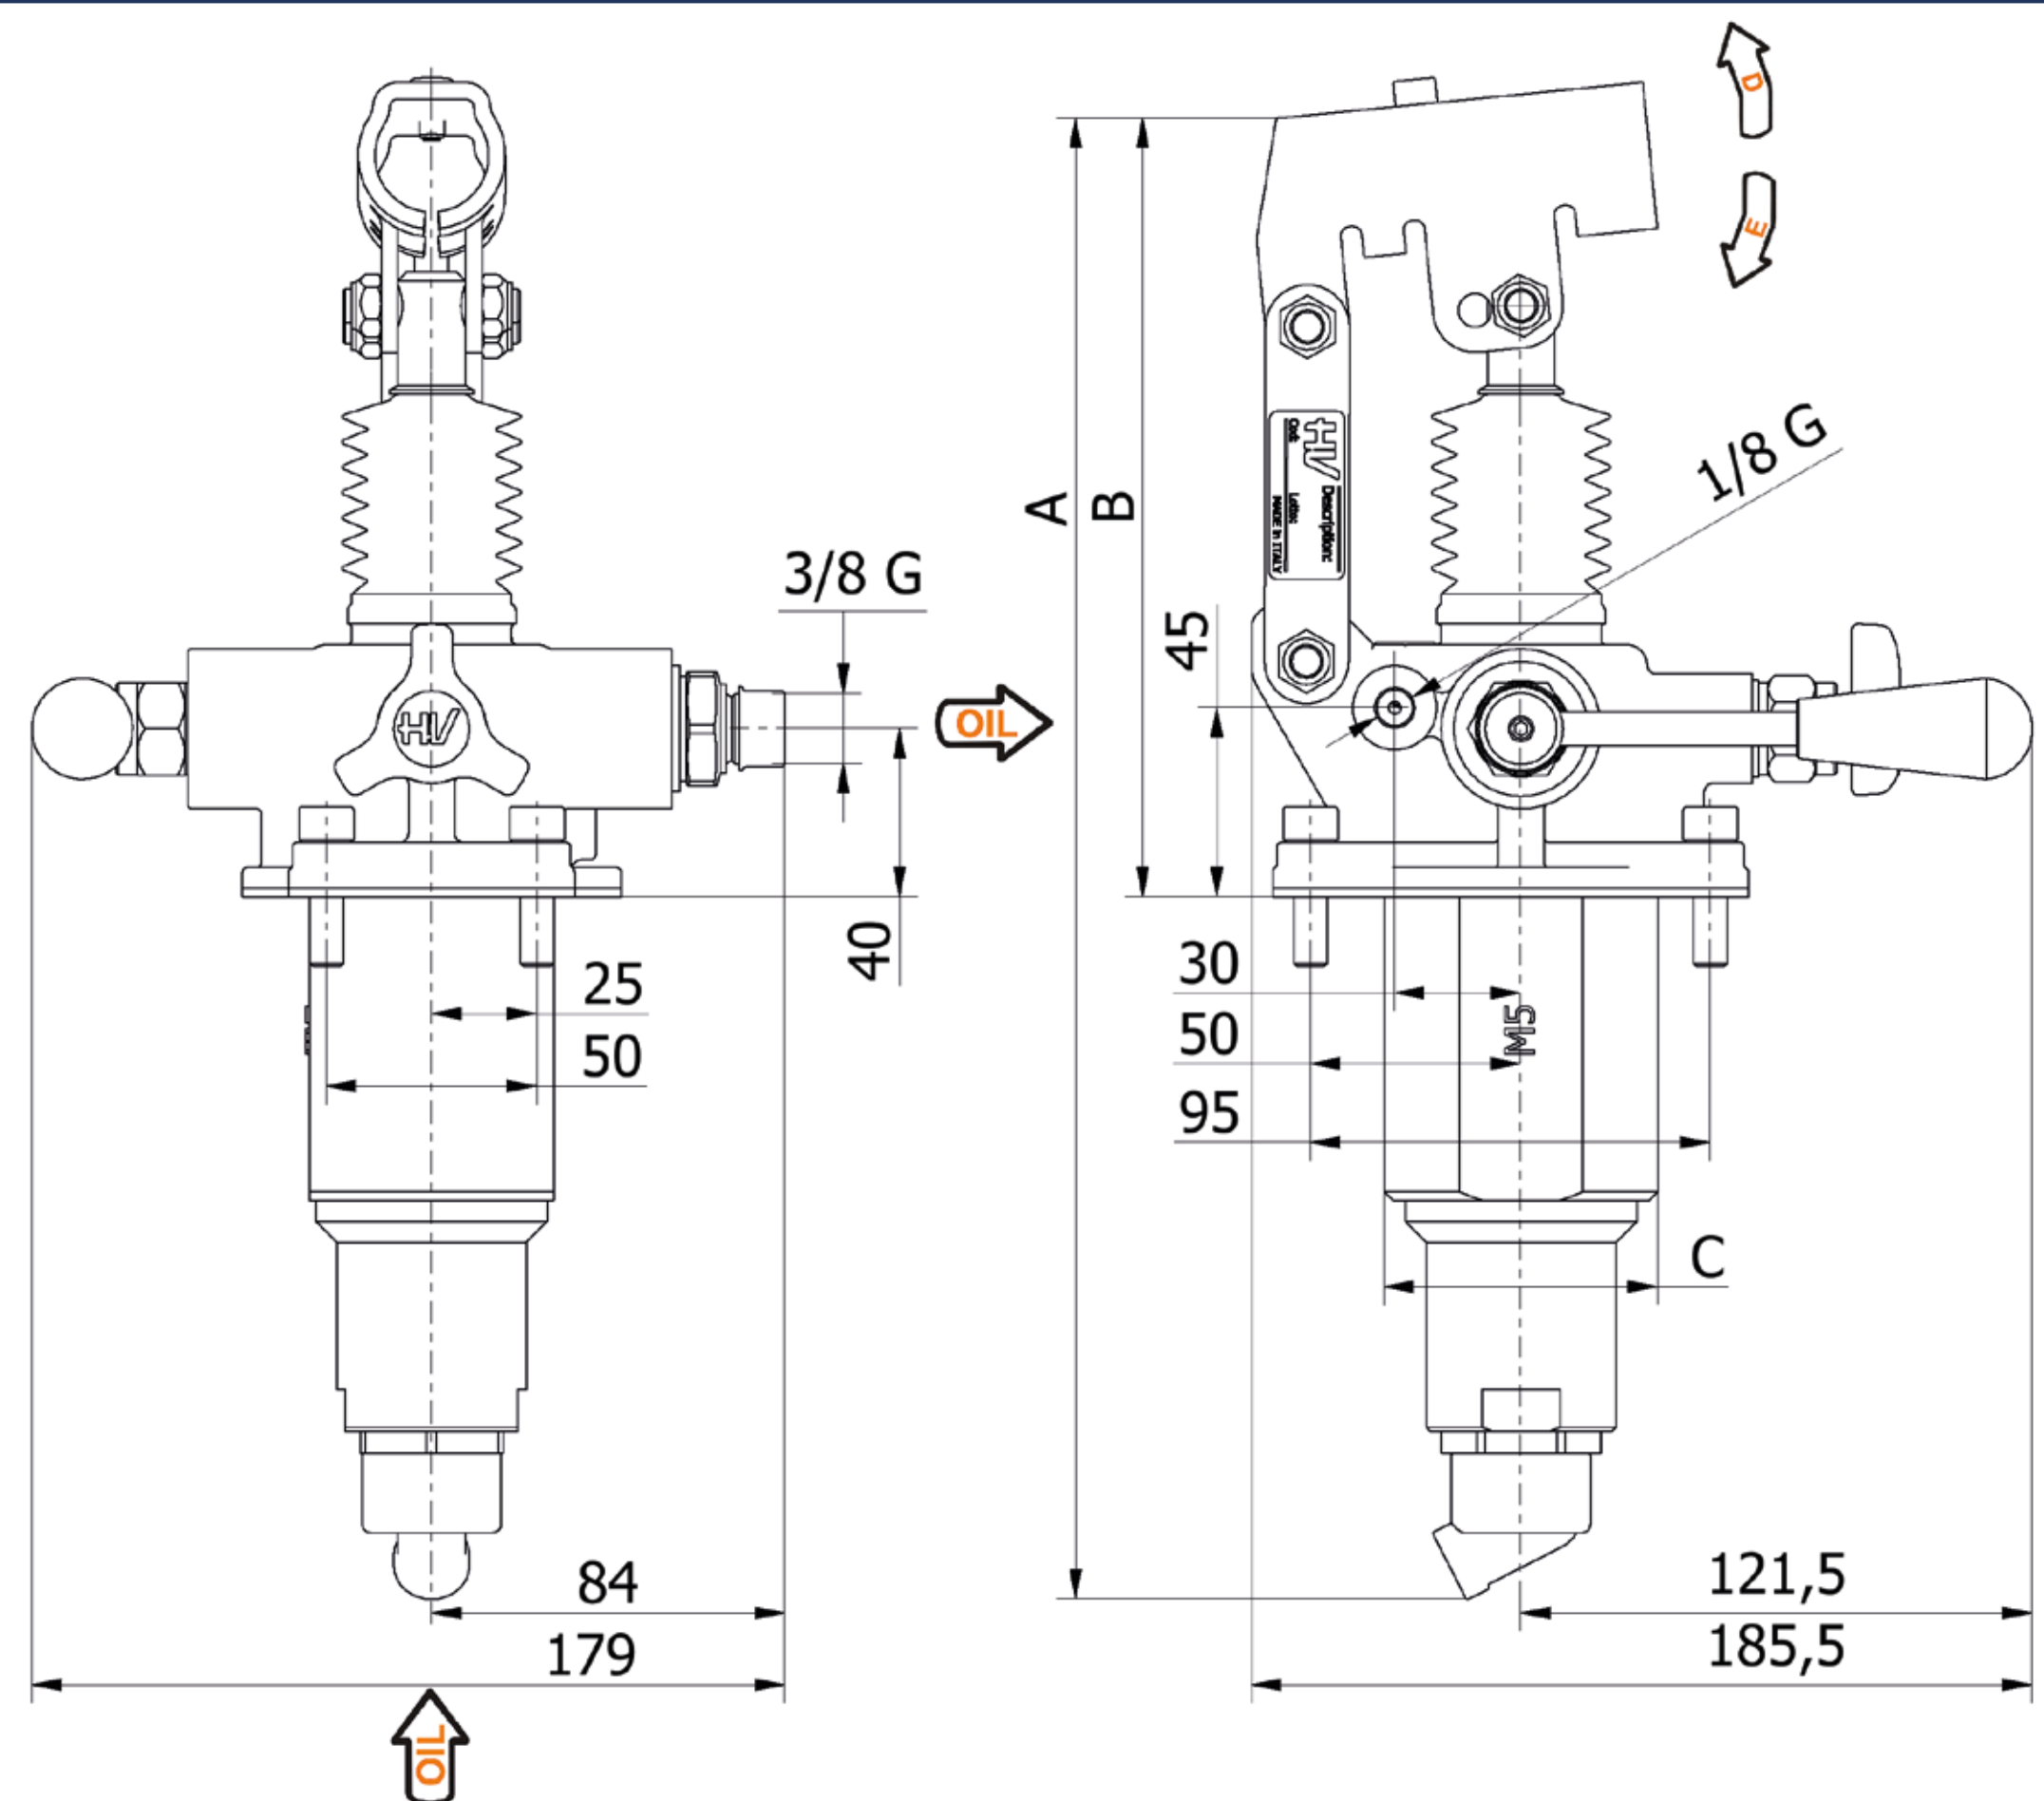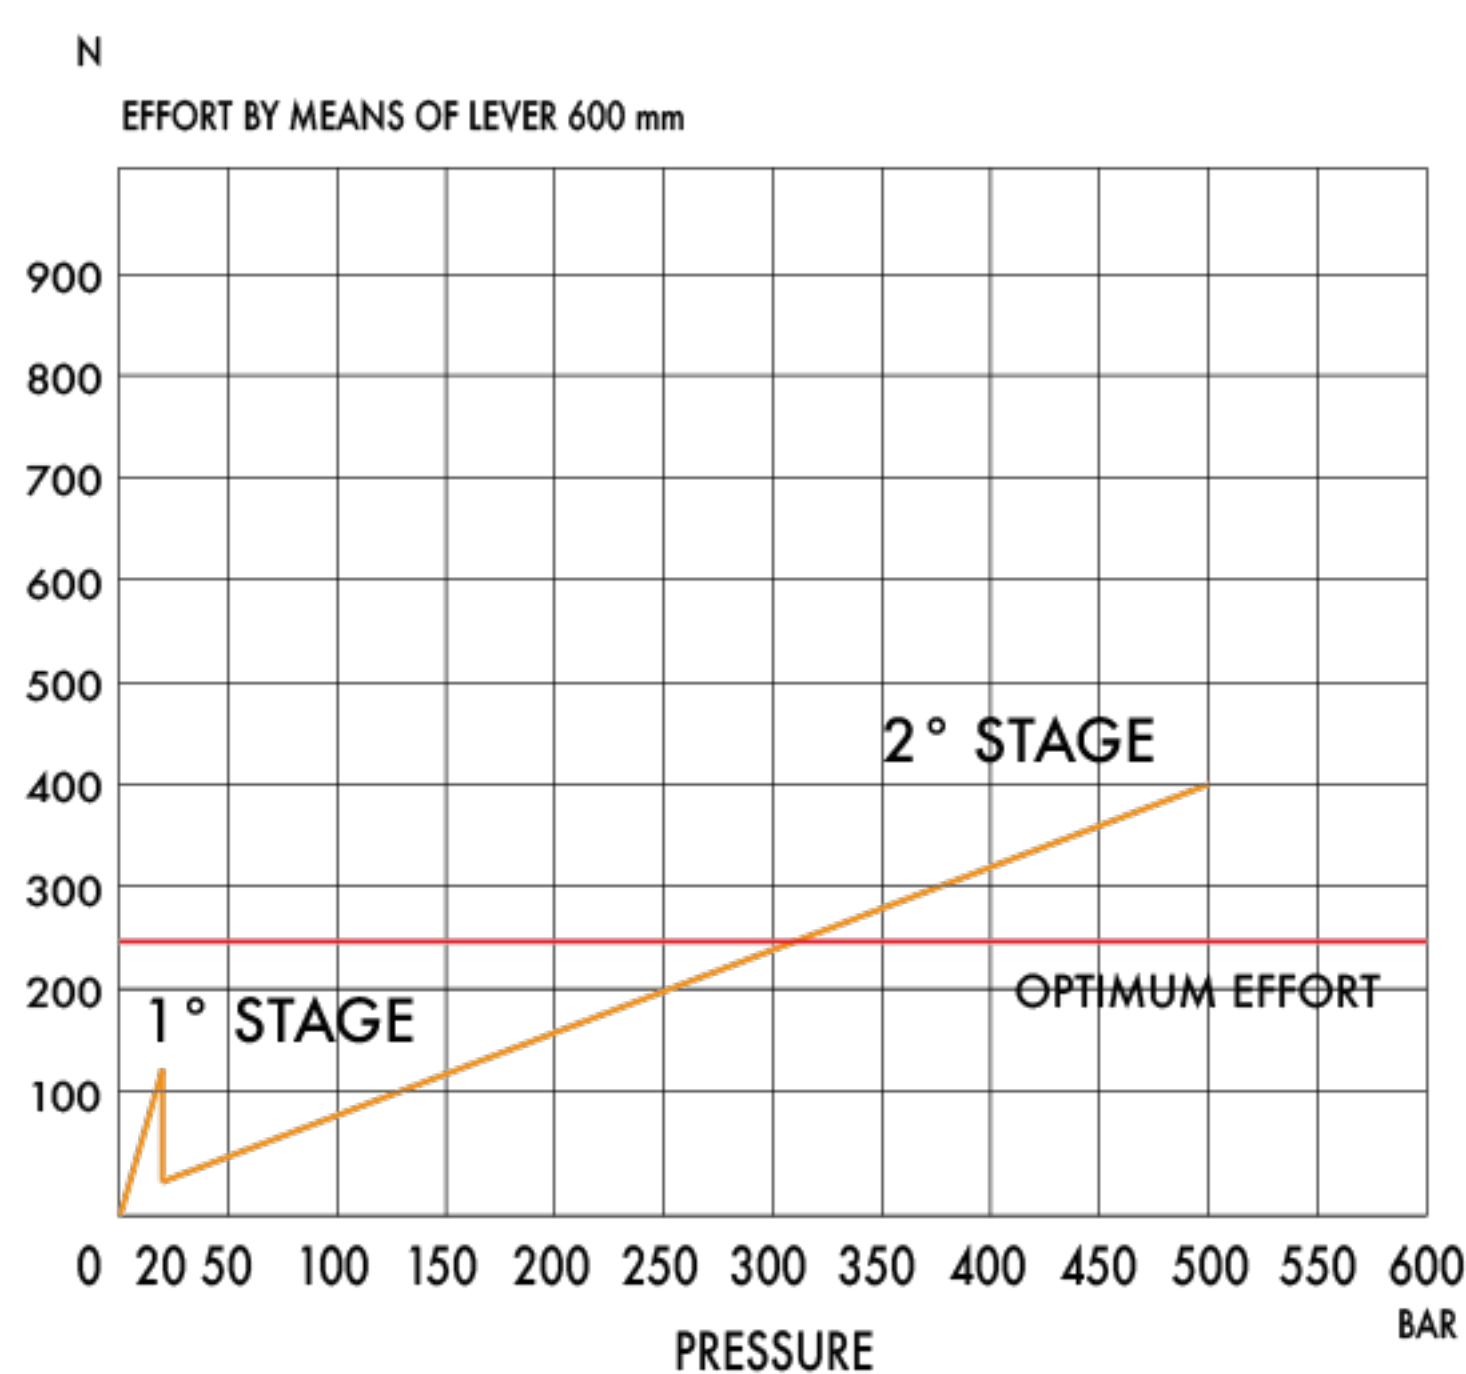[illegible]

Hand pumps

PM2V 5-80 Lm-M-s

Tech sheet



DETAILS

with release hand knob
 with exclusion lever for the 1st speed
 with pressure-gauge
 two speed hand pump for a single acting cylinder
 for fixing to tank



SPECIFICATIONS

Cast iron body
 Piston treated with Niploy
 White zinc plated support lever
 Lever connection Ø 27
 White zinc plated external parts
 Standard colour black
 Oil tank mounting kit included

HYDRAULIC DIAGRAM

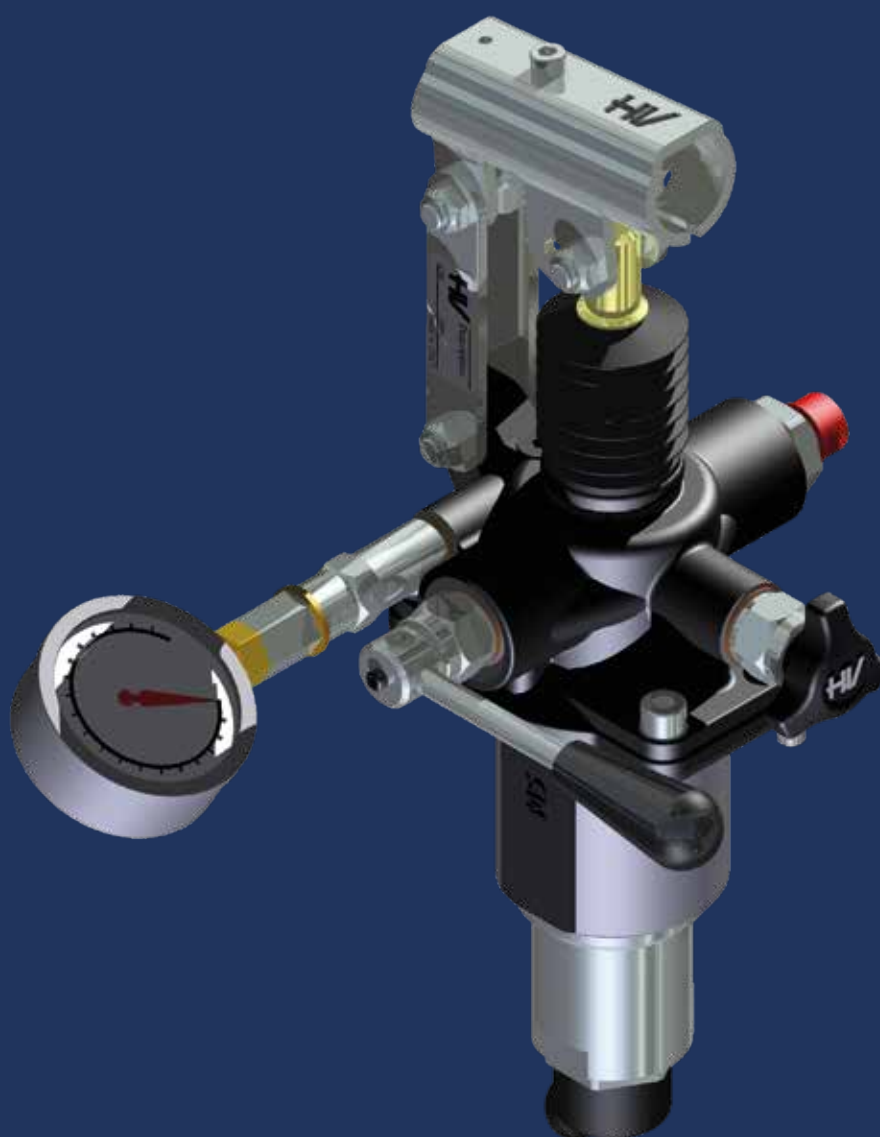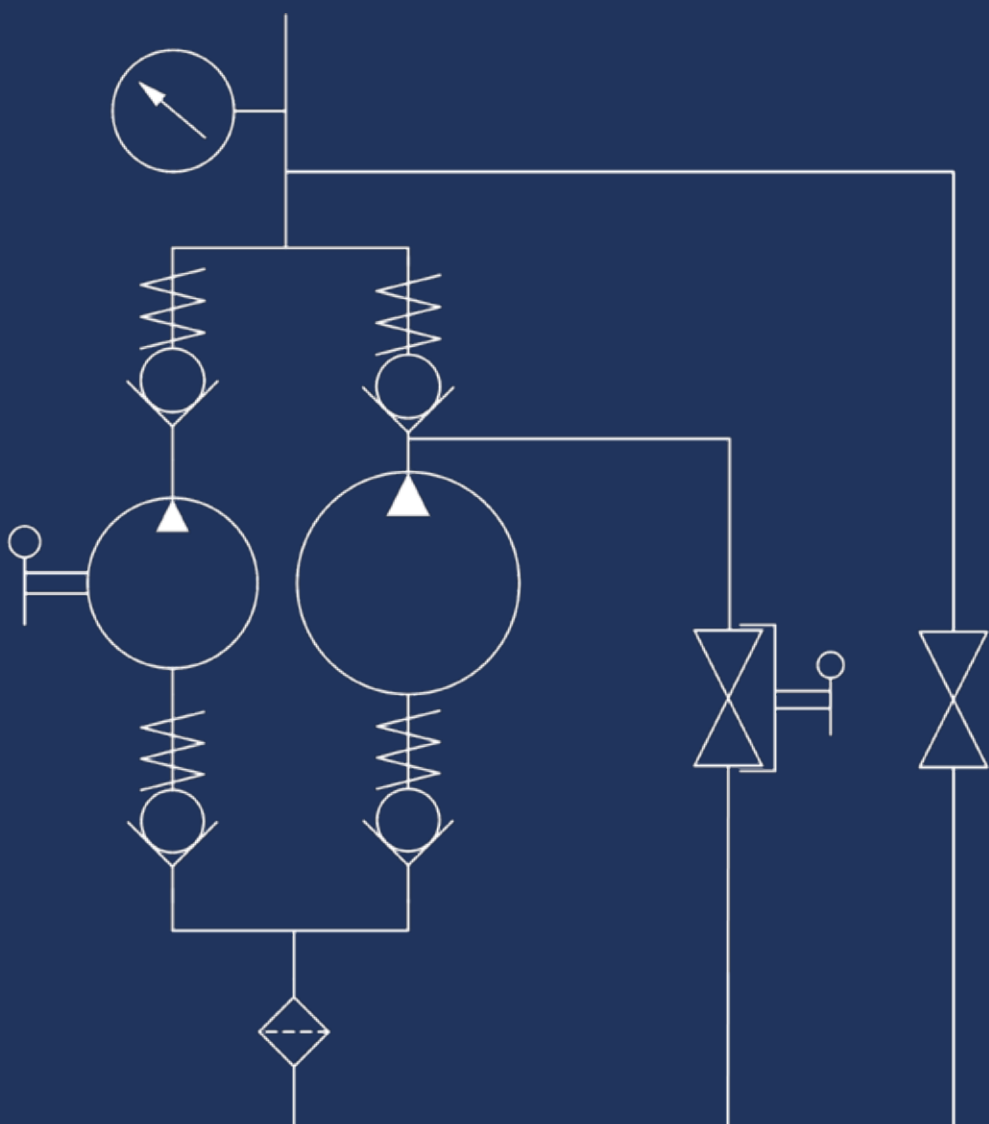

EFFORT DIAGRAM

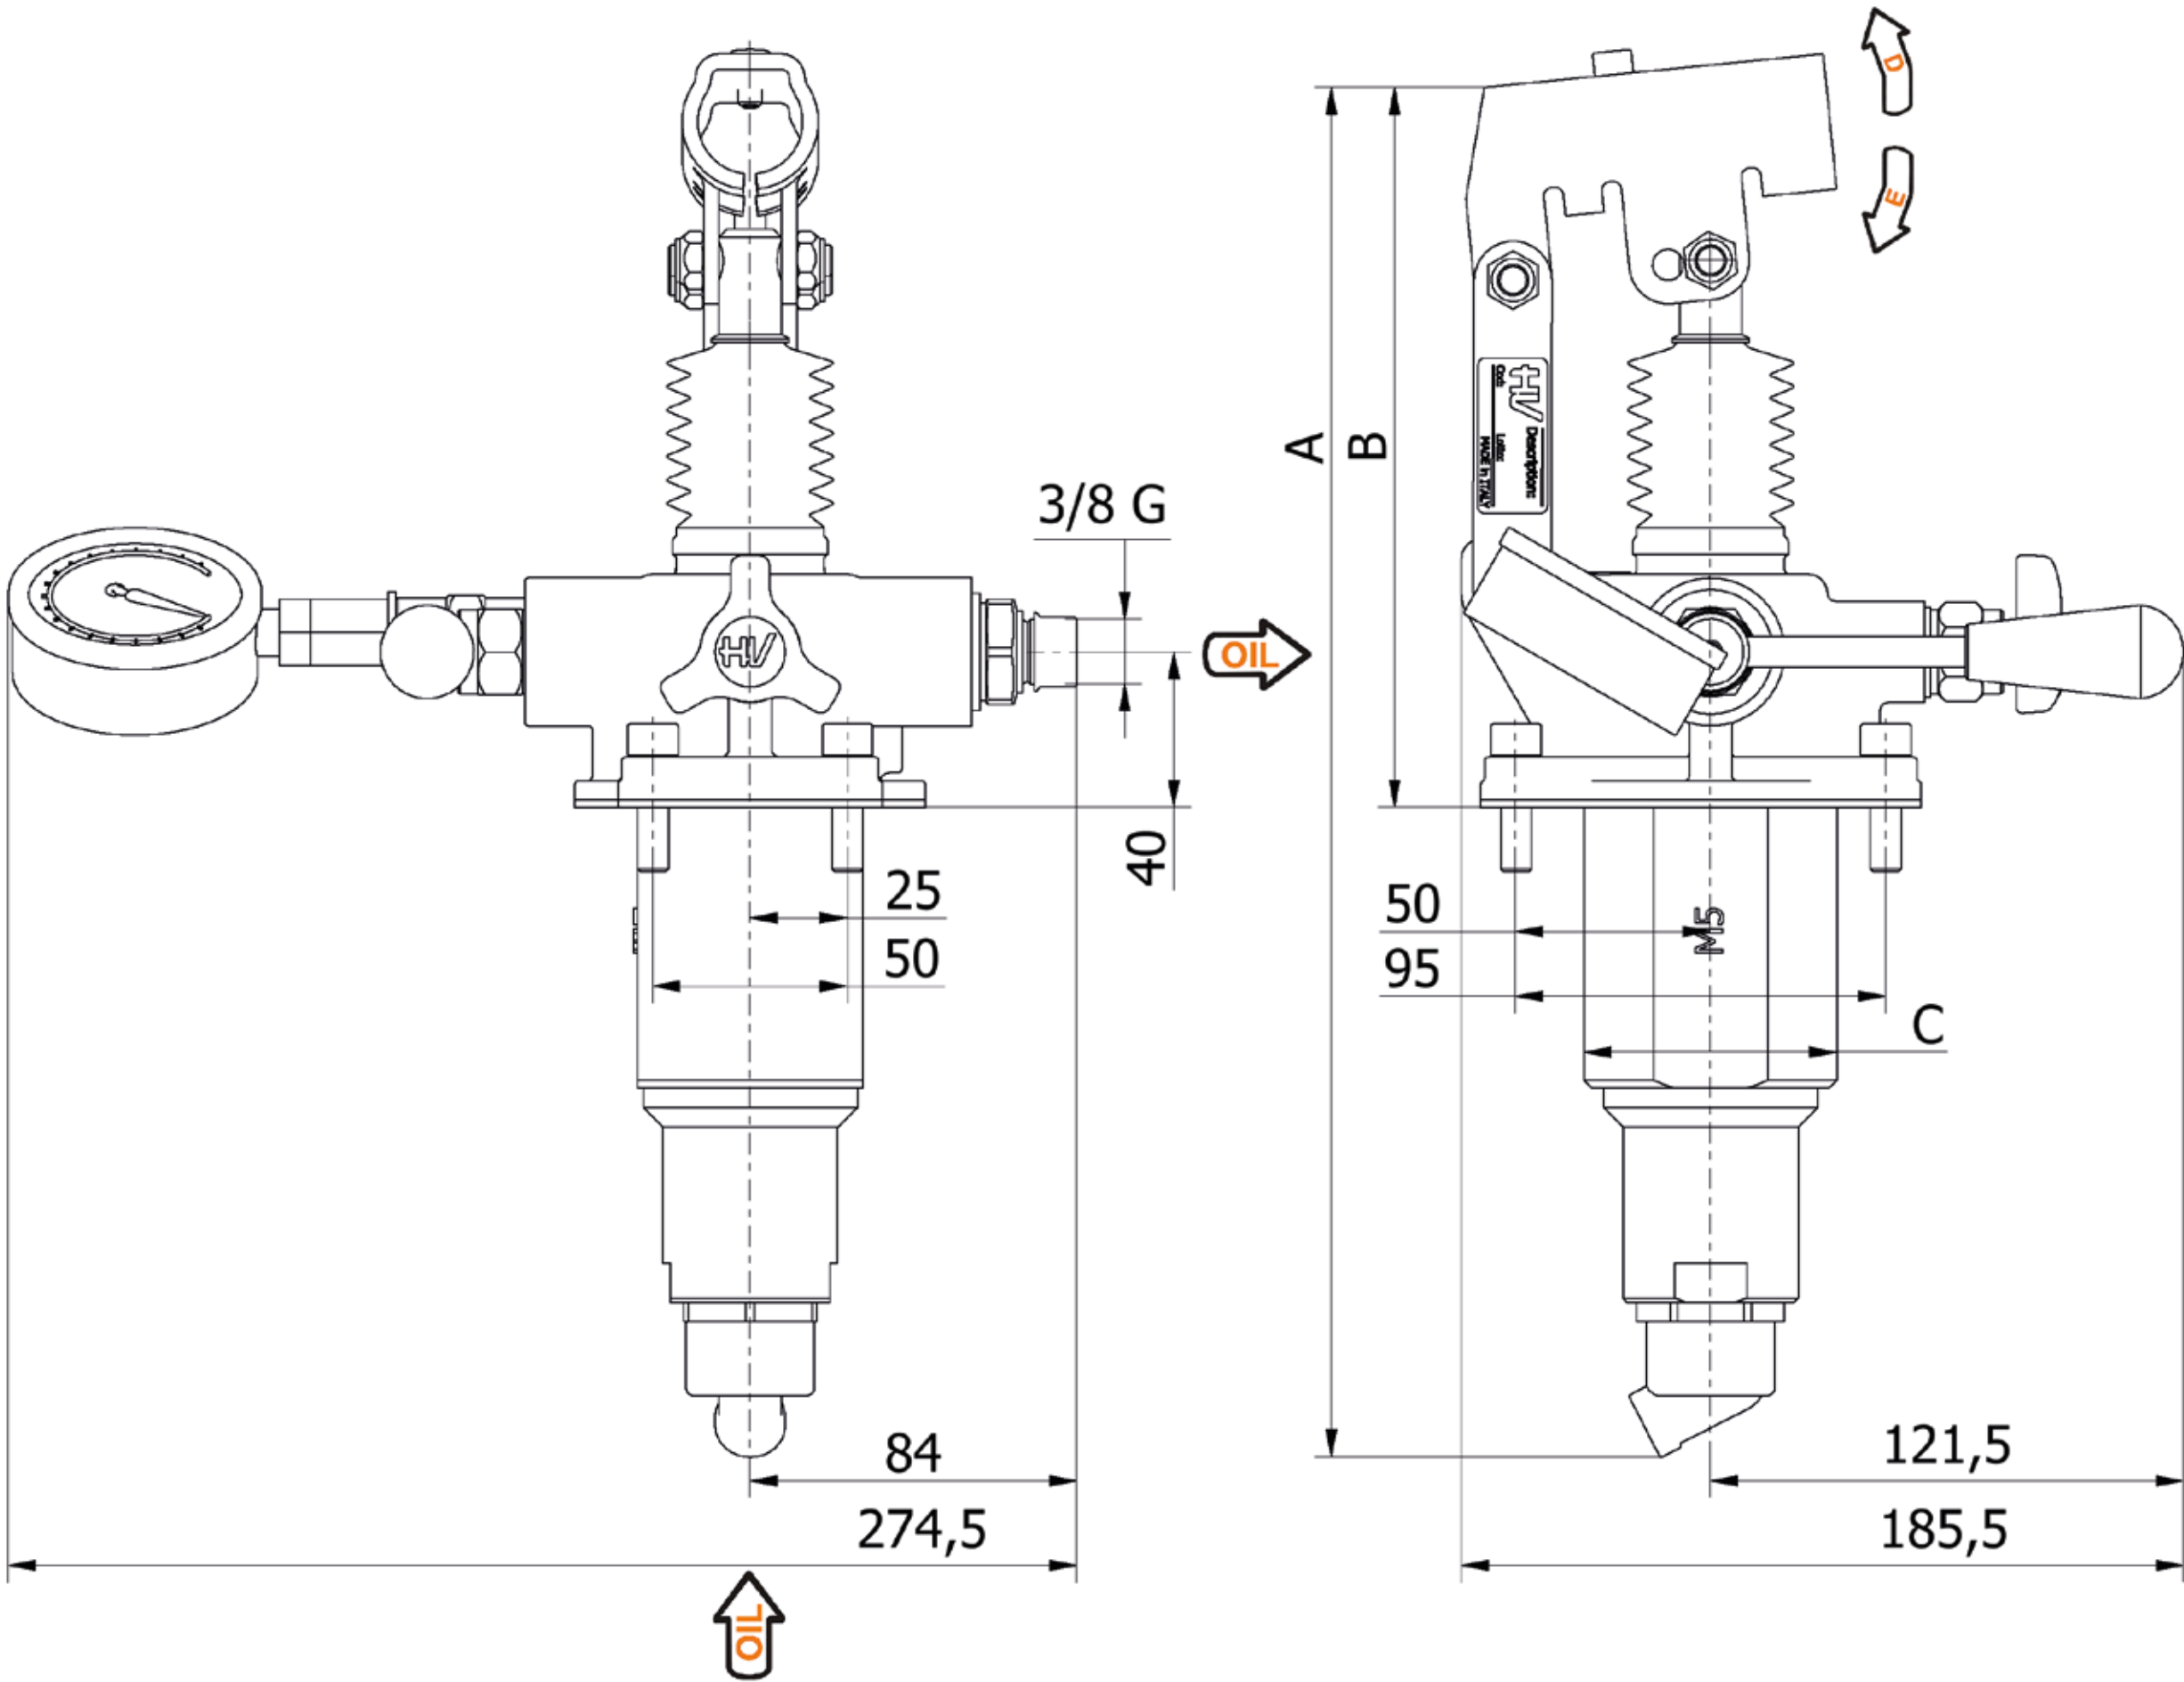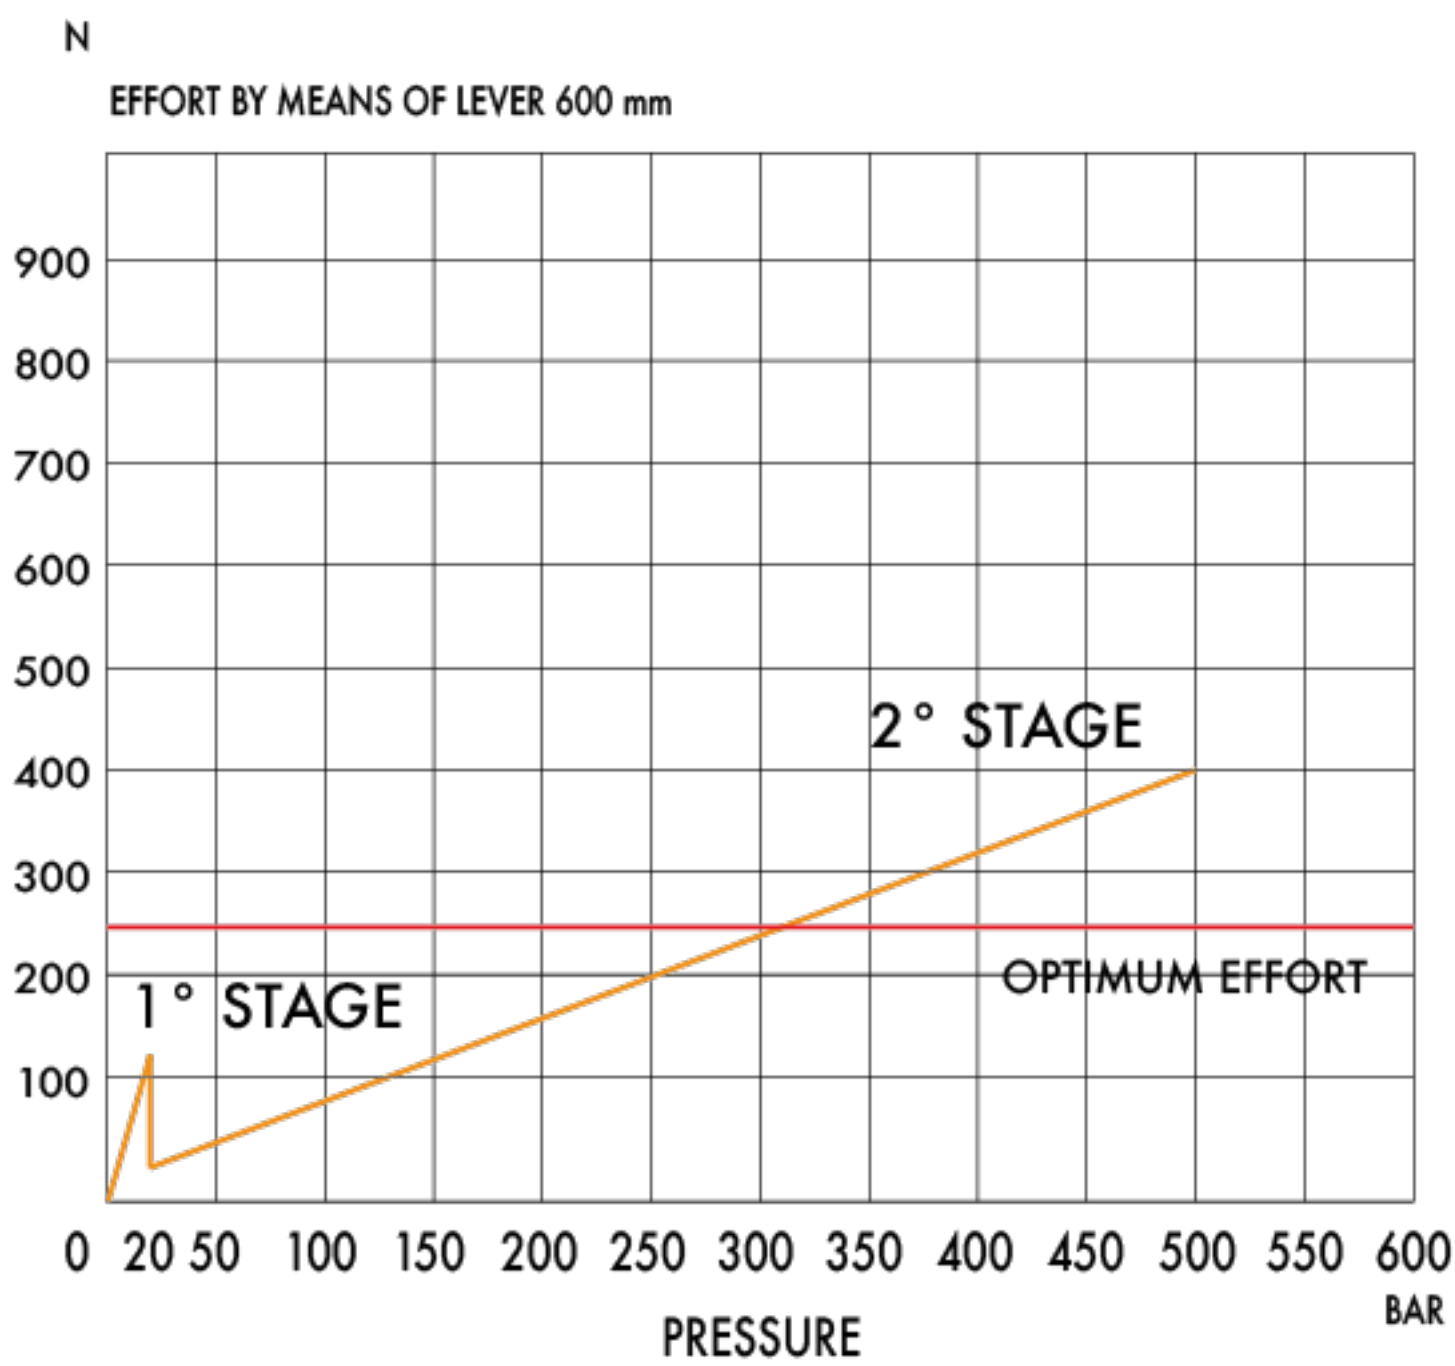


DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	DISPLACEMENT cm ³		PRESSURE BAR		MASS KG	CODE
						STAGE 1	STAGE 2	STAGE 1	STAGE 2		
5-80	354	165	65	30	32	80,588	5,036	20	500	6,200	6071.0130

Hand pumps
 PM2V 5-80 Lm-byB-pm-s
 Tech sheet



DETAILS
 with release hand knob
 with exclusion lever for the 1st speed
 with pressure relief valve and pressure-gauge
 prearrangement two speed hand pump for a single acting cylinder for fixing to tank

SPECIFICATIONS
 Cast iron body
 Piston treated with Niploy
 White zinc plated support lever
 Lever connection Ø 27
 White zinc plated external parts
 Standard colour black
 Oil tank mounting kit included
 Pressure relief valve standard setting: 400 bar
 With pressure-gauge prearrangement, connection: 1/4 G

HYDRAULIC DIAGRAM

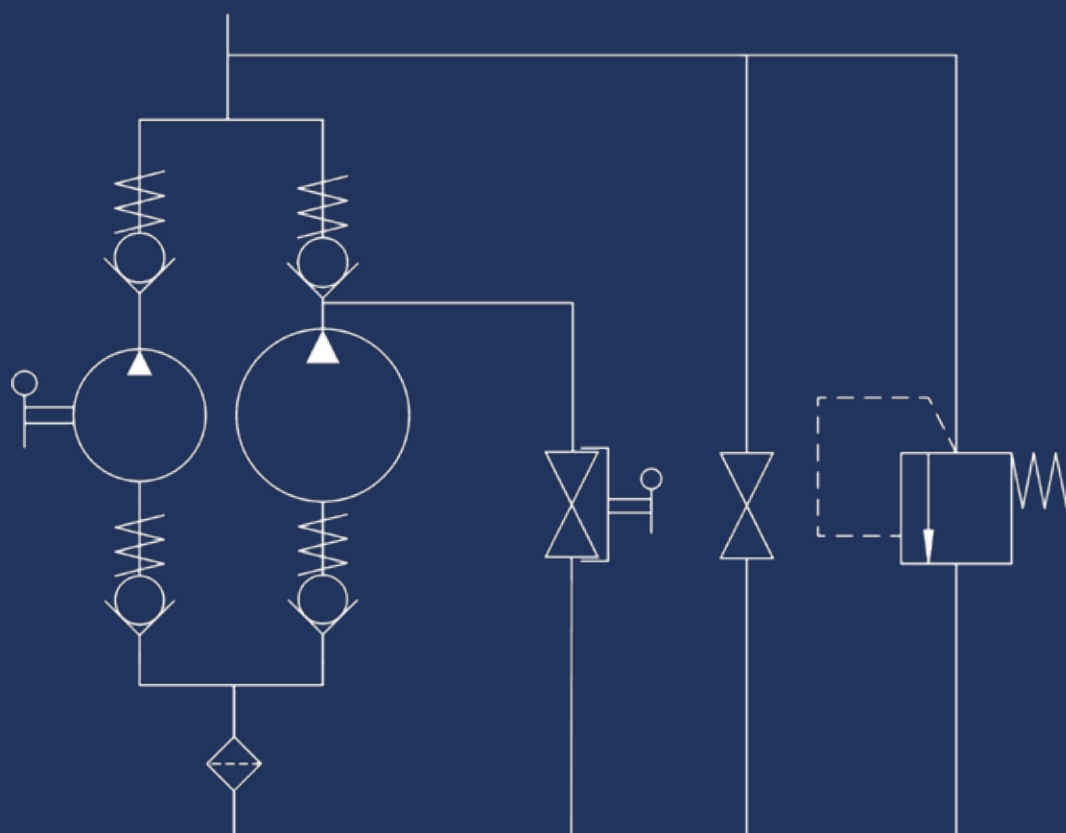

EFFORT DIAGRAM

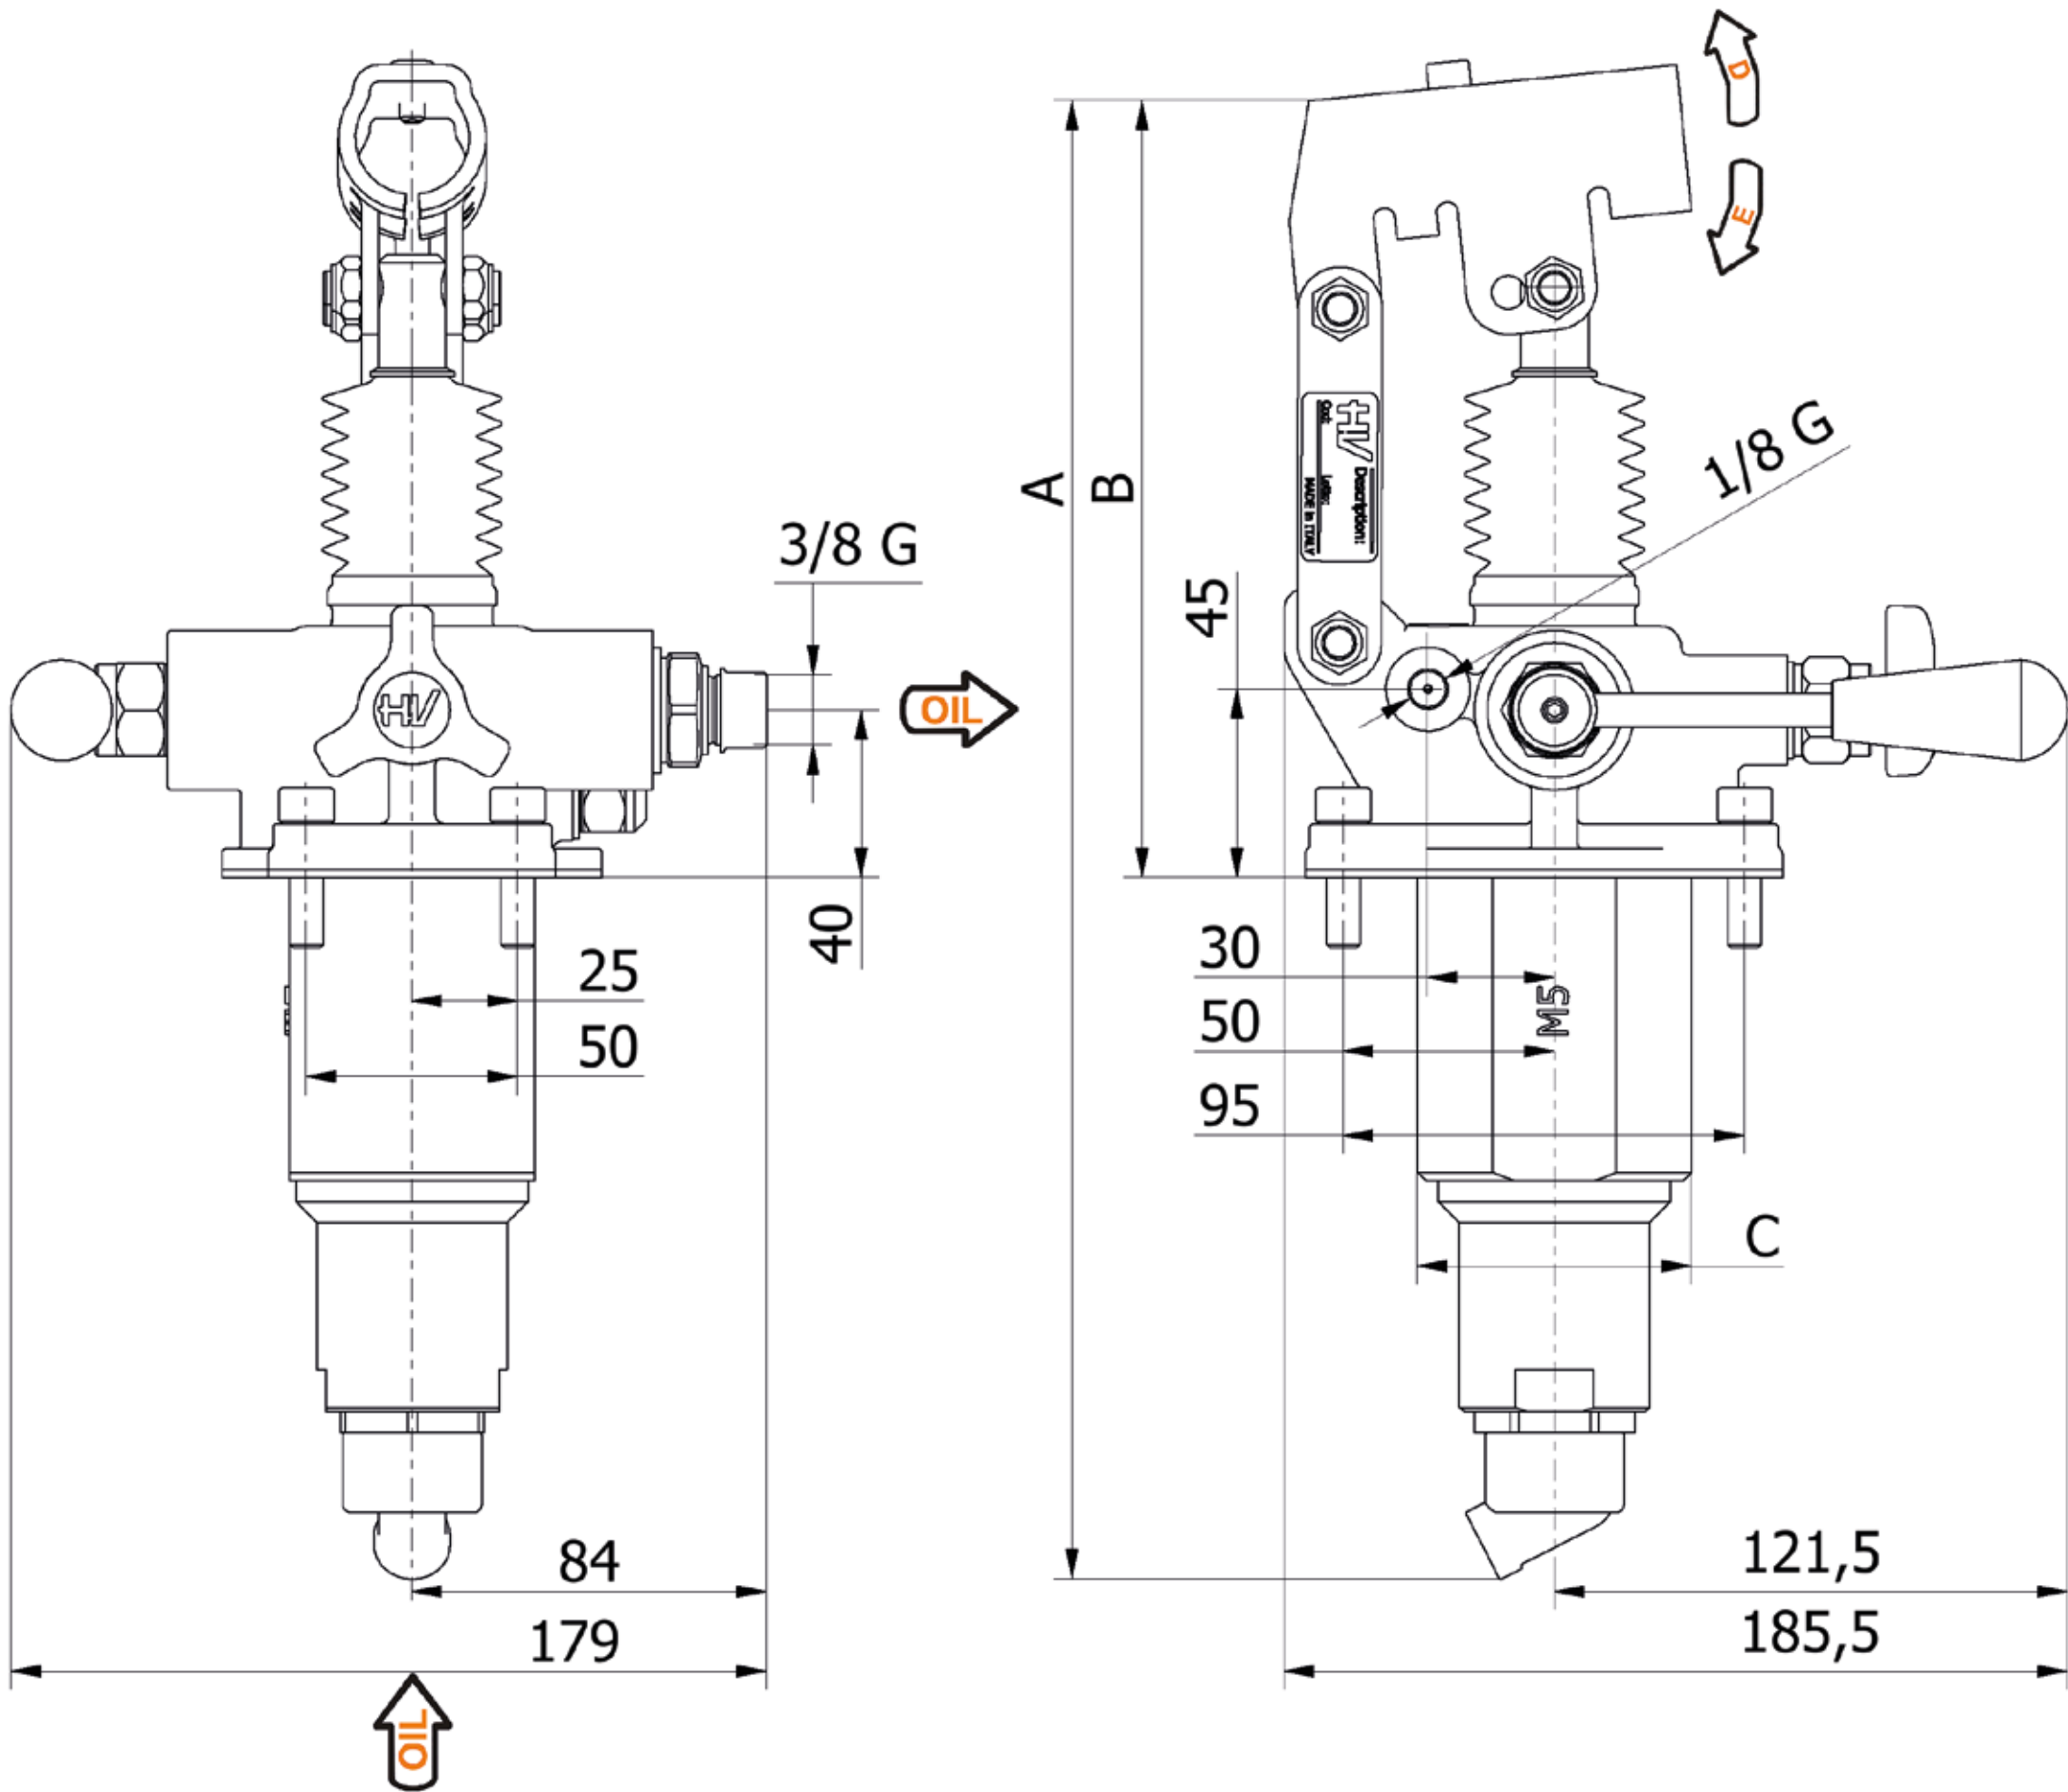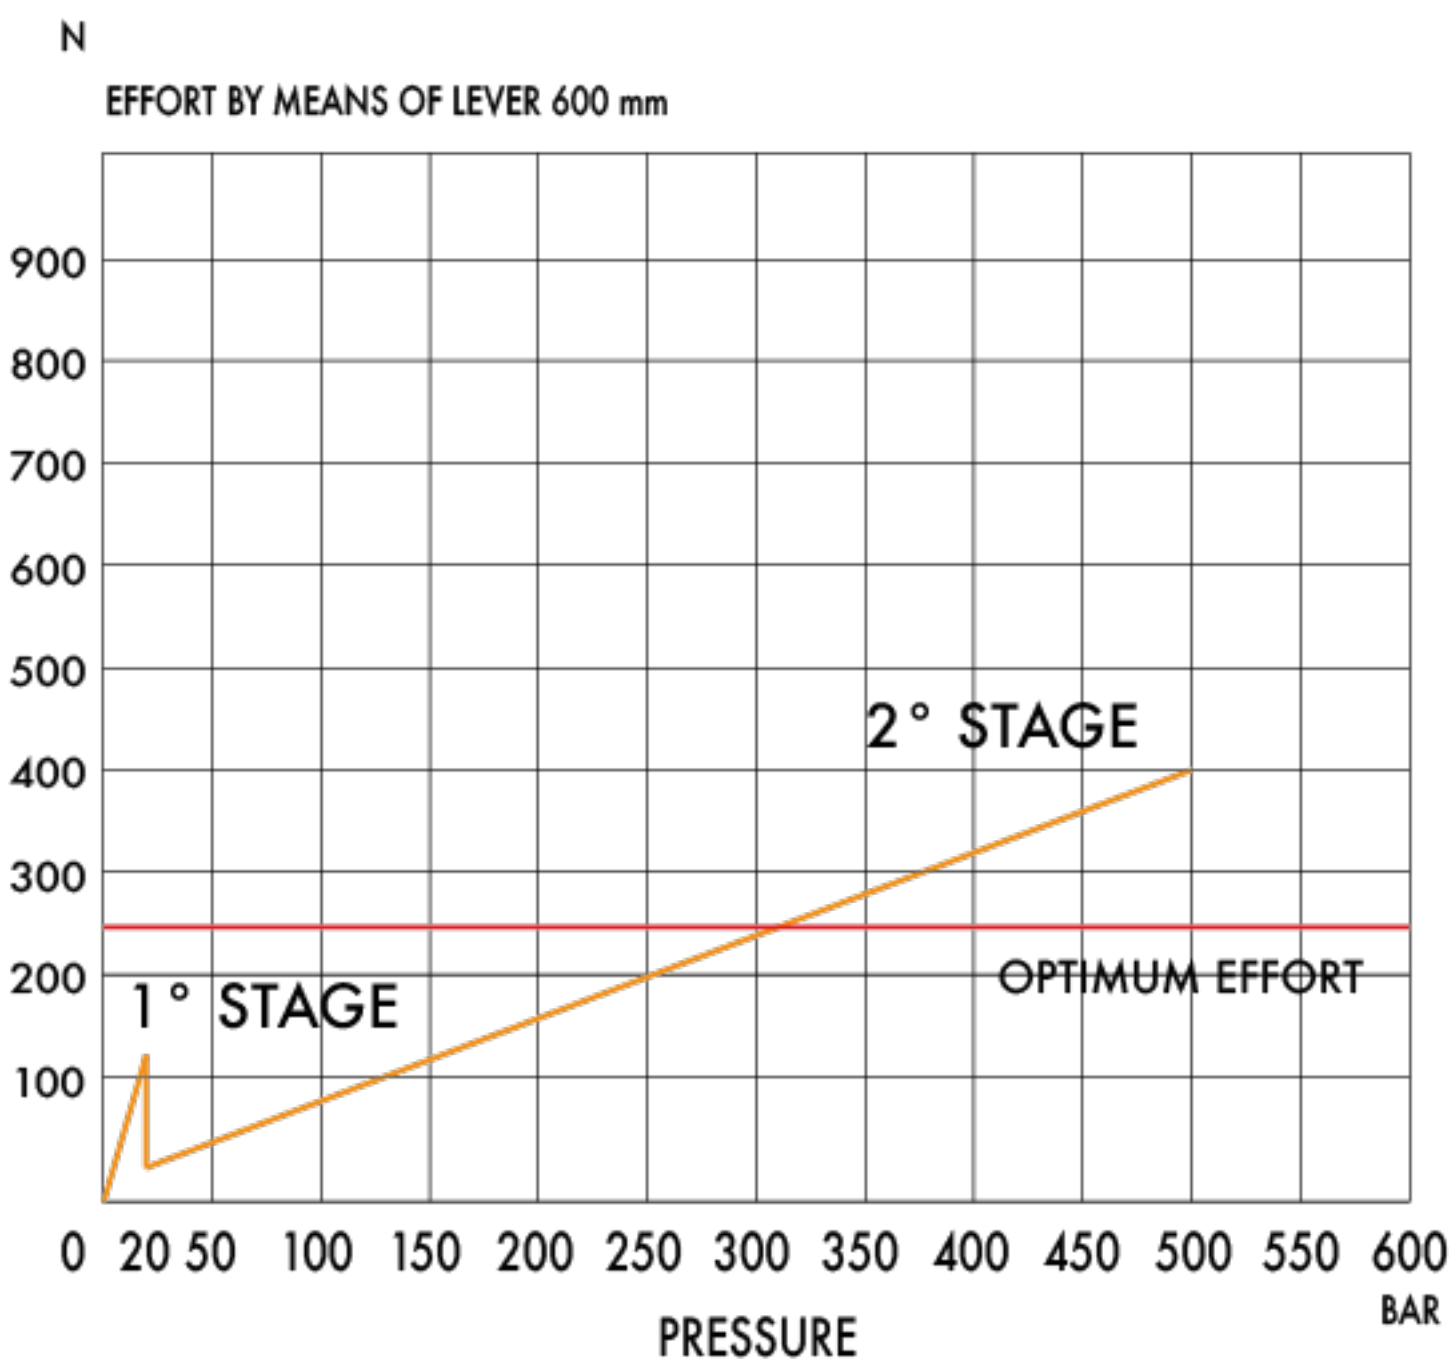

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	DISPLACEMENT cm ³		PRESSURE BAR		MASS KG	CODE
						STAGE 1	STAGE 2	STAGE 1	STAGE 2		
5-80	354	165	65	30	32	80,588	5,036	20	500	6,200	6071.0131

Hand pumps

PM2V 5-80 Lm-byB-M-s

Tech sheet


DETAILS

- with release hand knob
- with exclusion lever for the 1st speed
- with pressure relief valve and pressure-gauge two speed
- hand pump for a single acting cylinder for fixing to tank



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included
Pressure relief valve standard
setting: 400 bar

HYDRAULIC DIAGRAM

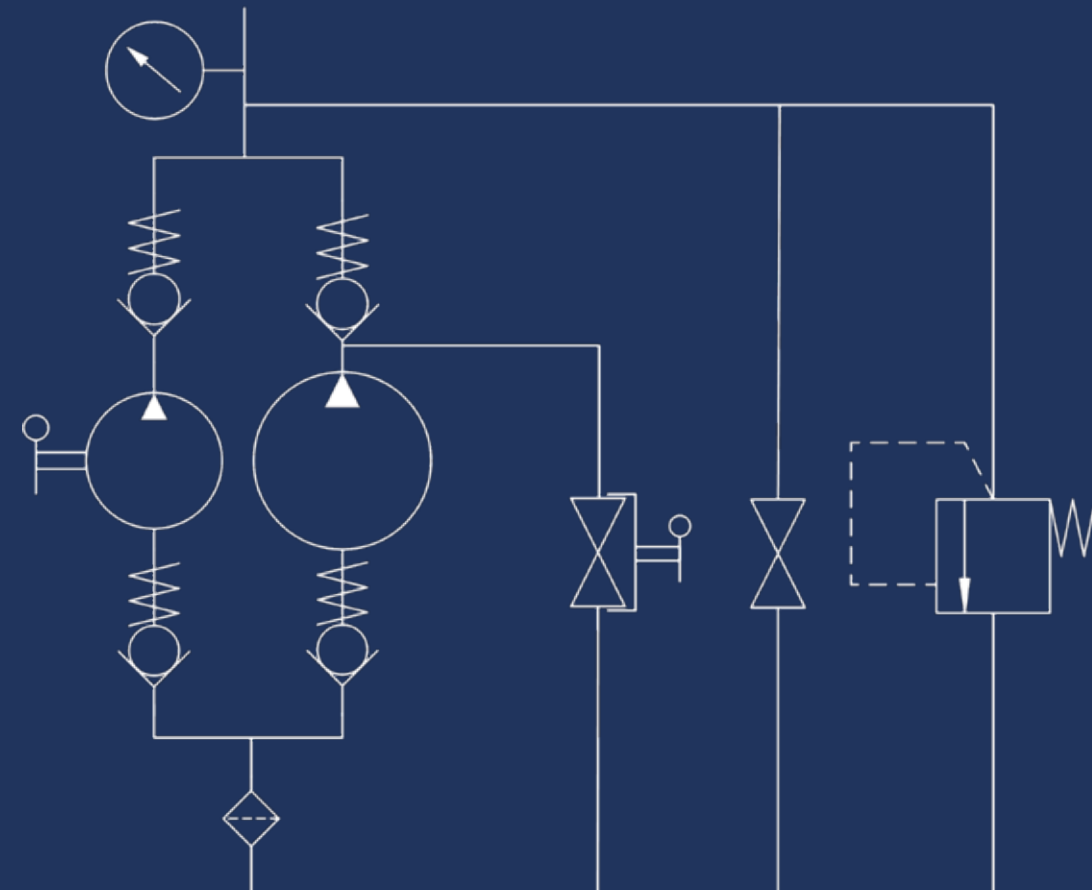

EFFORT DIAGRAM

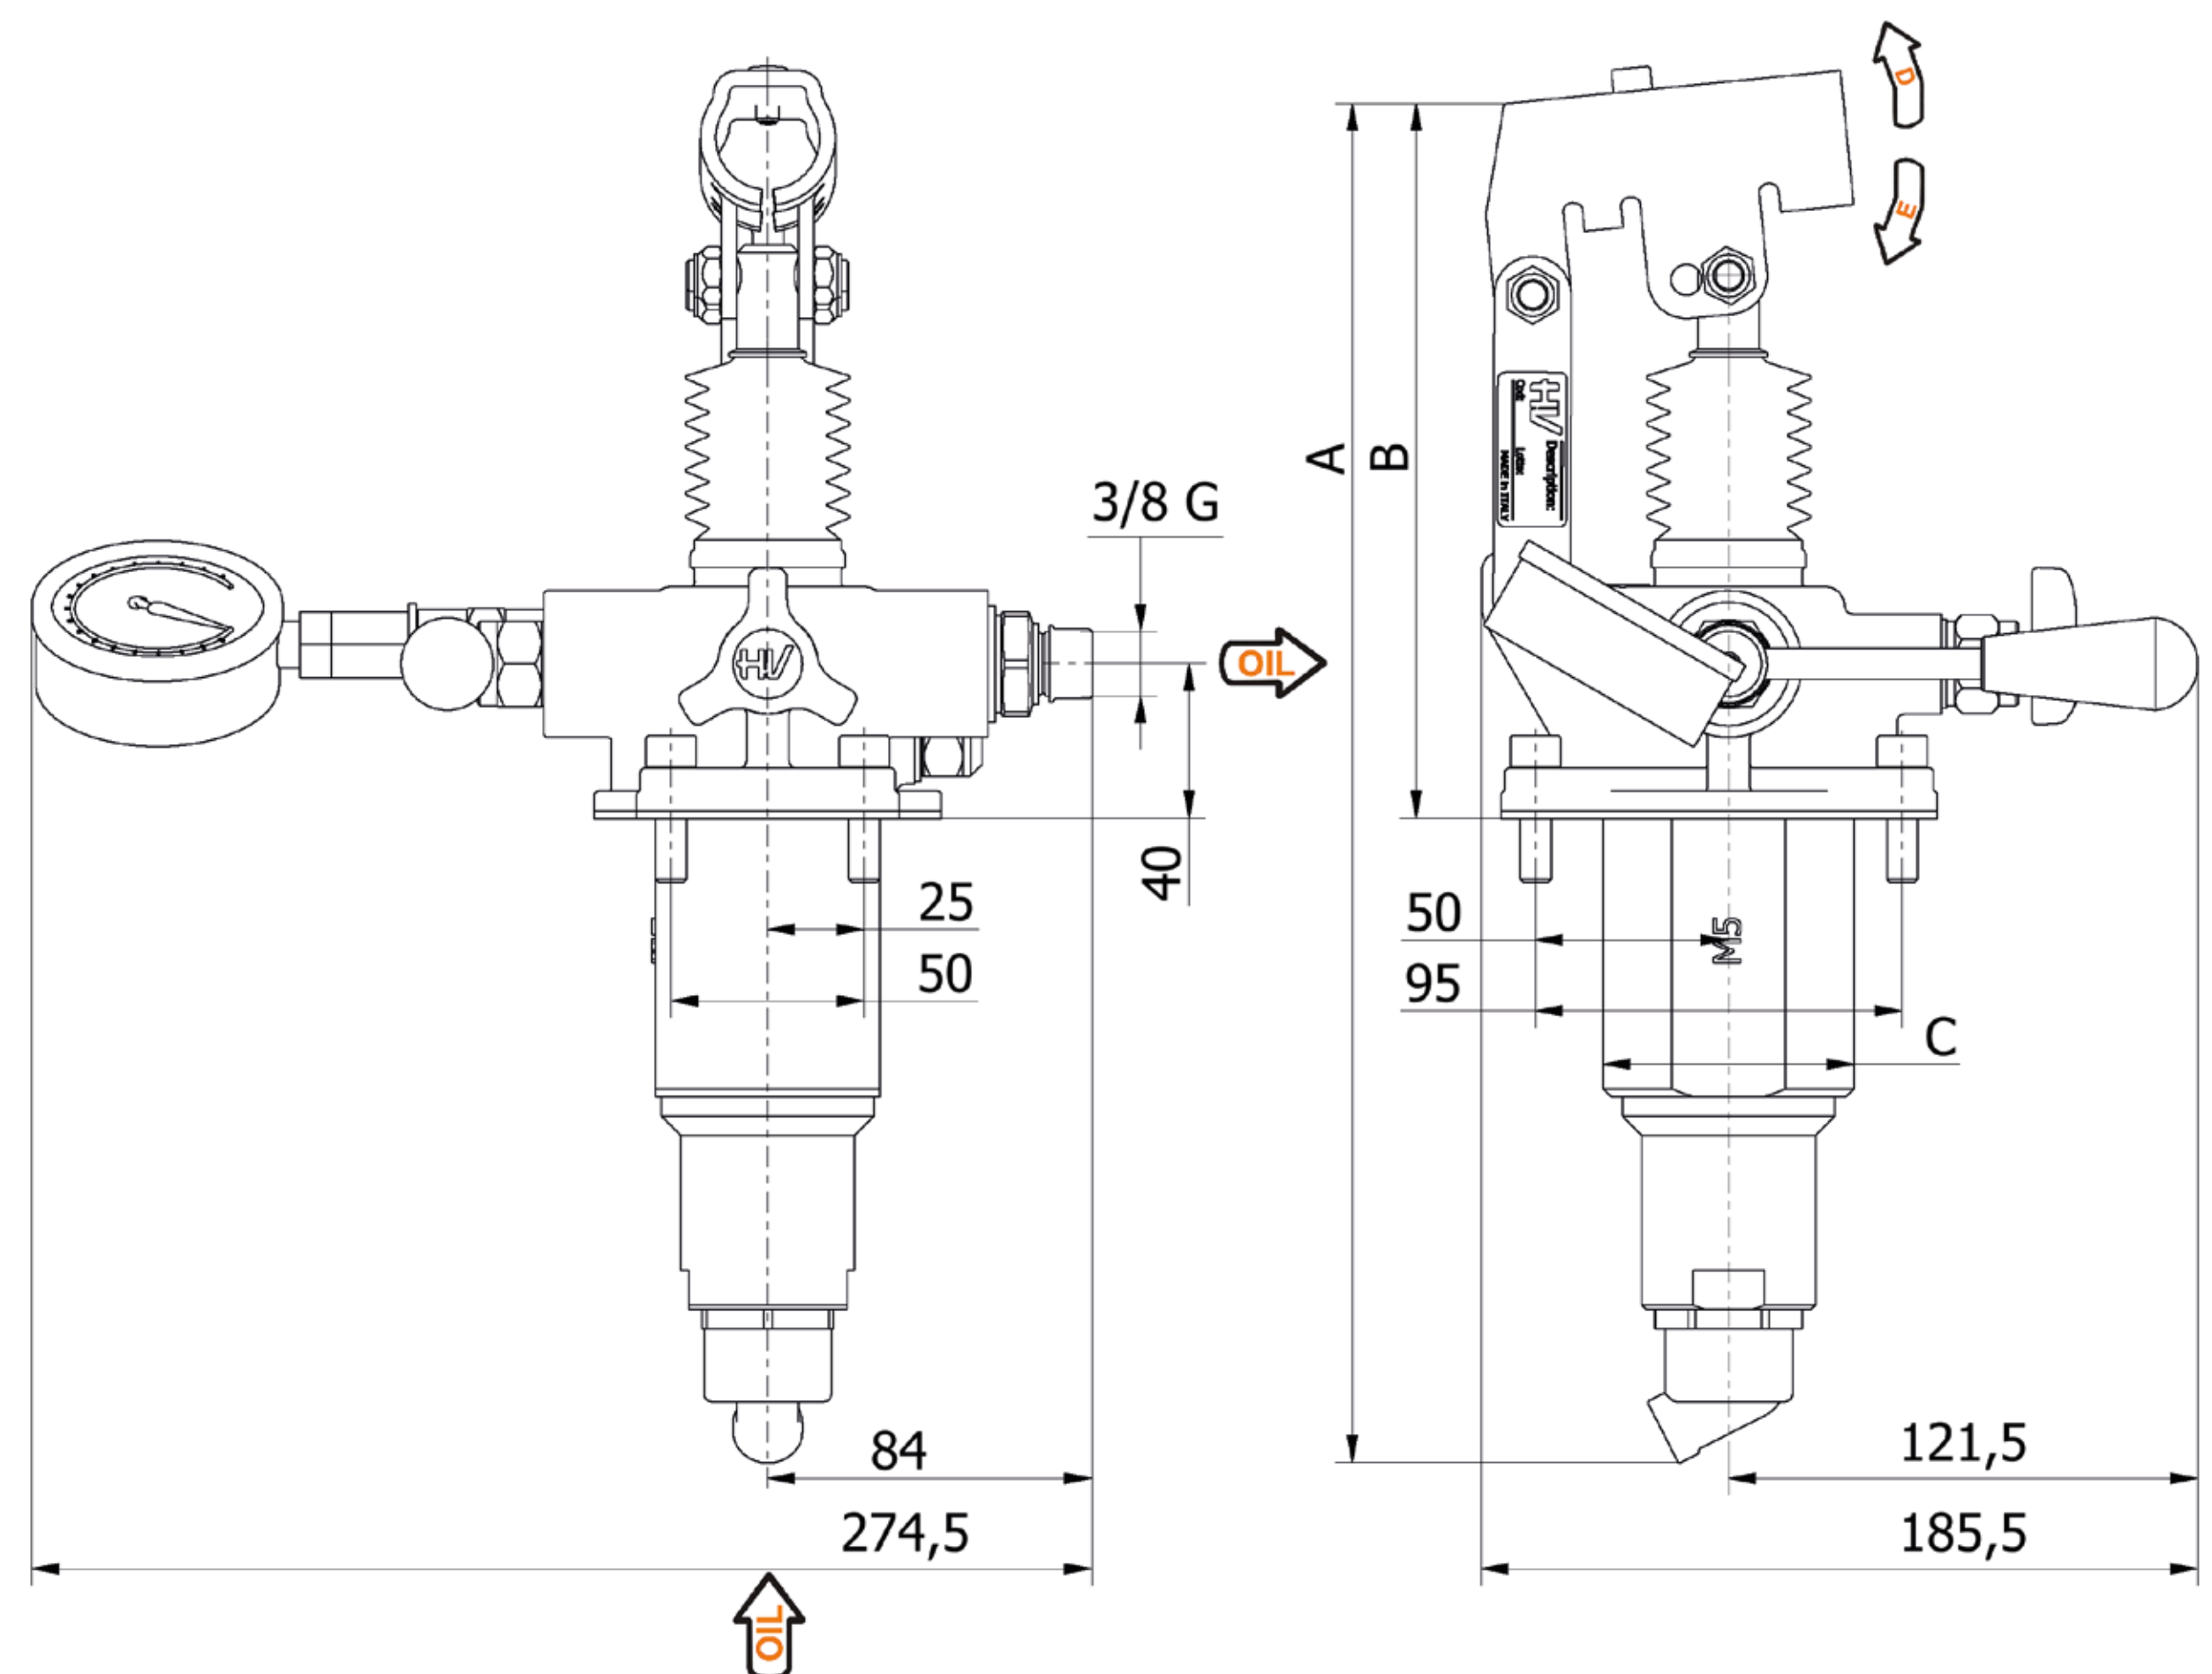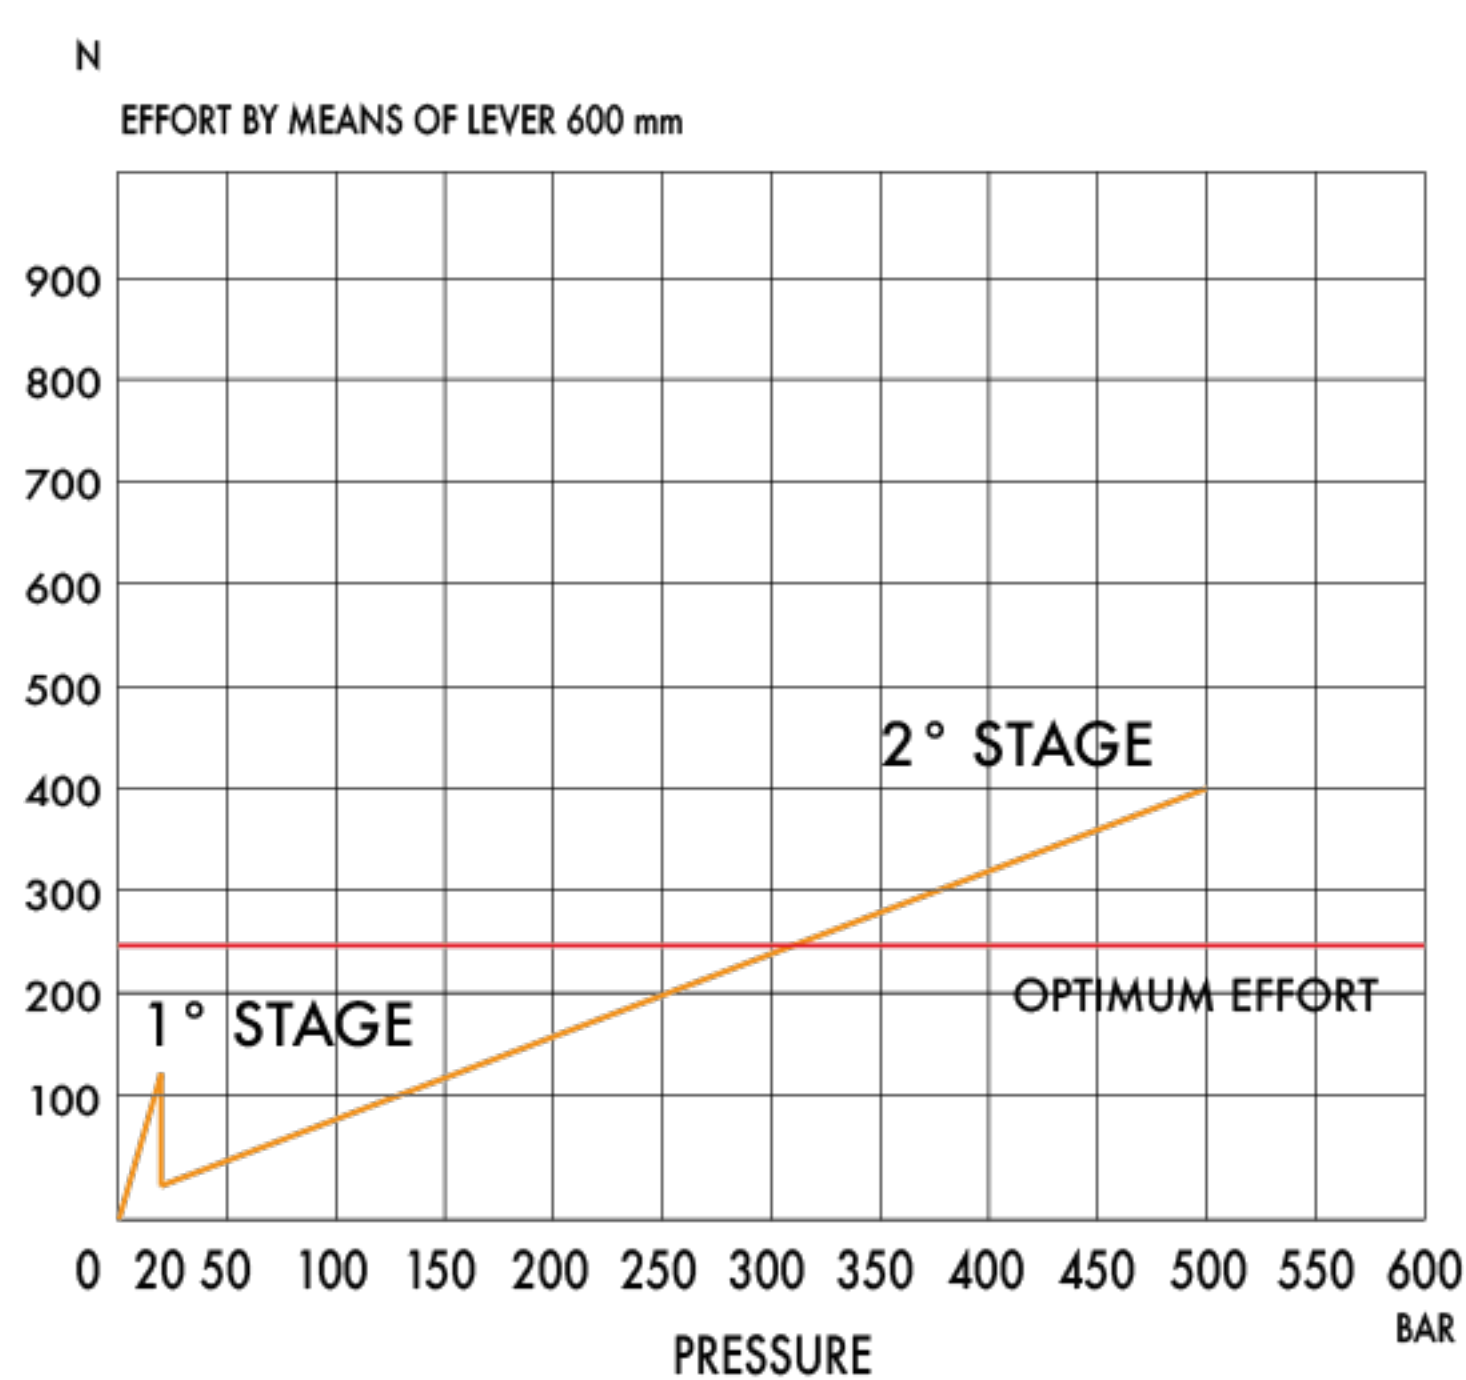[illegible]

Hand pumps

PM2V 5-80 a-s

Tech sheet


DETAILS

- with release hand knob
- with automatic control for the 1st speed
- two speed hand pump for a single acting cylinder
- for fixing to tank



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included

HYDRAULIC DIAGRAM

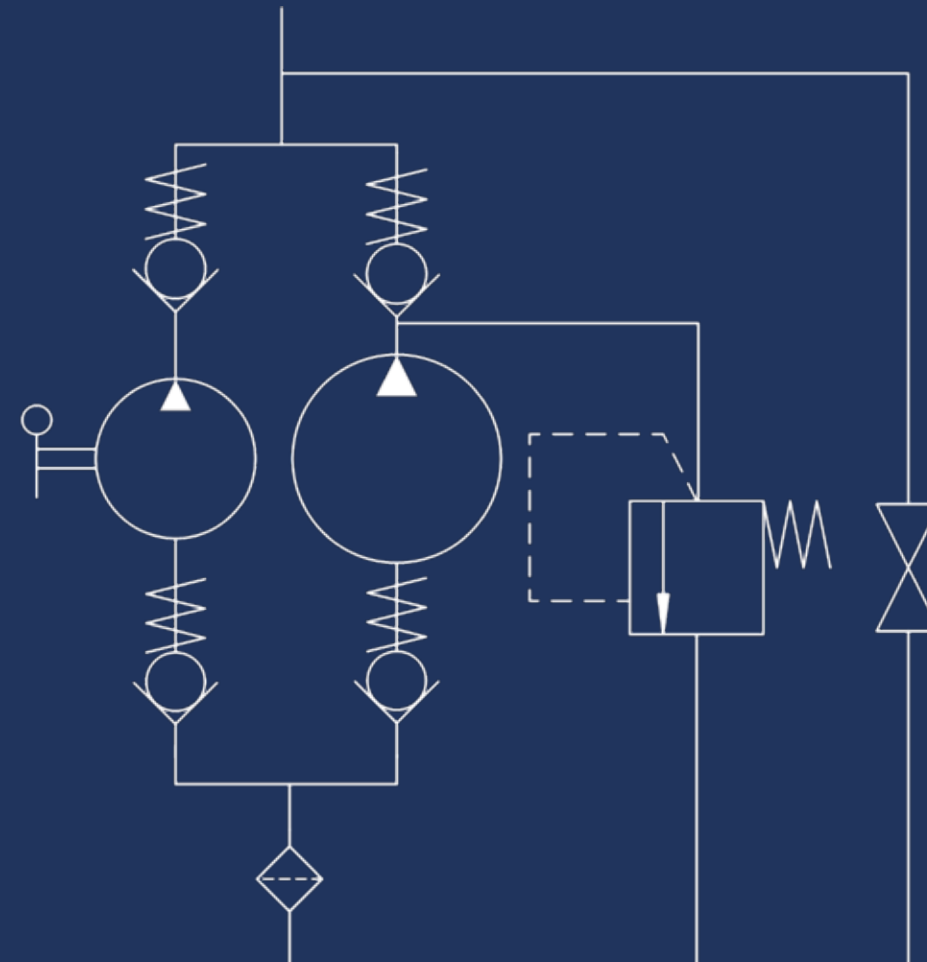

EFFORT DIAGRAM

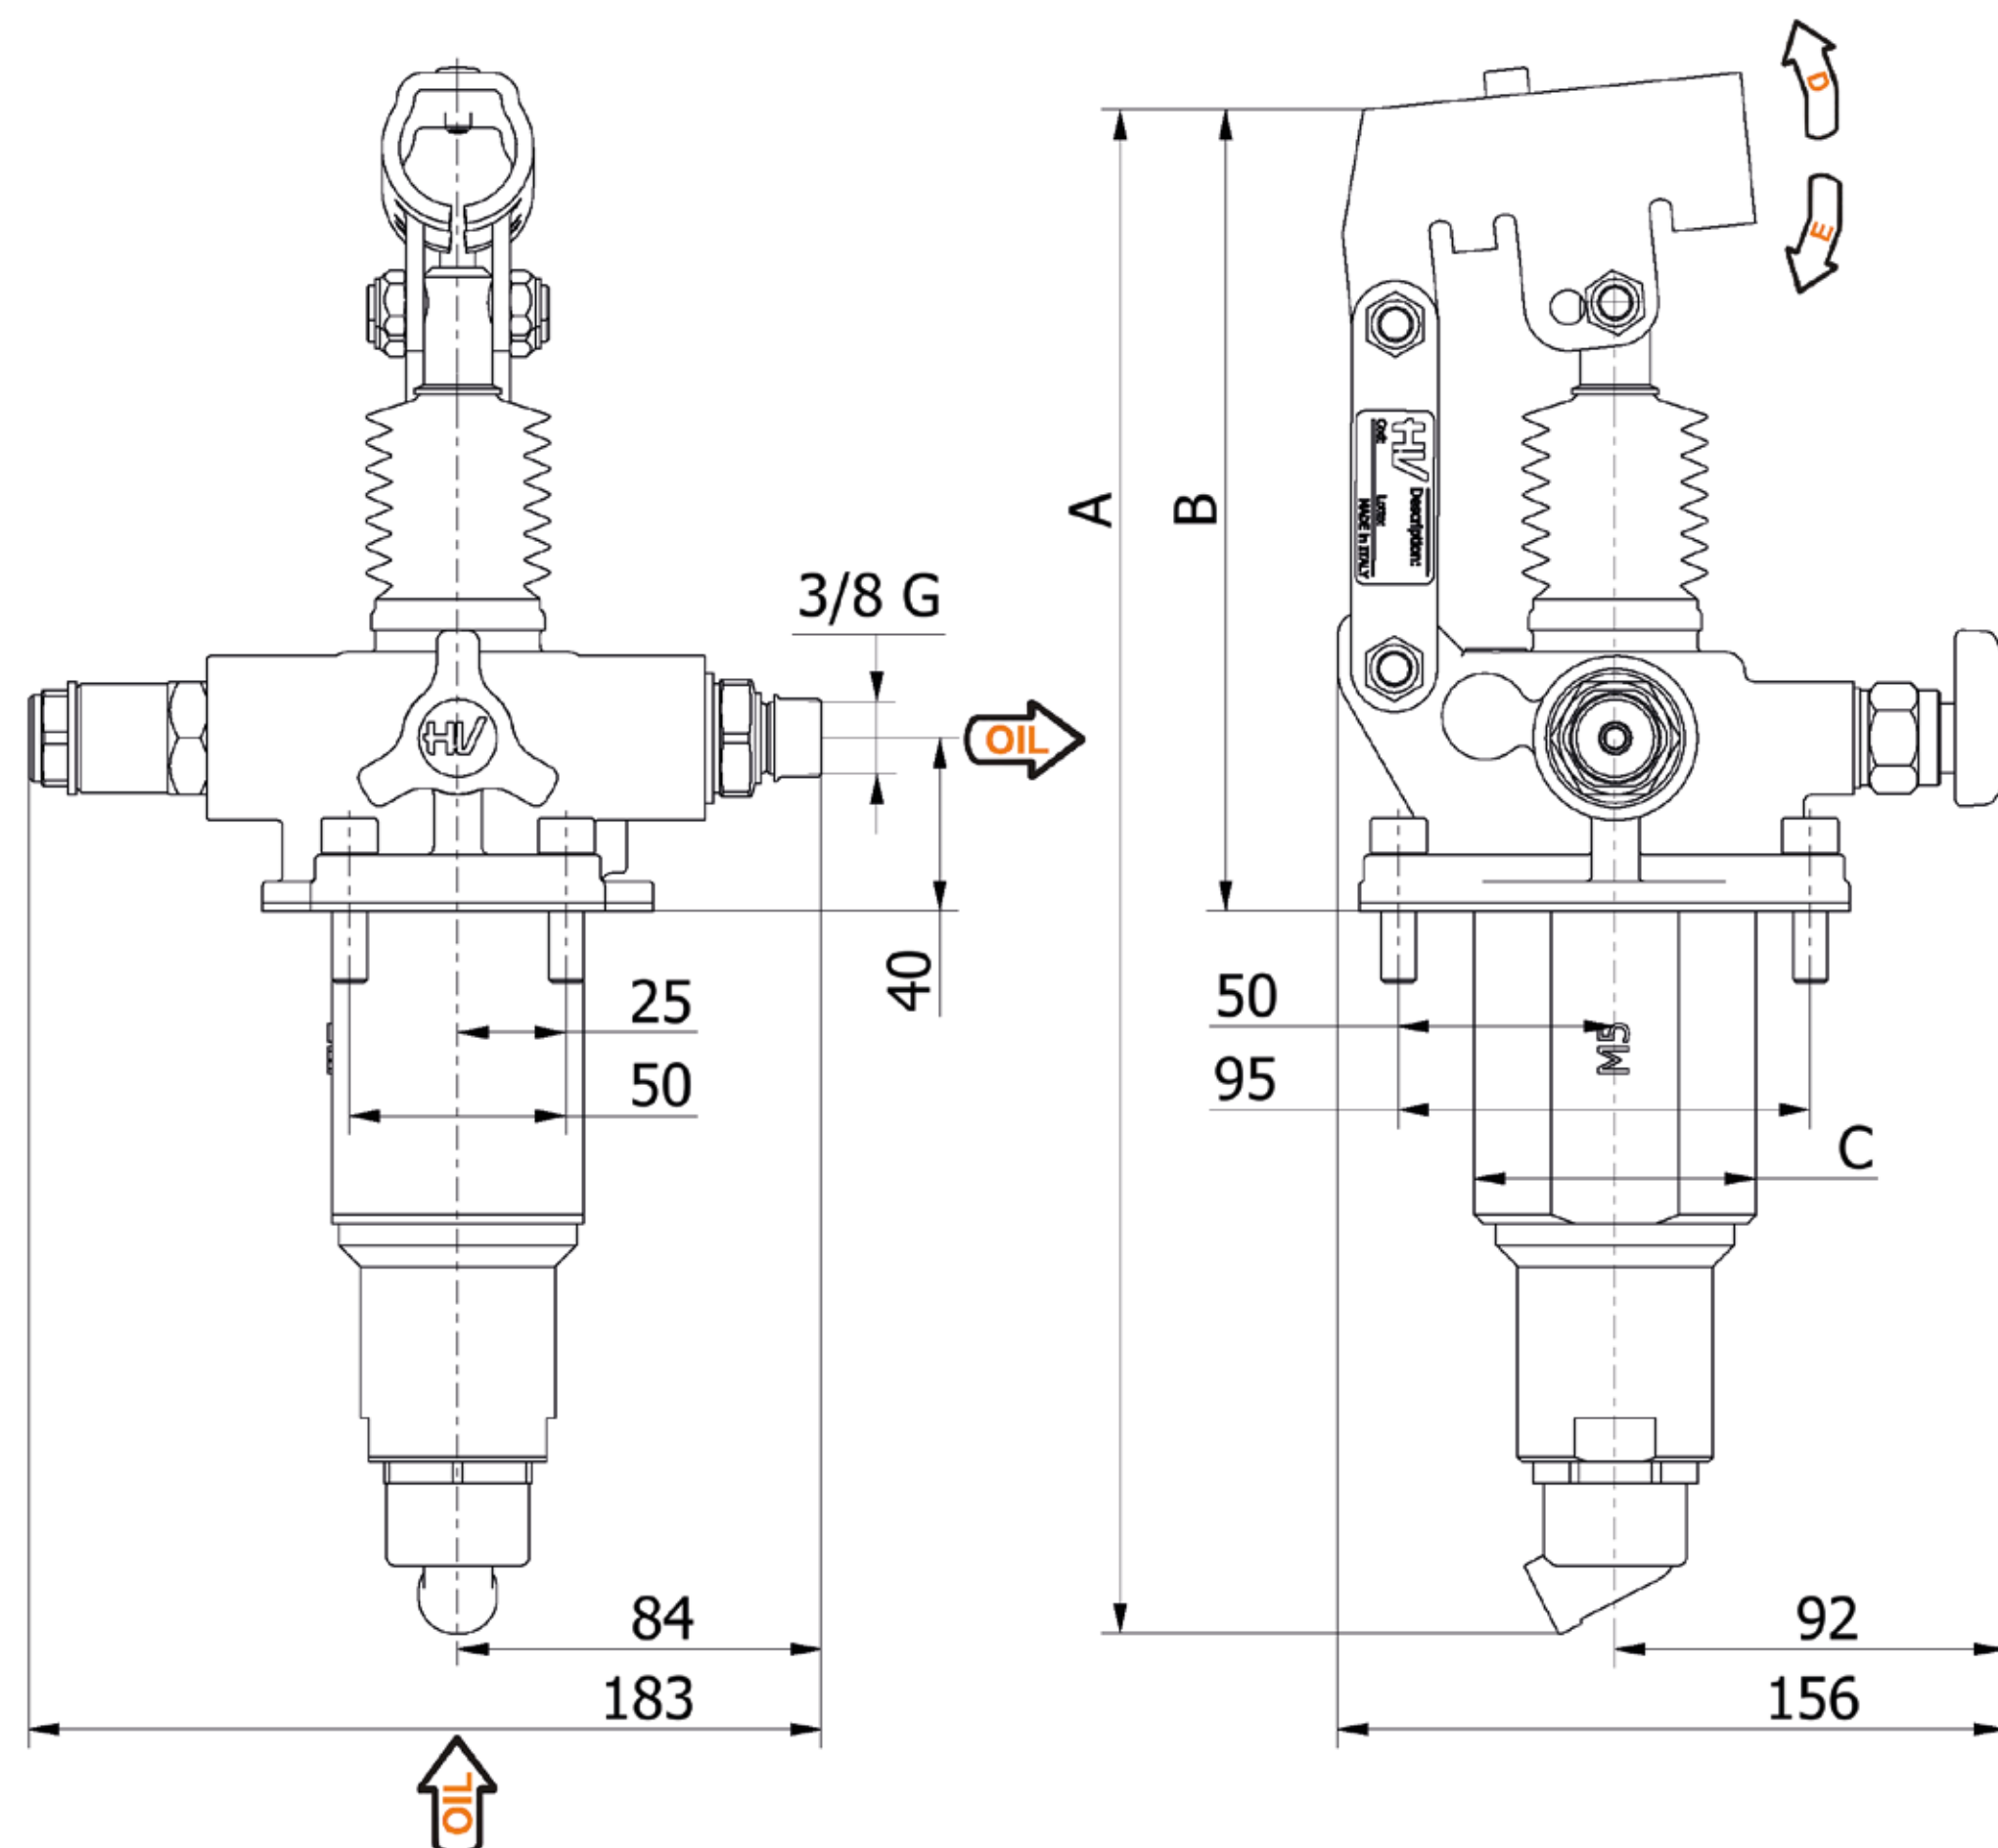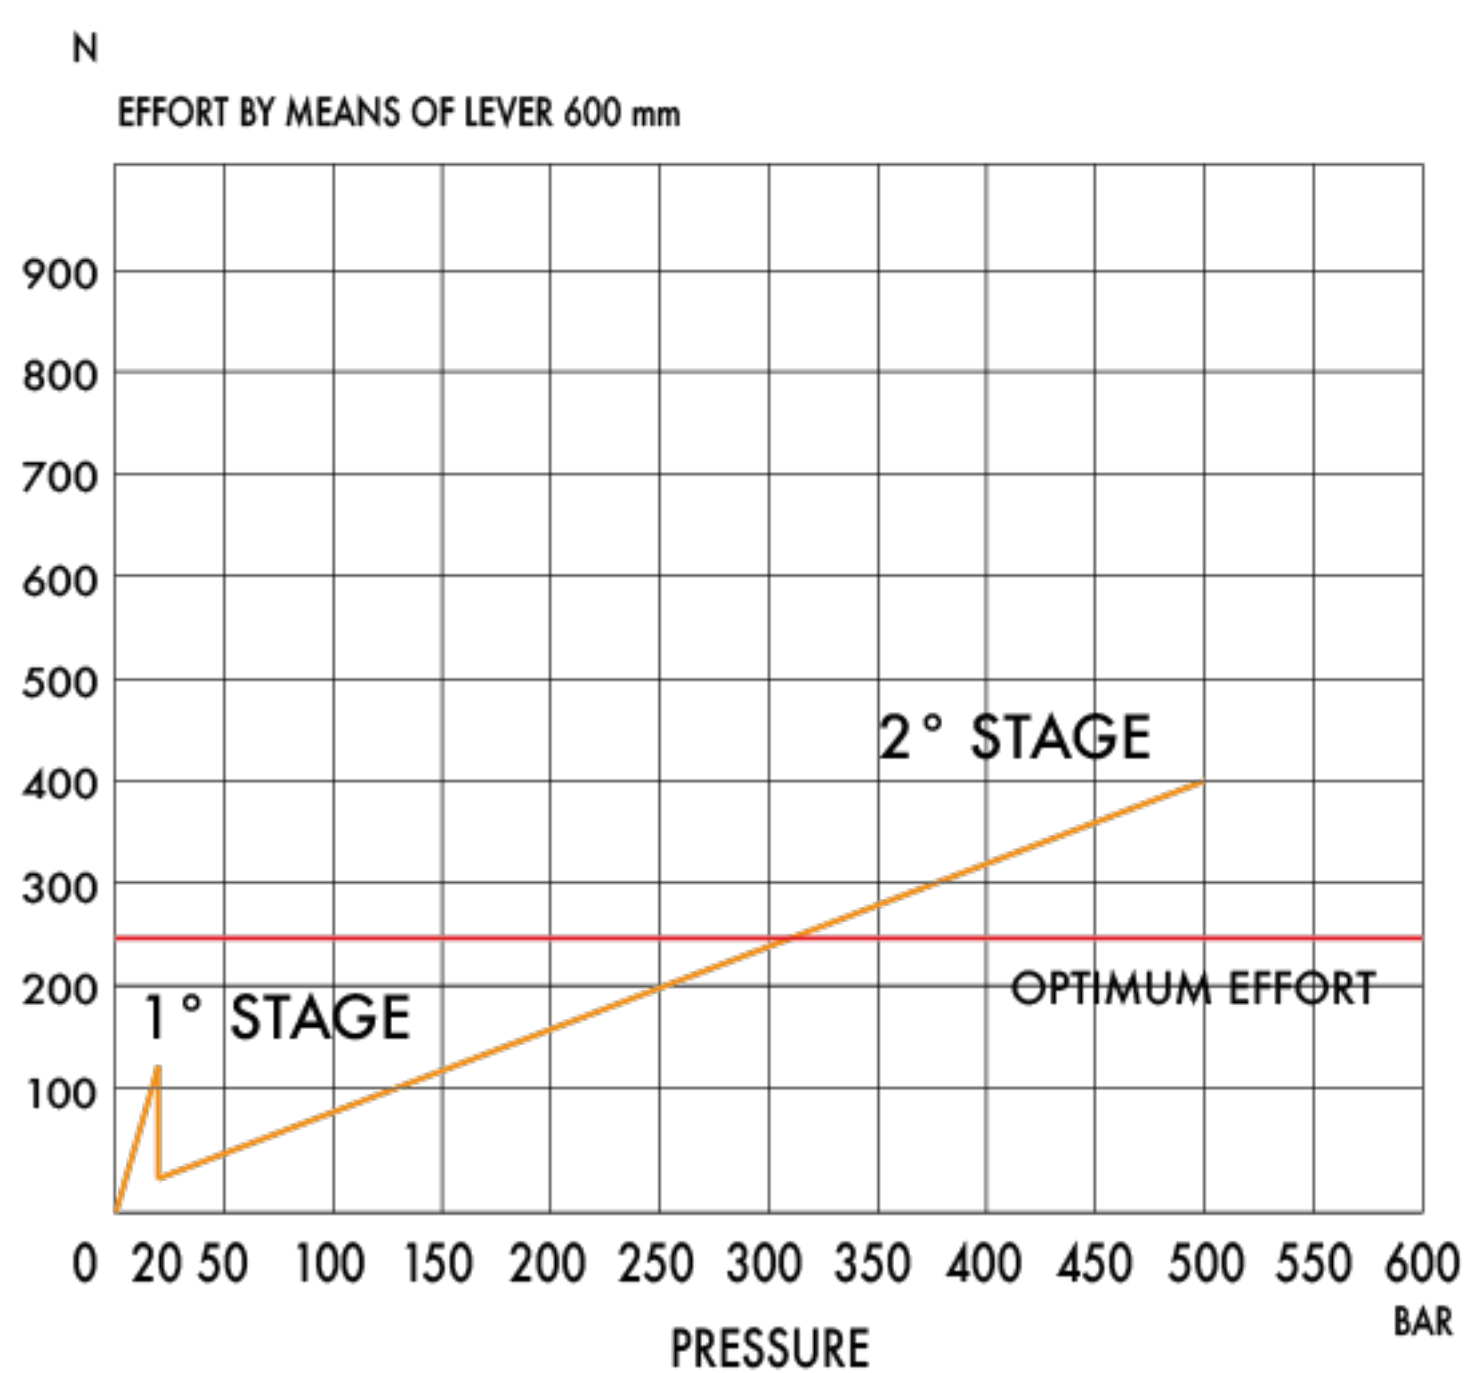[illegible]

Hand pumps

PM2V 5-80 a-byB-s

Tech sheet



DETAILS

- with release hand knob
- with automatic control for the 1st speed
- with pressure relief valve
- two speed hand pump for a single acting cylinder
- for fixing to tank



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included
Pressure relief valve standard
setting: 400 bar

HYDRAULIC DIAGRAM

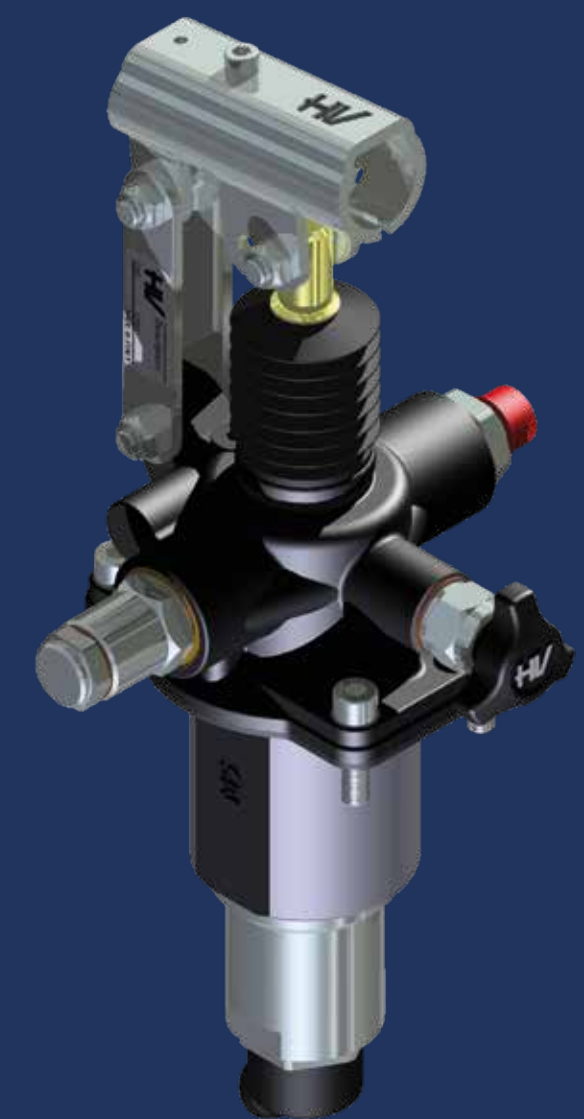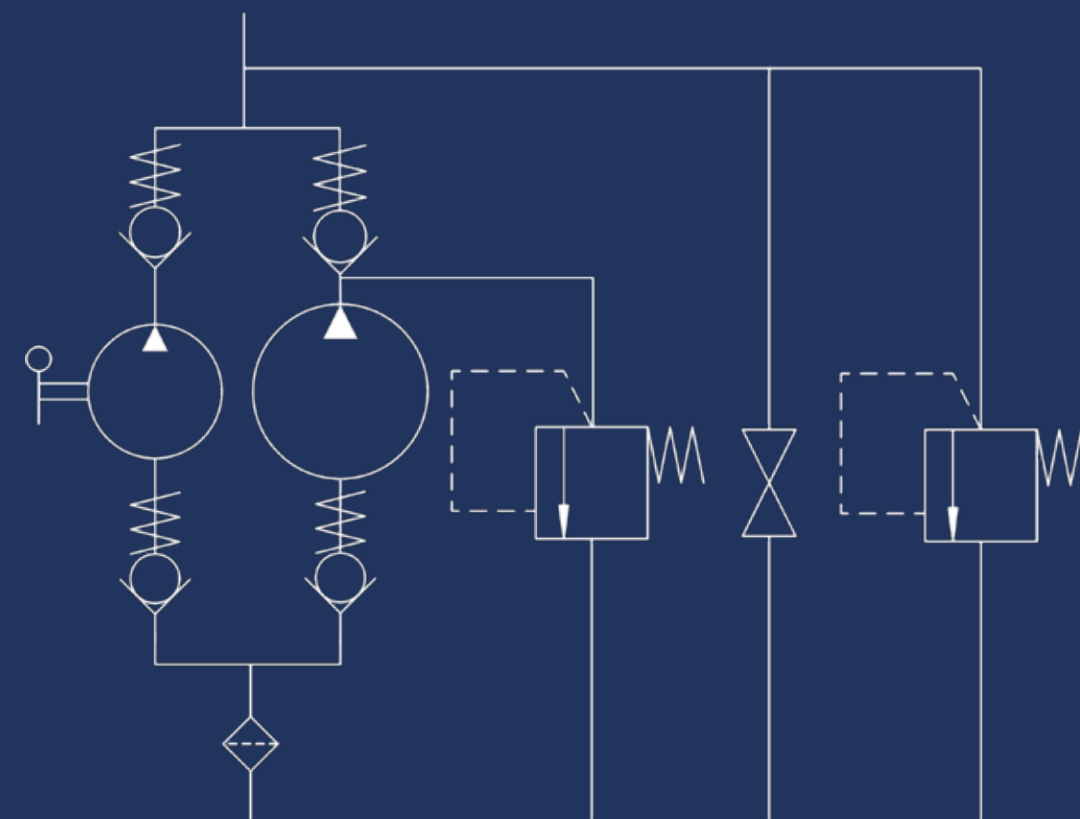

EFFORT DIAGRAM

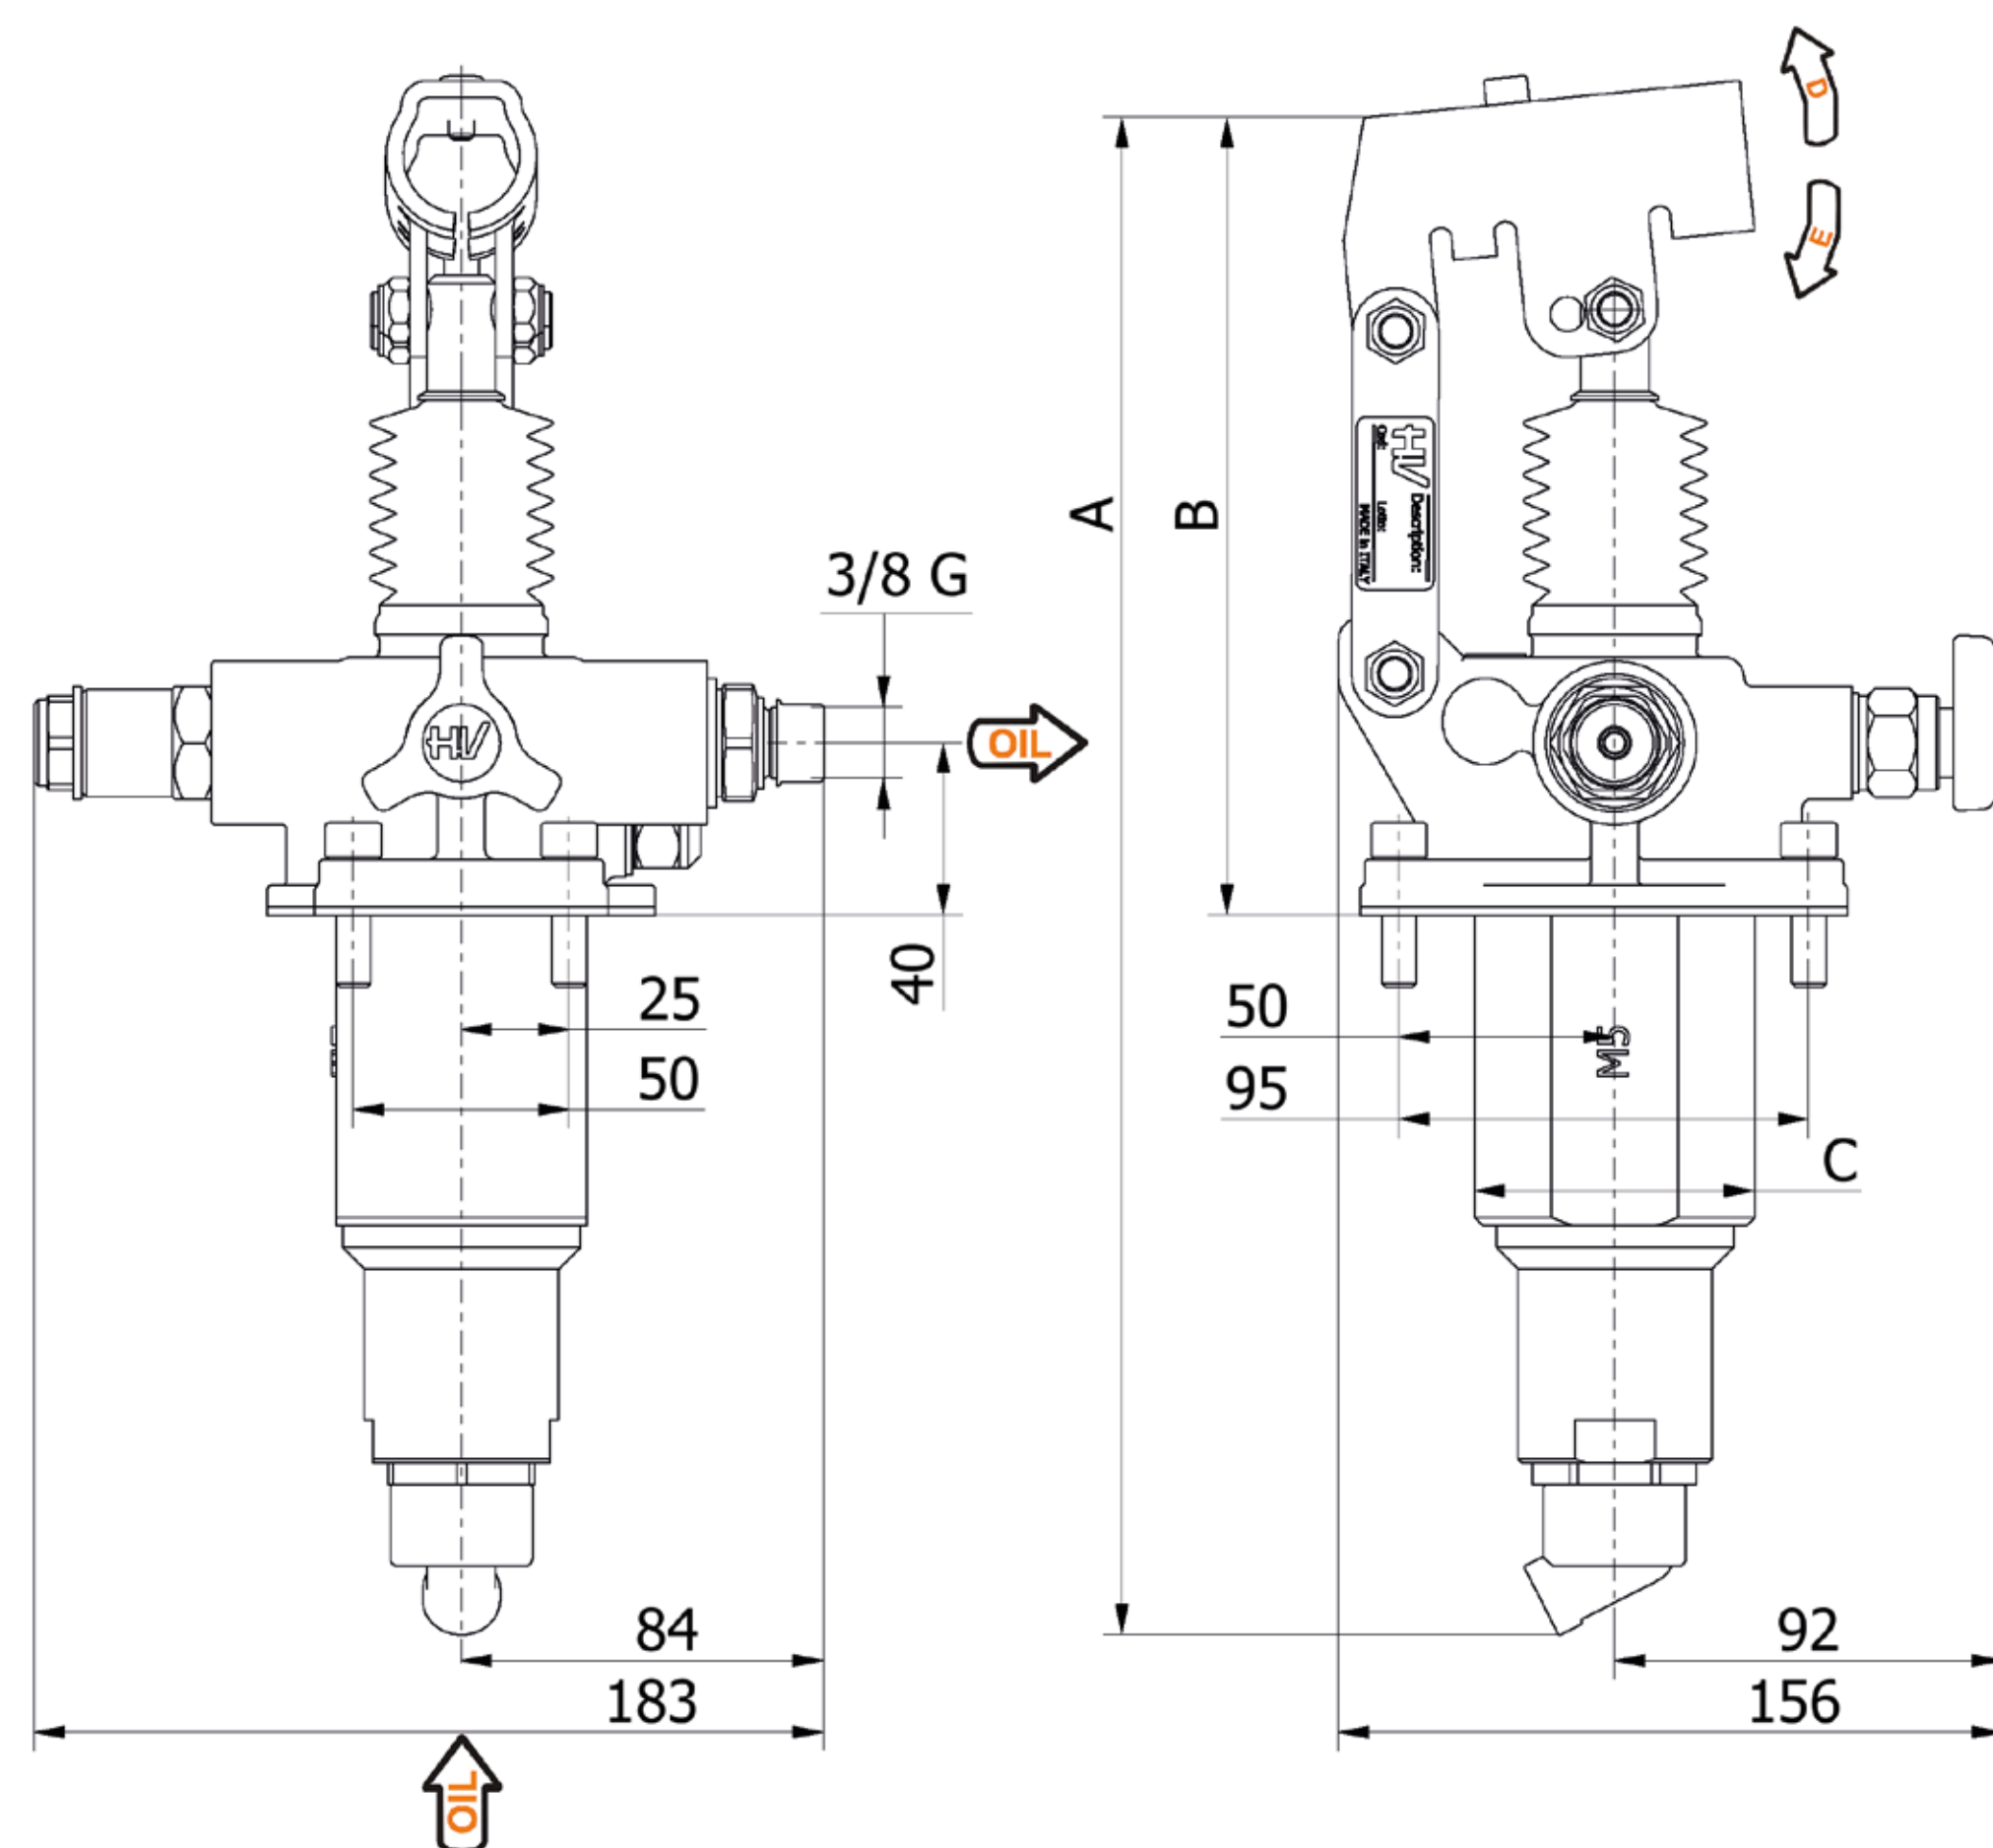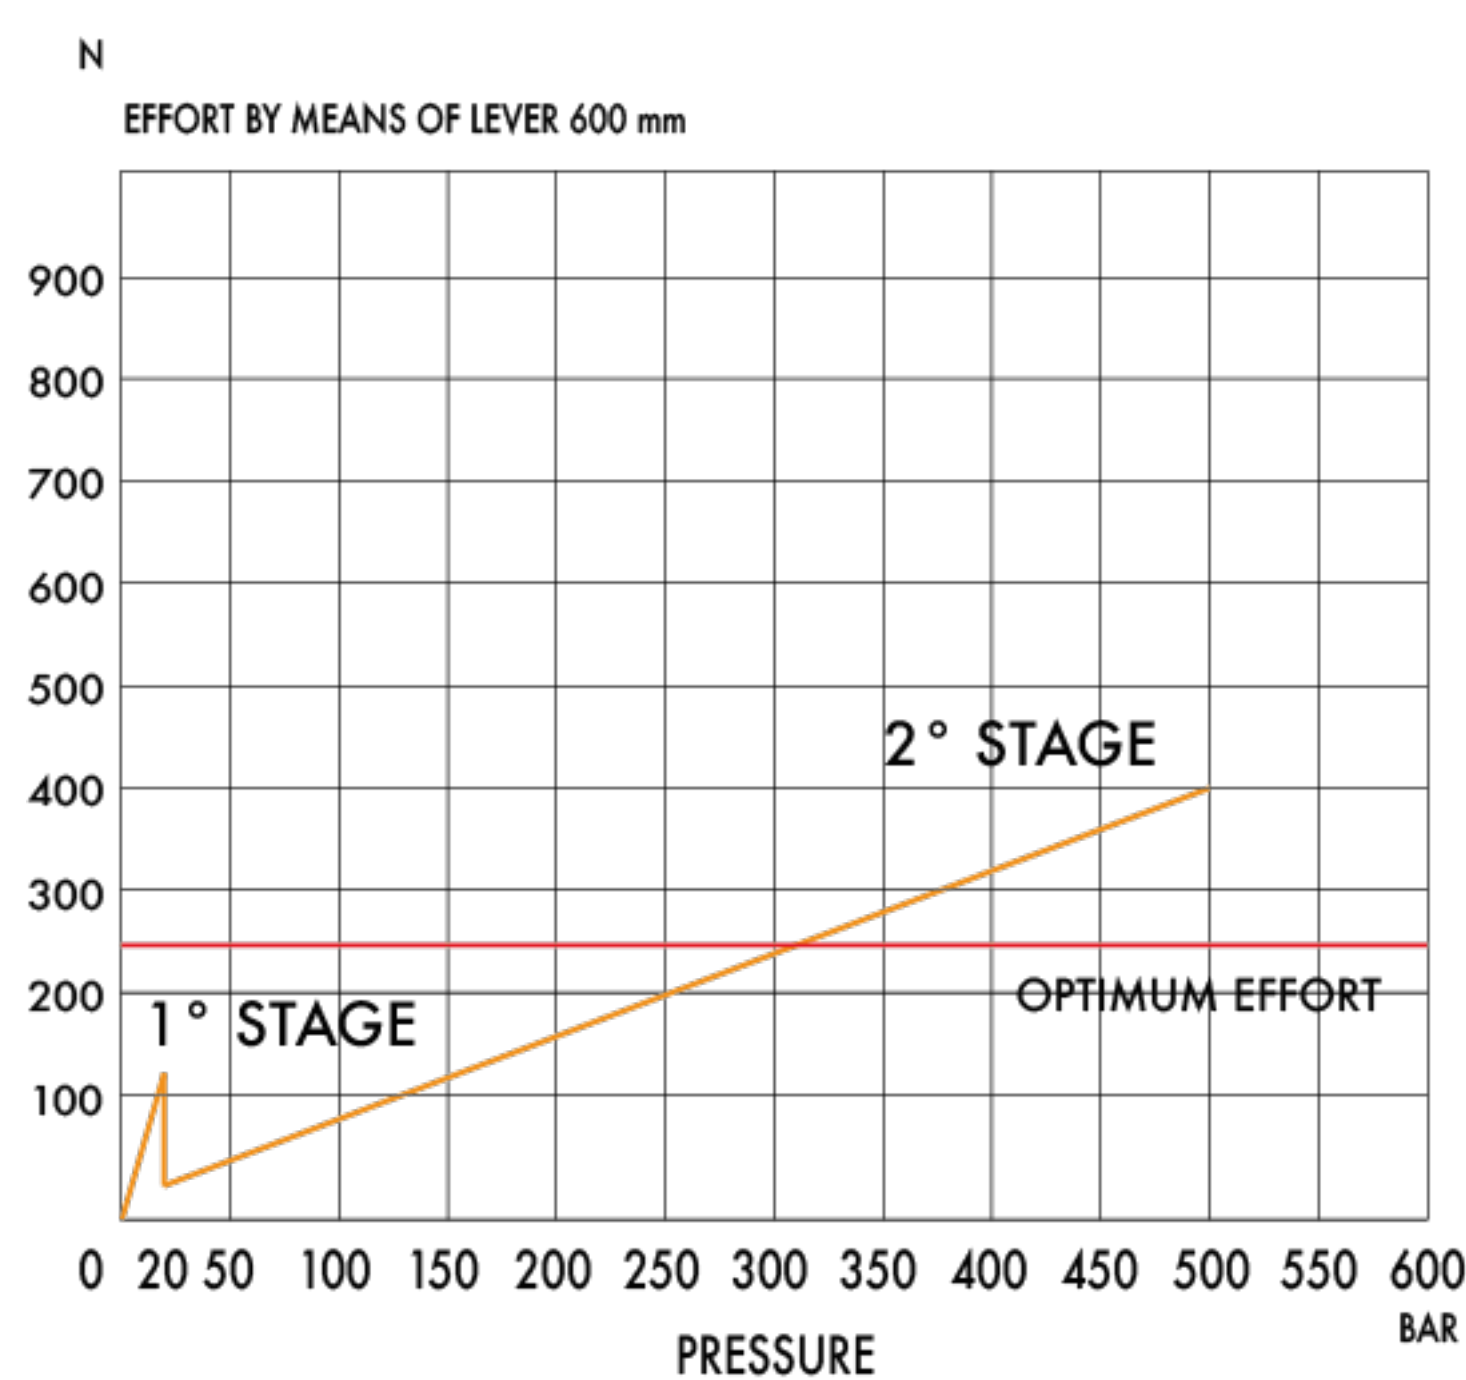[illegible]

Hand pumps

PM2V 5-80 a-pm-s

Tech sheet



DETAILS

- with release hand knob
- with automatic control for the 1st speed
- with pressure-gauge prearrangement
- two speed hand pump for a single acting cylinder
- for fixing to tank



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included
With pressure-gauge
prearrangement, connection: 1/4 G

HYDRAULIC DIAGRAM

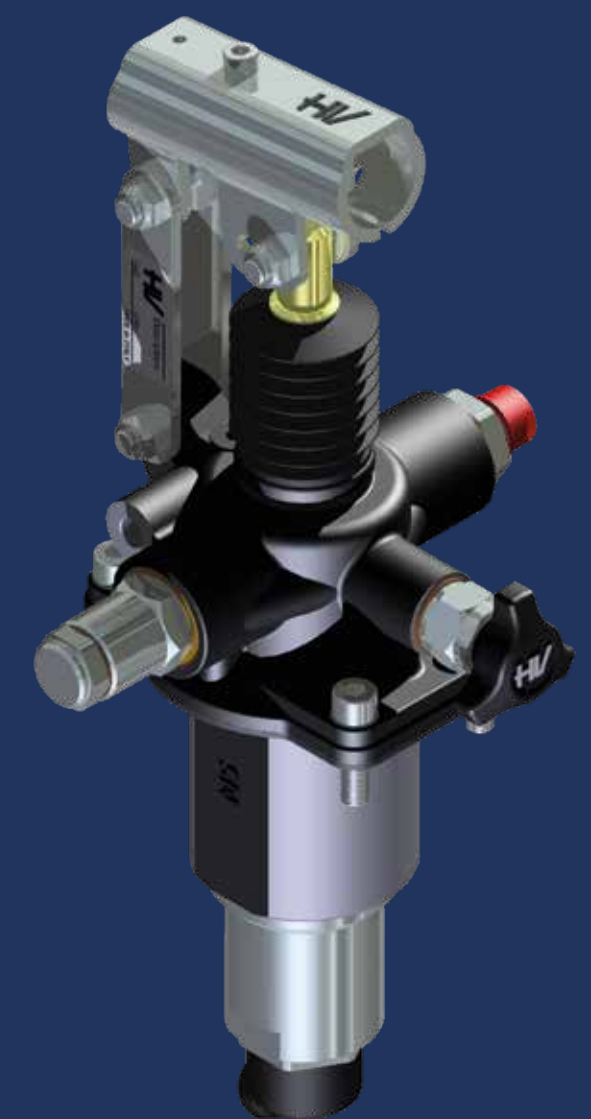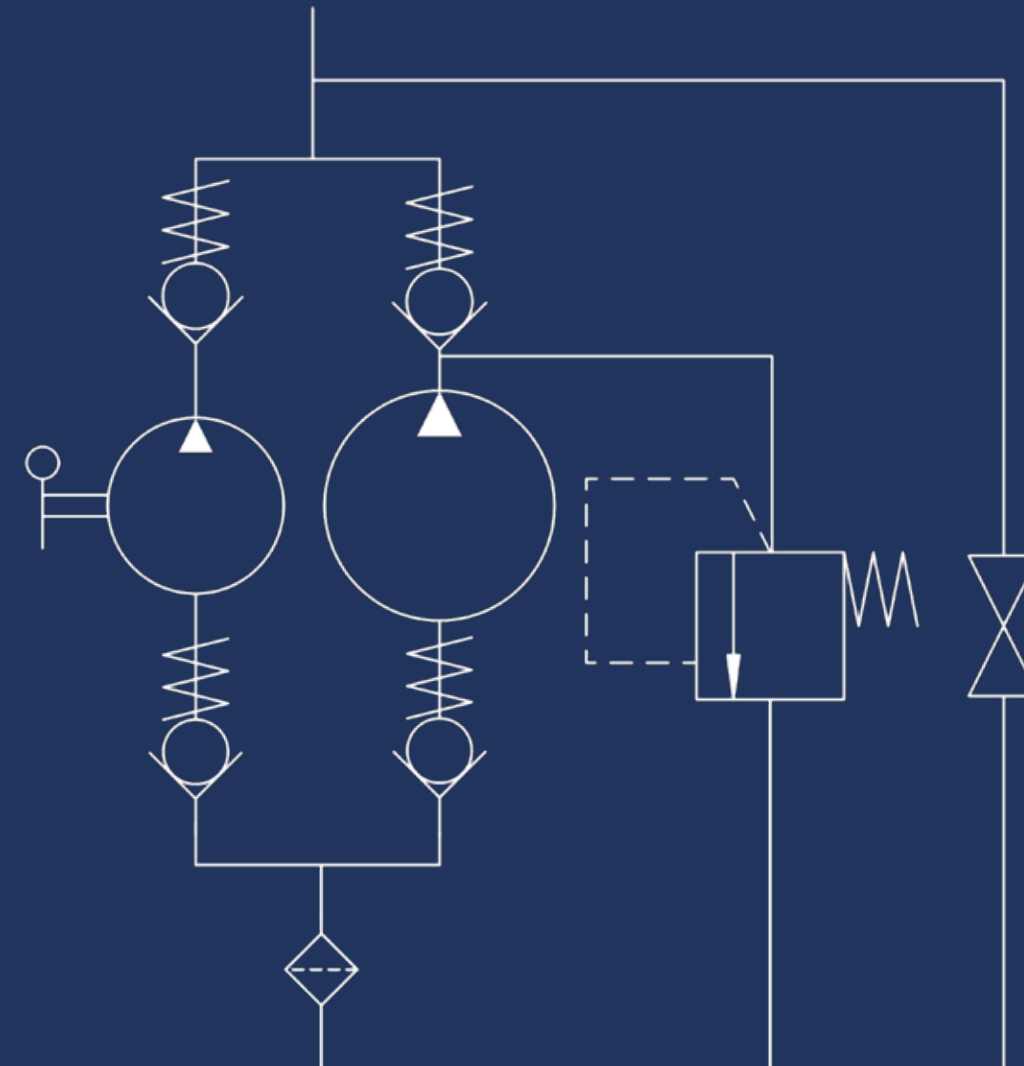

EFFORT DIAGRAM

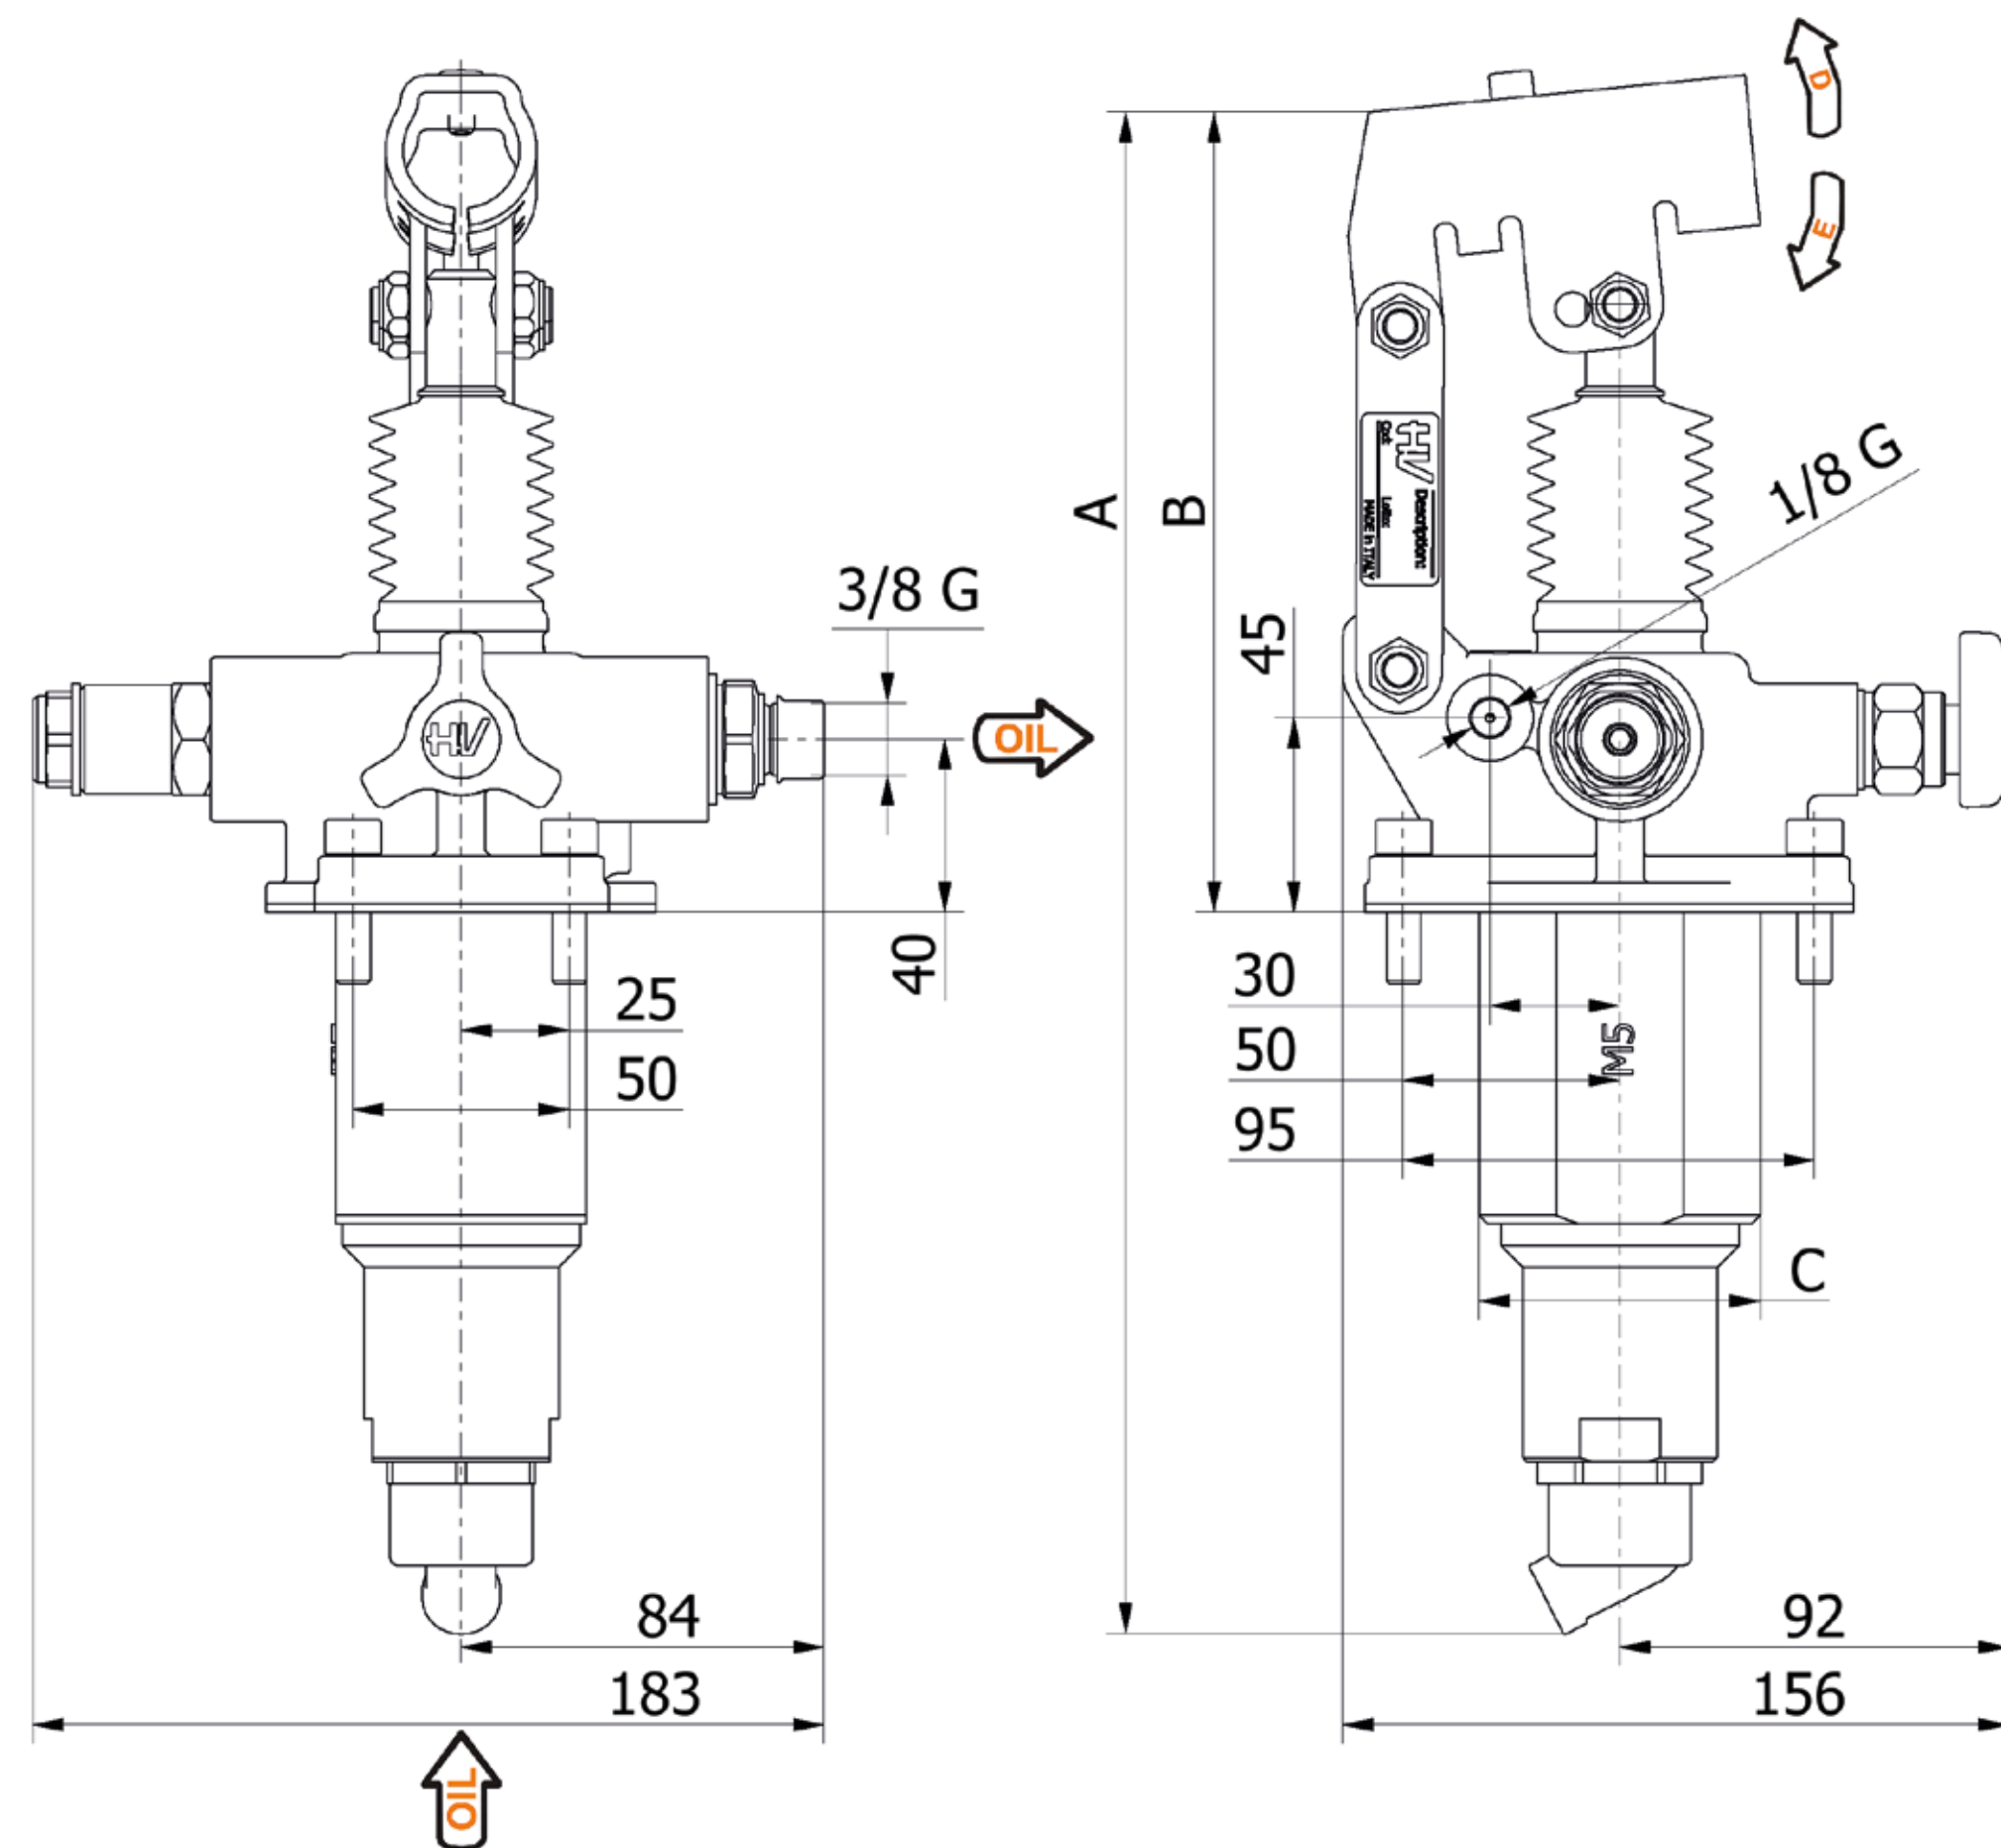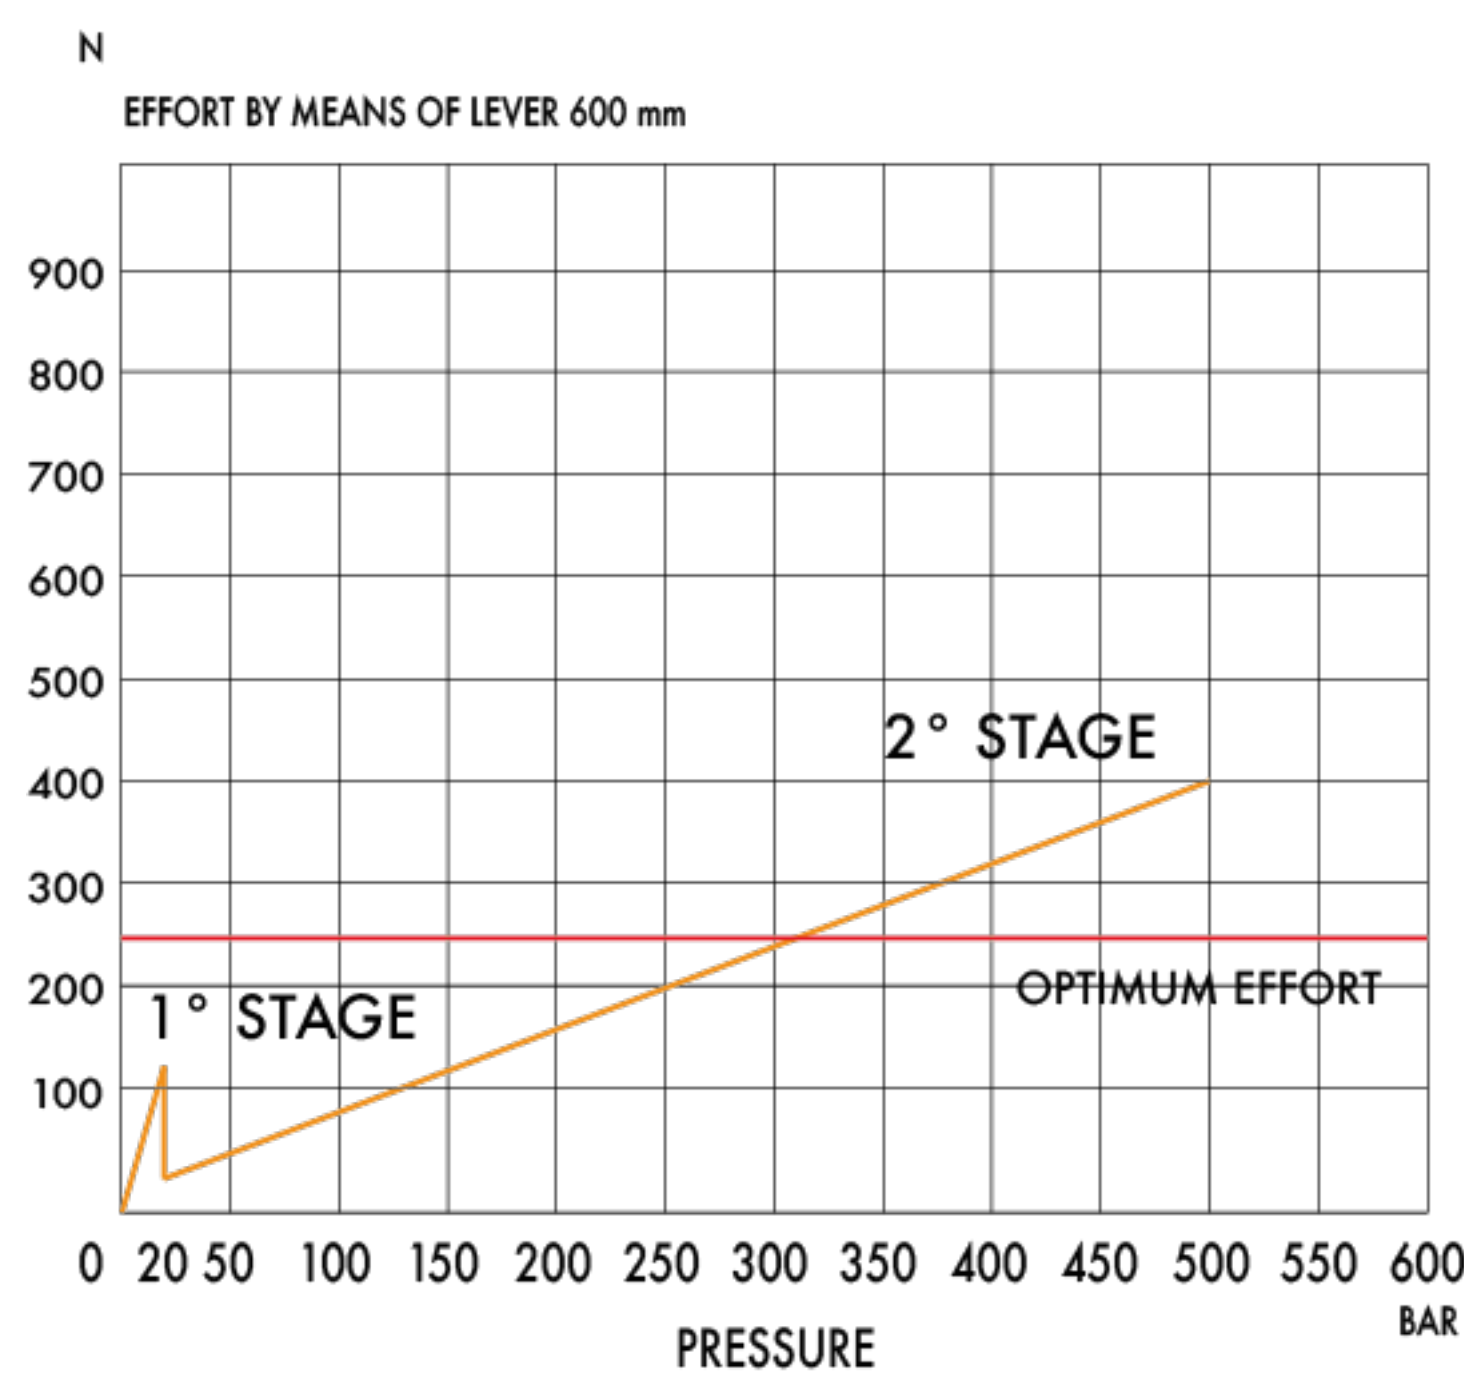[illegible]

Hand pumps

PM2V 5-80 α-M-s

Tech sheet


DETAILS

with release hand knob
 with automatic control for the 1st speed
 with pressure-gauge
 two speed hand pump for a single acting cylinder
 for fixing to tank



SPECIFICATIONS

Cast iron body
 Piston treated with Niploy
 White zinc plated support lever
 Lever connection Ø 27
 White zinc plated external parts
 Standard colour black
 Oil tank mounting kit included

HYDRAULIC DIAGRAM

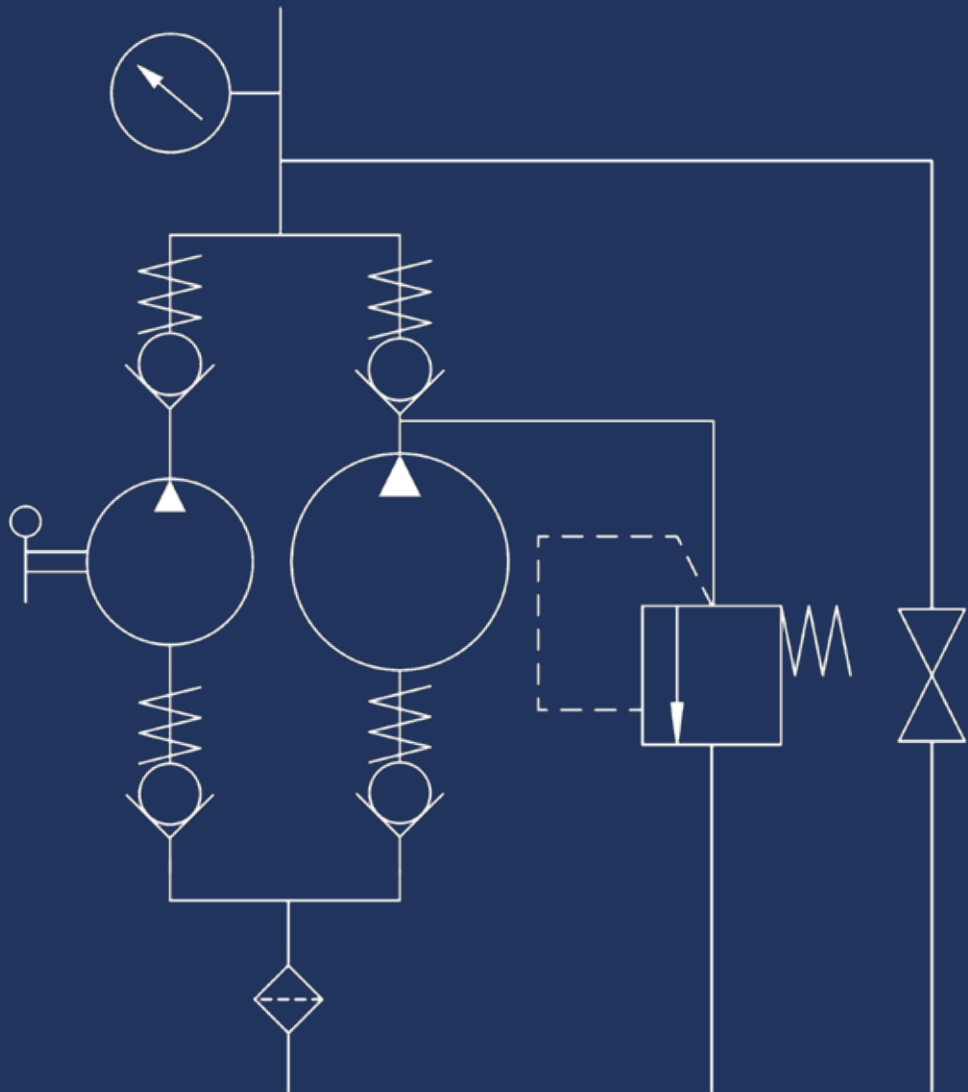

EFFORT DIAGRAM

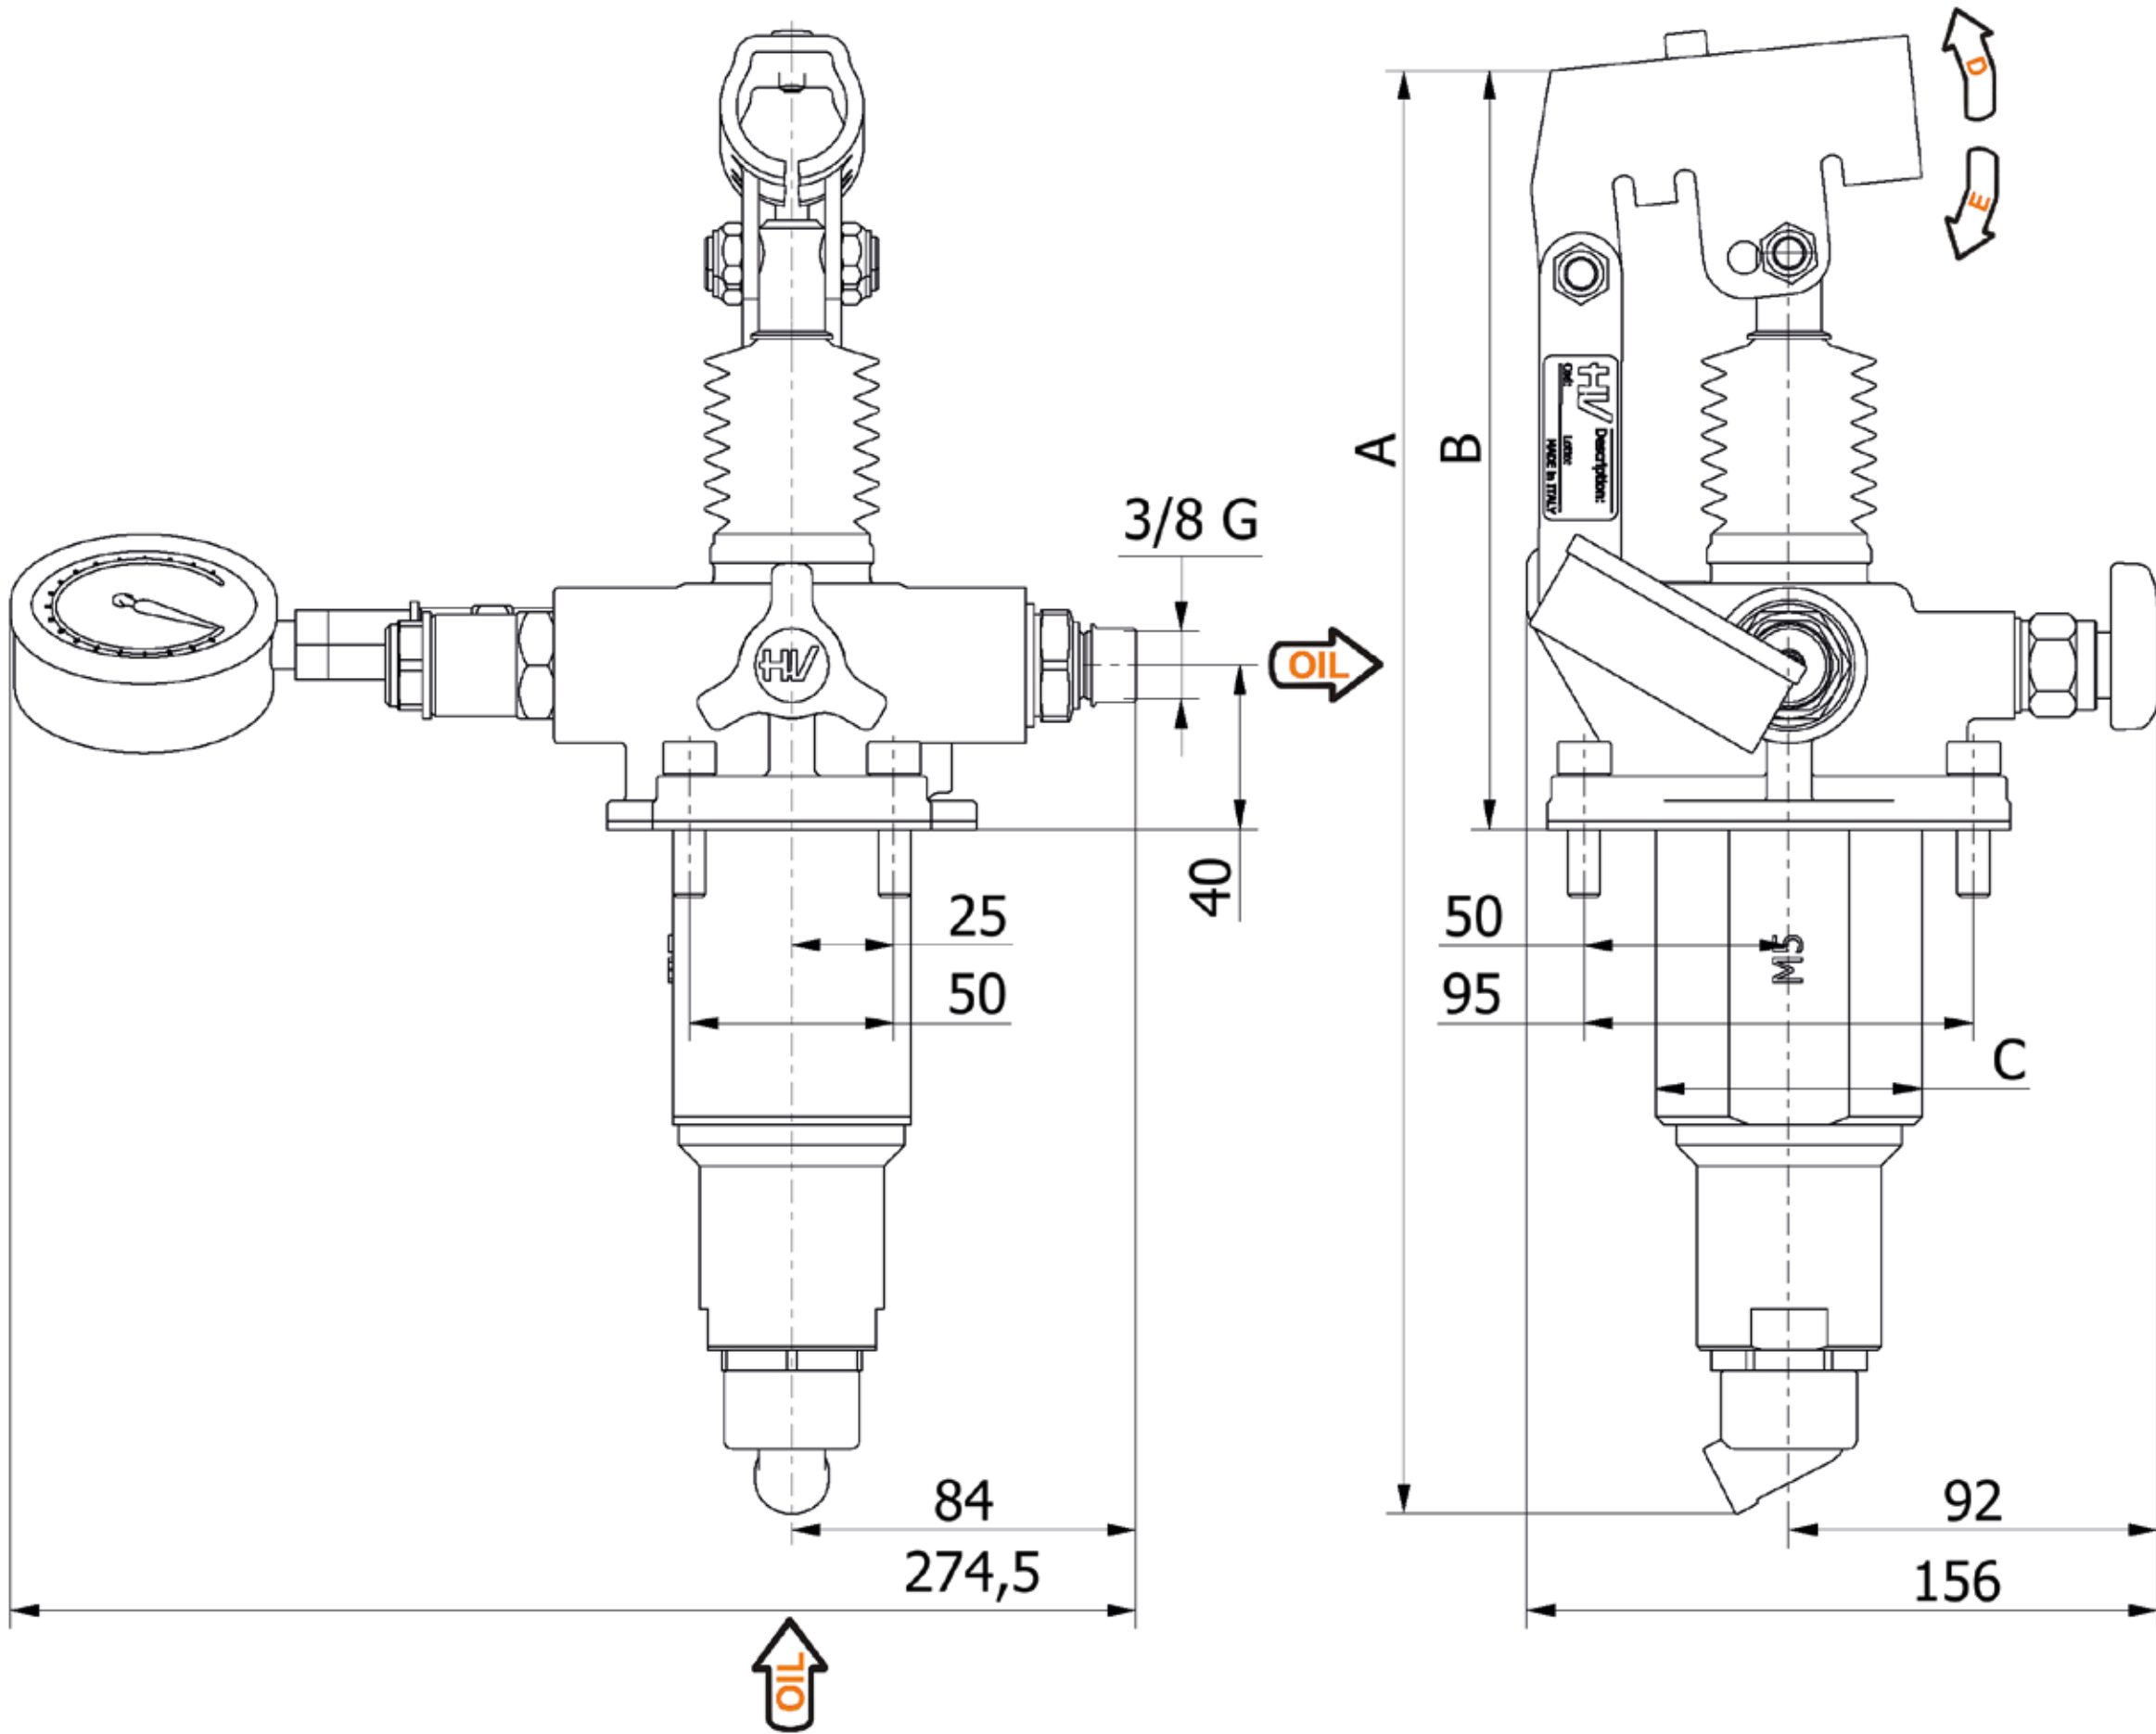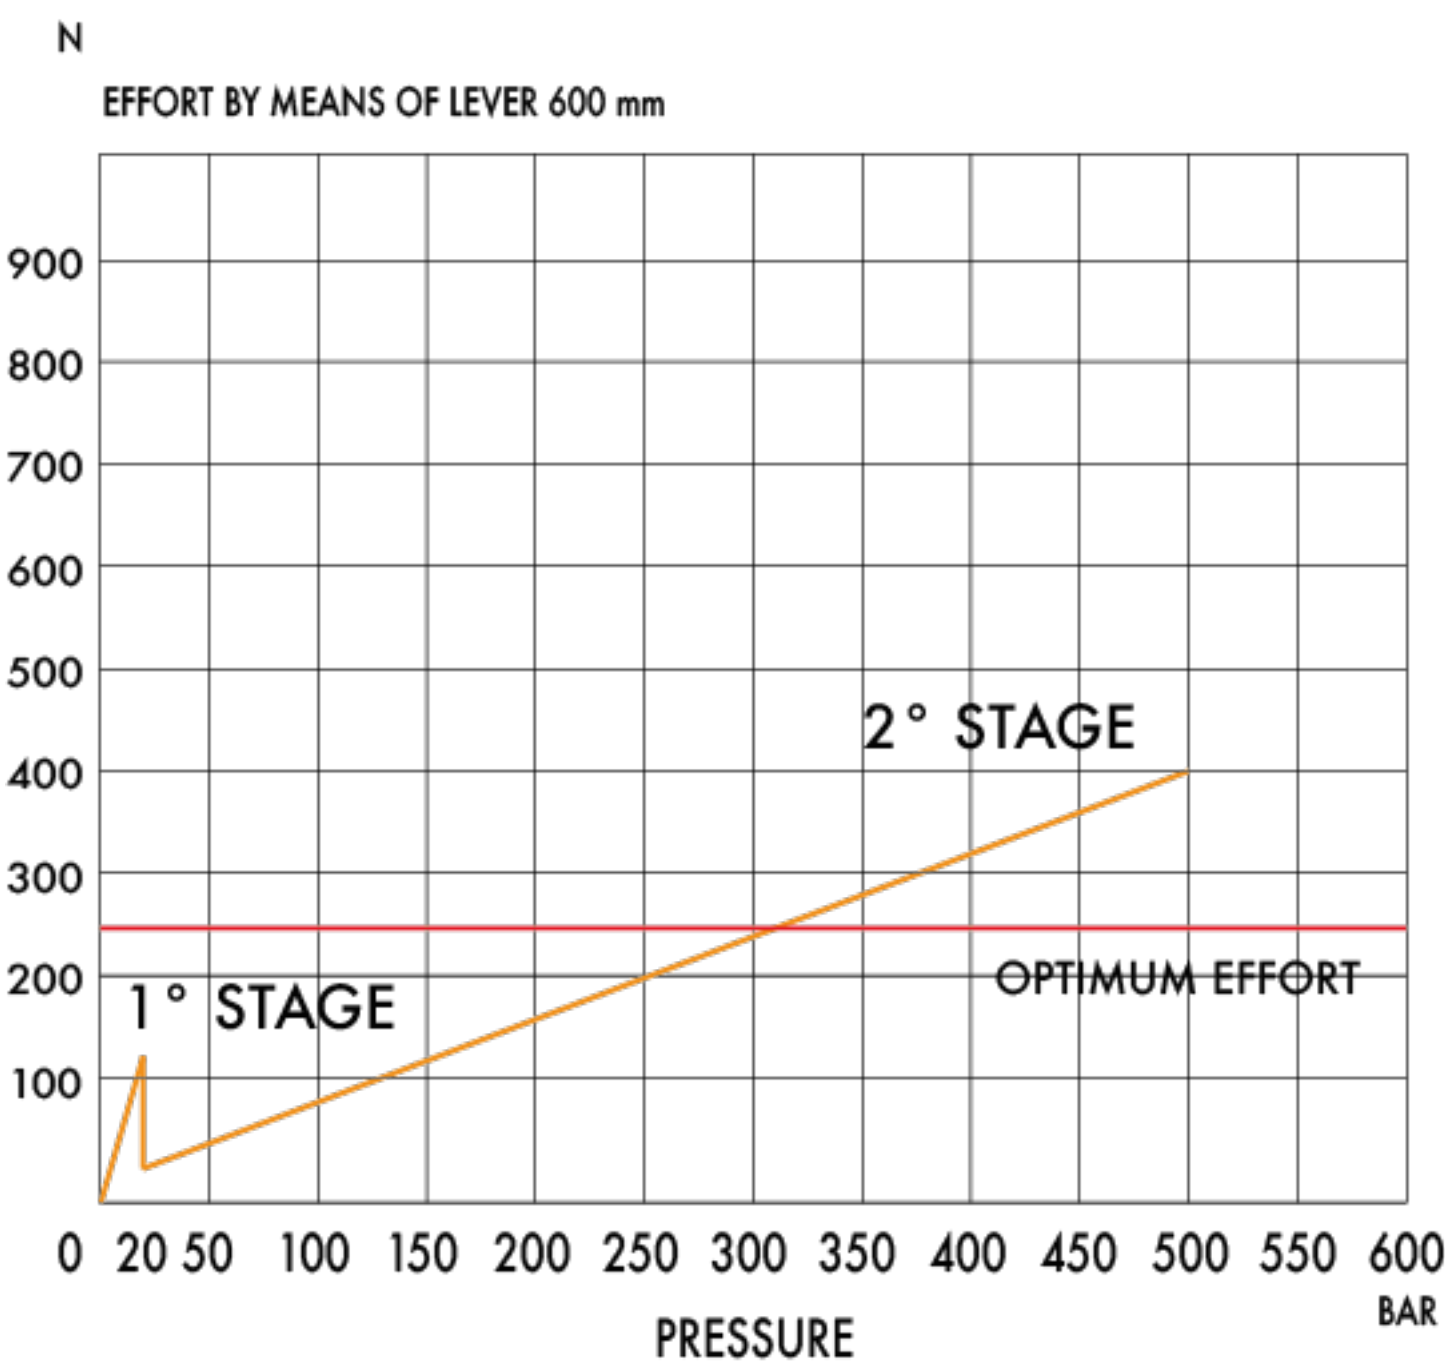

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	DISPLACEMENT cm ³		PRESSURE BAR		MASS KG	CODE
						STAGE 1	STAGE 2	STAGE 1	STAGE 2		
5-80	354	165	65	30	32	80,588	5,036	20	500	6,200	6071.0136

Hand pumps

PM2V 5-80 a-byB-pm-s

Tech sheet



DETAILS

- with release hand knob
- with automatic control for the 1st speed
- with pressure relief valve and pressure-gauge prearrangement
- two speed hand pump for a single acting cylinder
- for fixing to tank



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included
Pressure relief valve standard
setting: 400 bar
With pressure-gauge
prearrangement, connection: 1/4 G

HYDRAULIC DIAGRAM

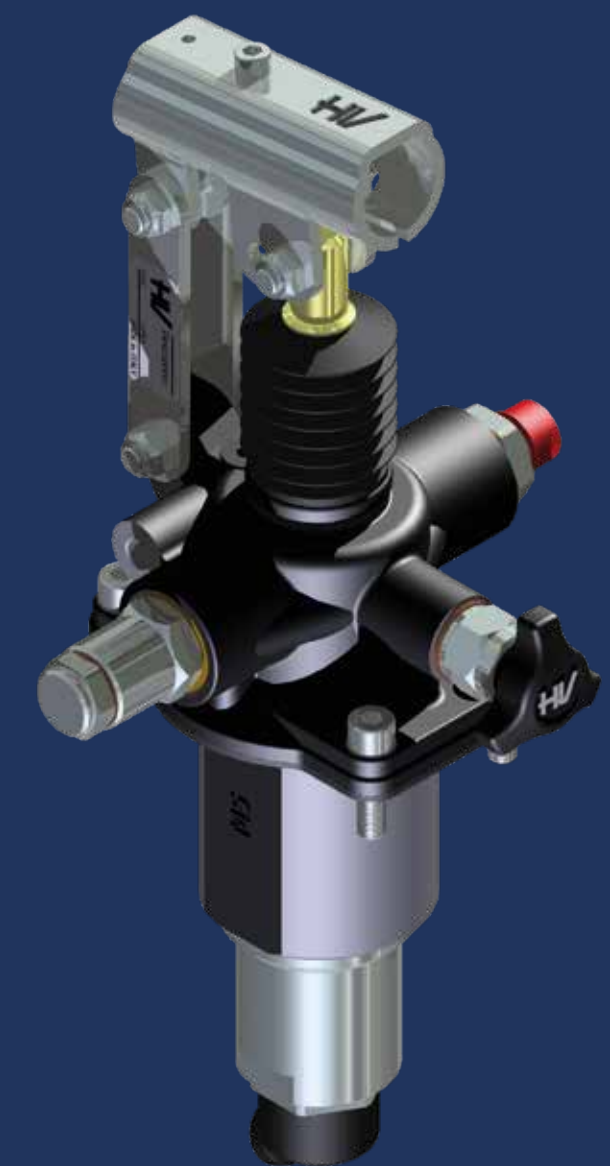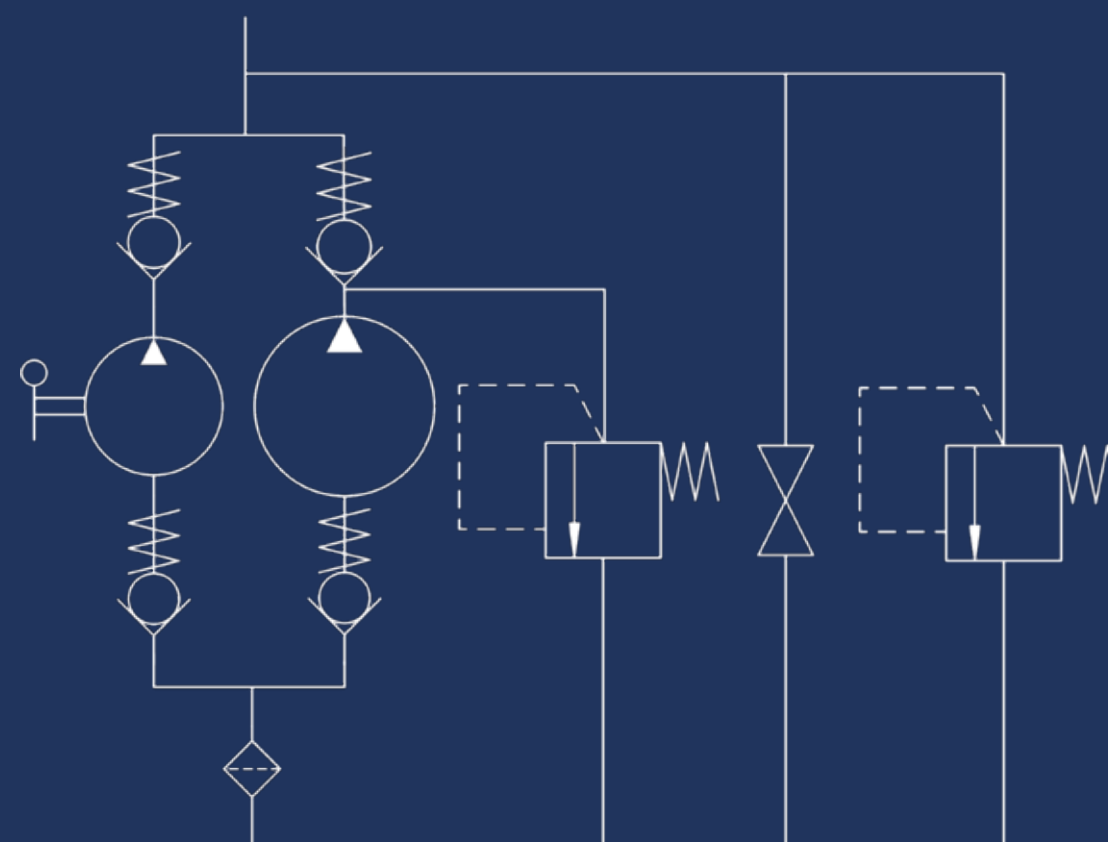

EFFORT DIAGRAM

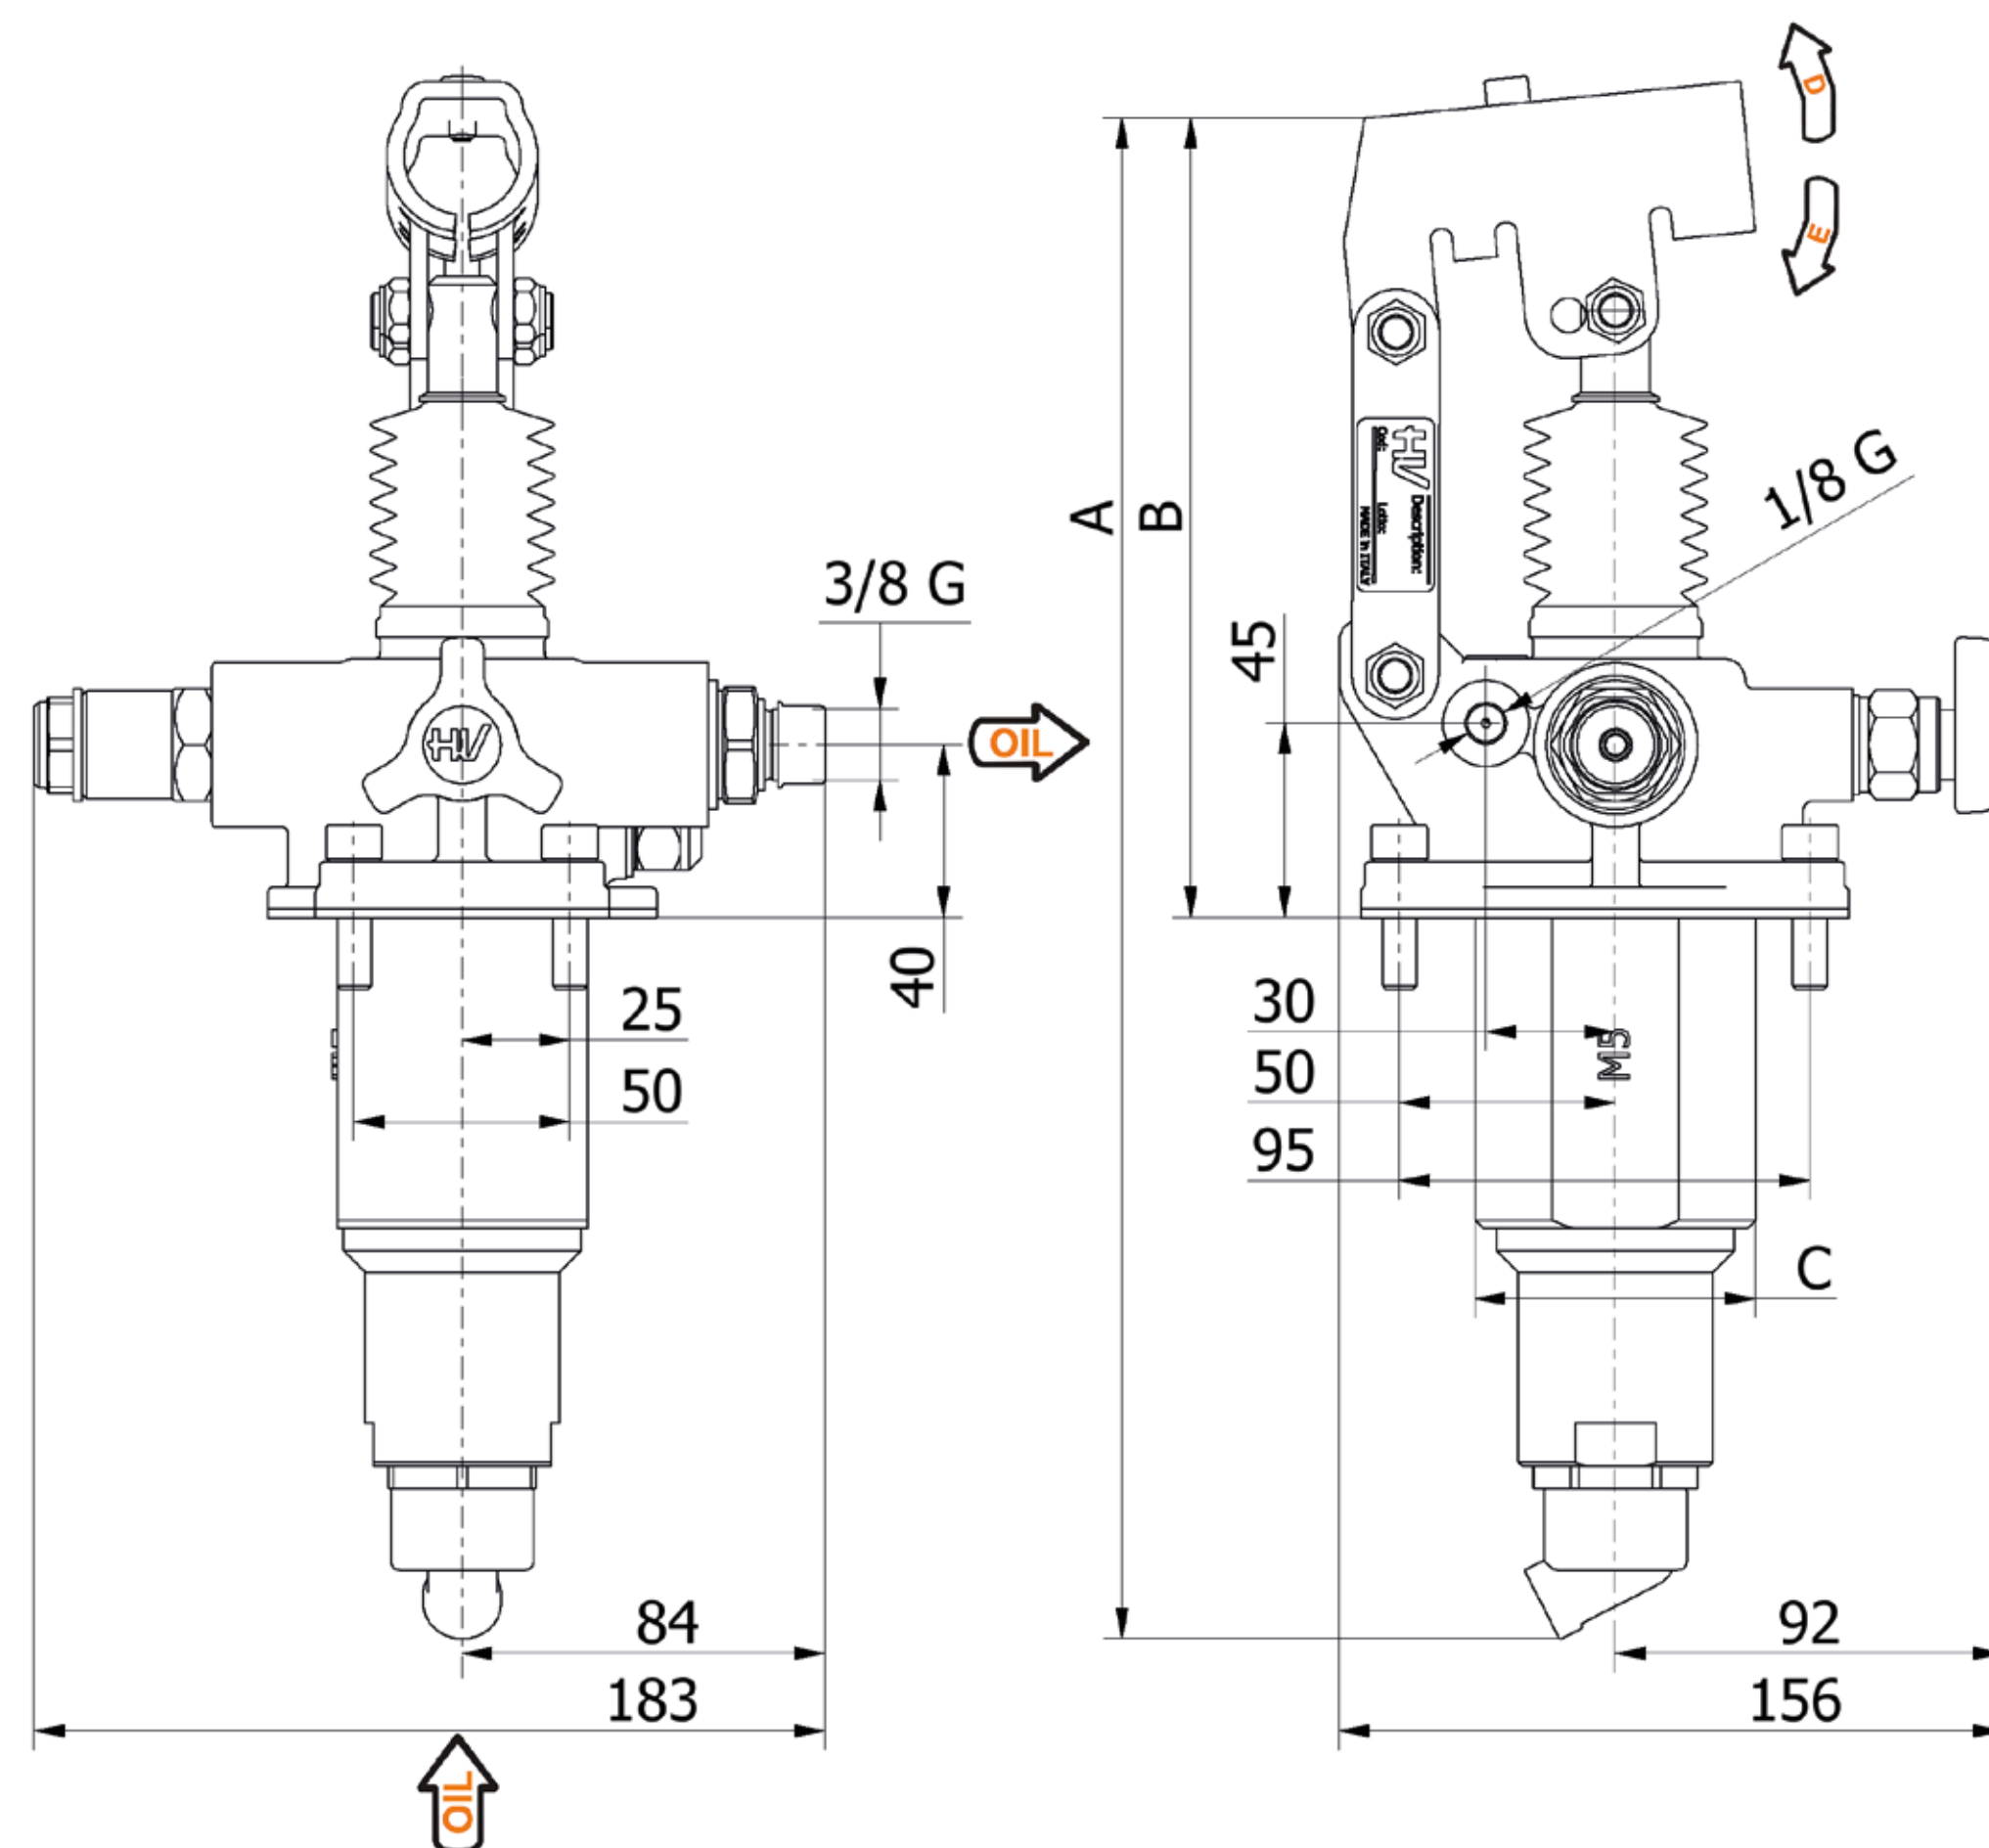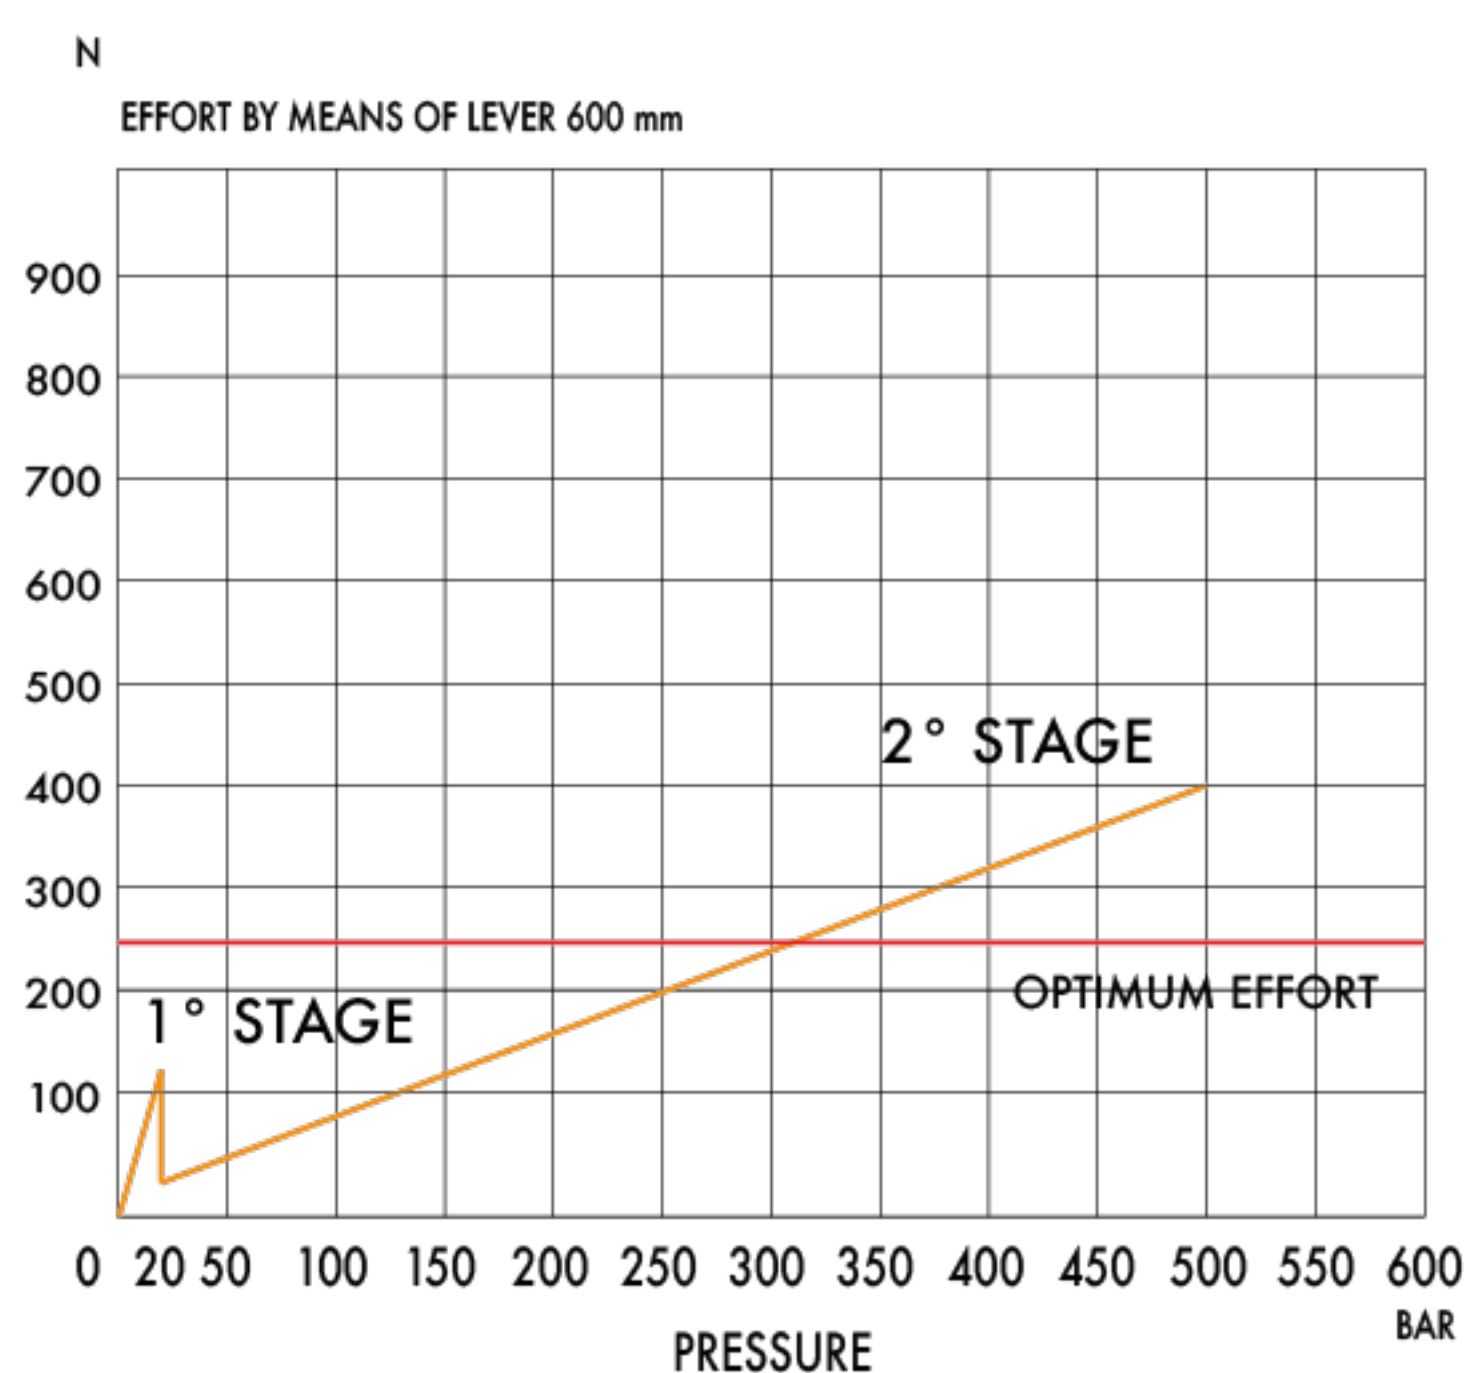[illegible]

Hand pumps

PM2V 5-80 a-byB-M-s

Tech sheet


DETAILS

- with release hand knob
- with automatic control for the 1st speed
- with pressure relief valve and pressure-gauge two speed
- hand pump for a single acting cylinder for fixing to tank



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included
Pressure relief valve standard
setting: 400 bar

HYDRAULIC DIAGRAM

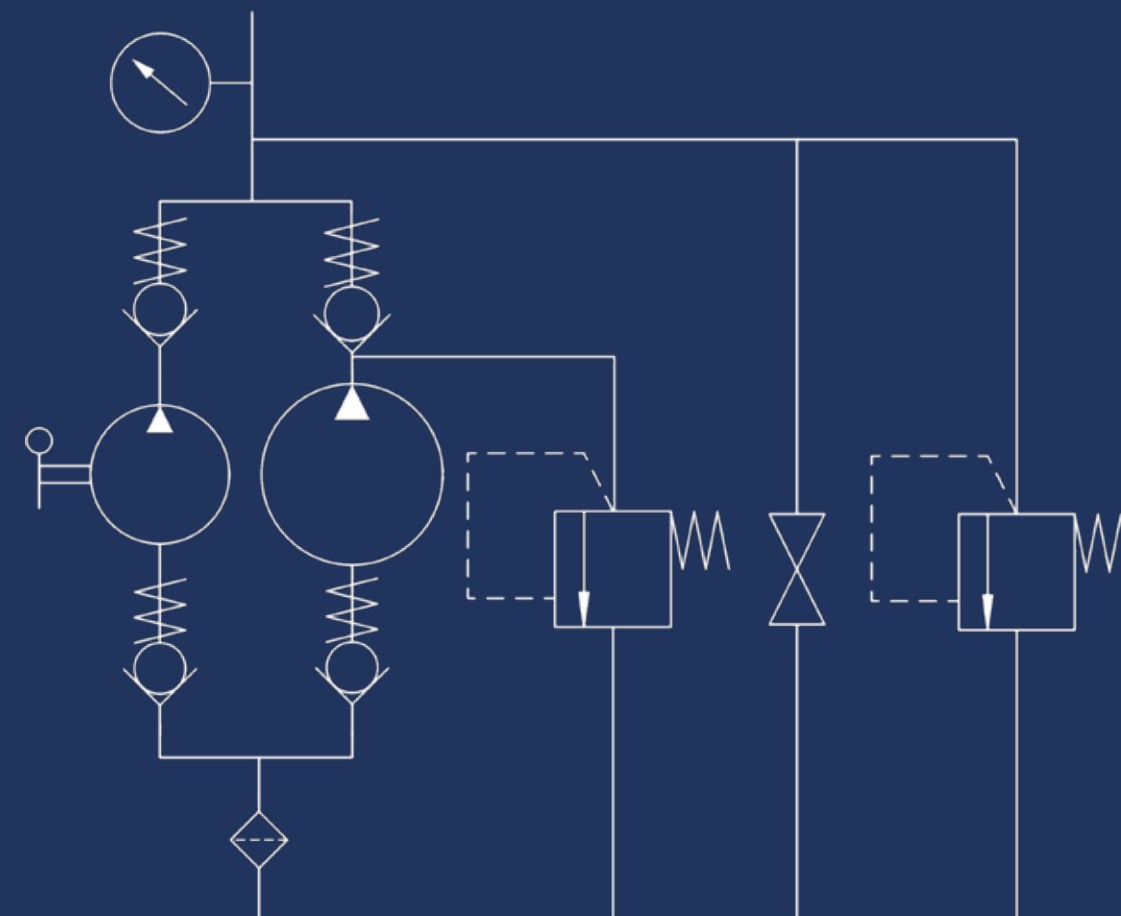

EFFORT DIAGRAM

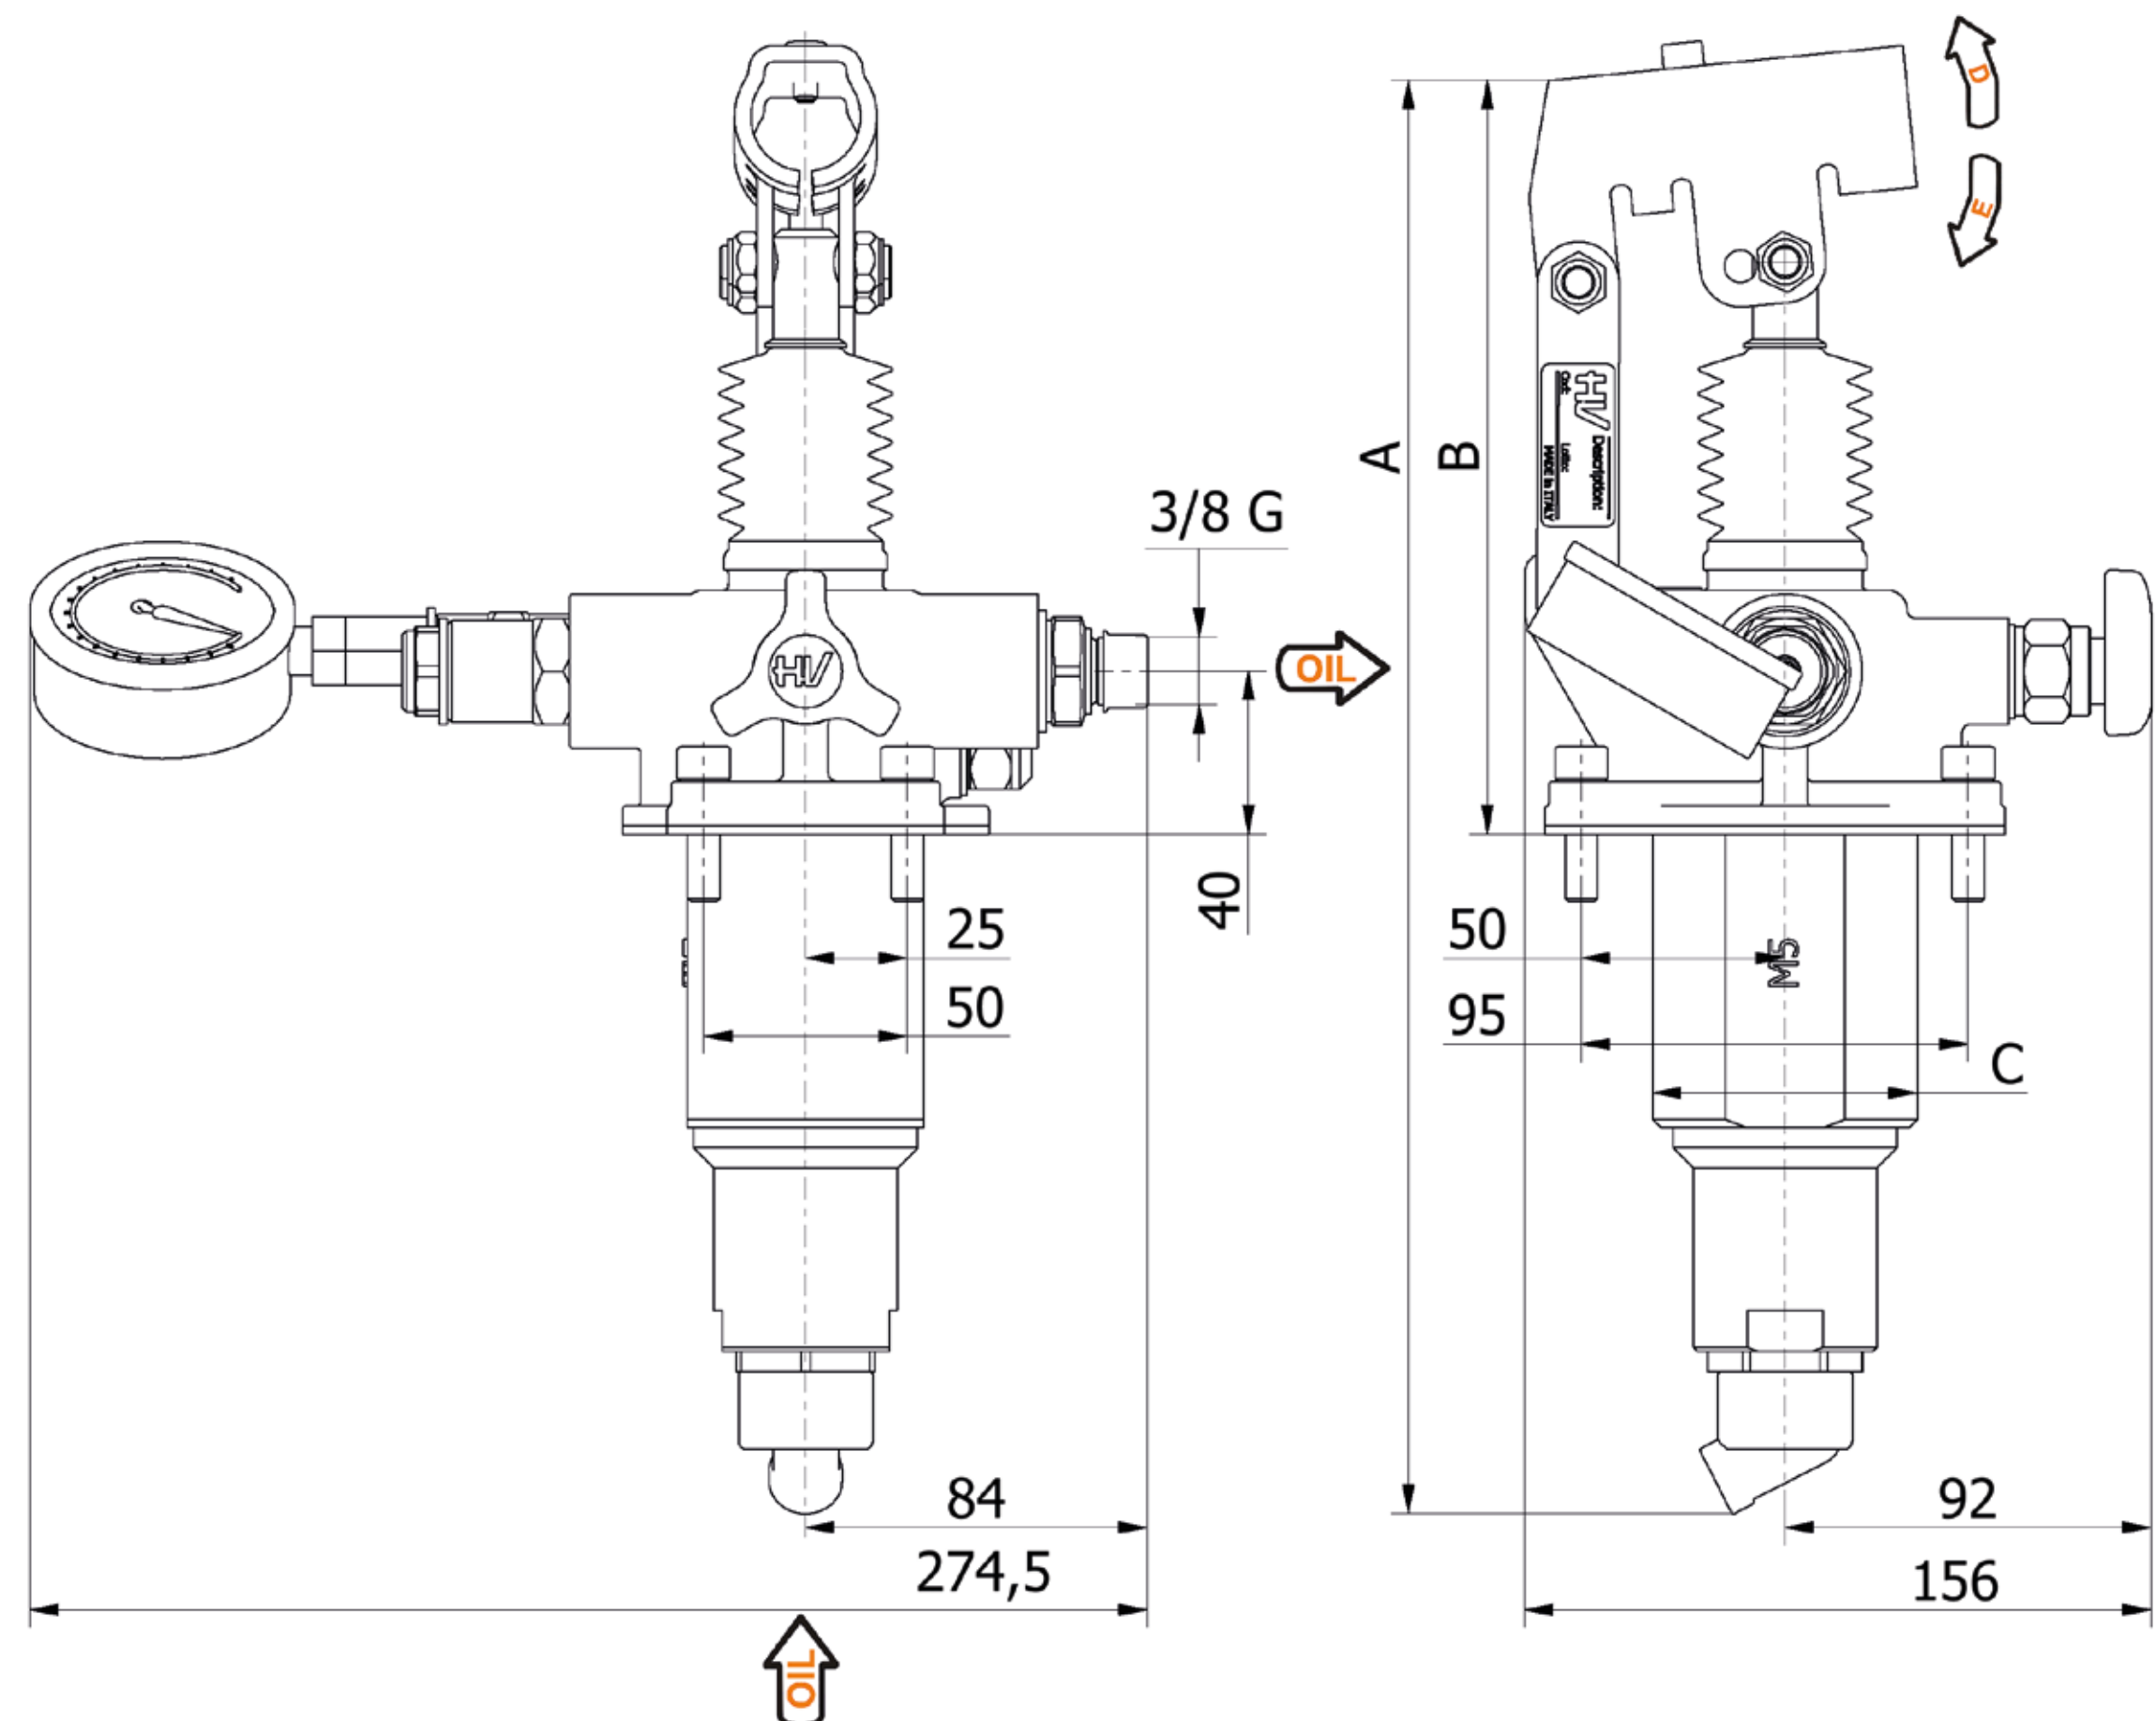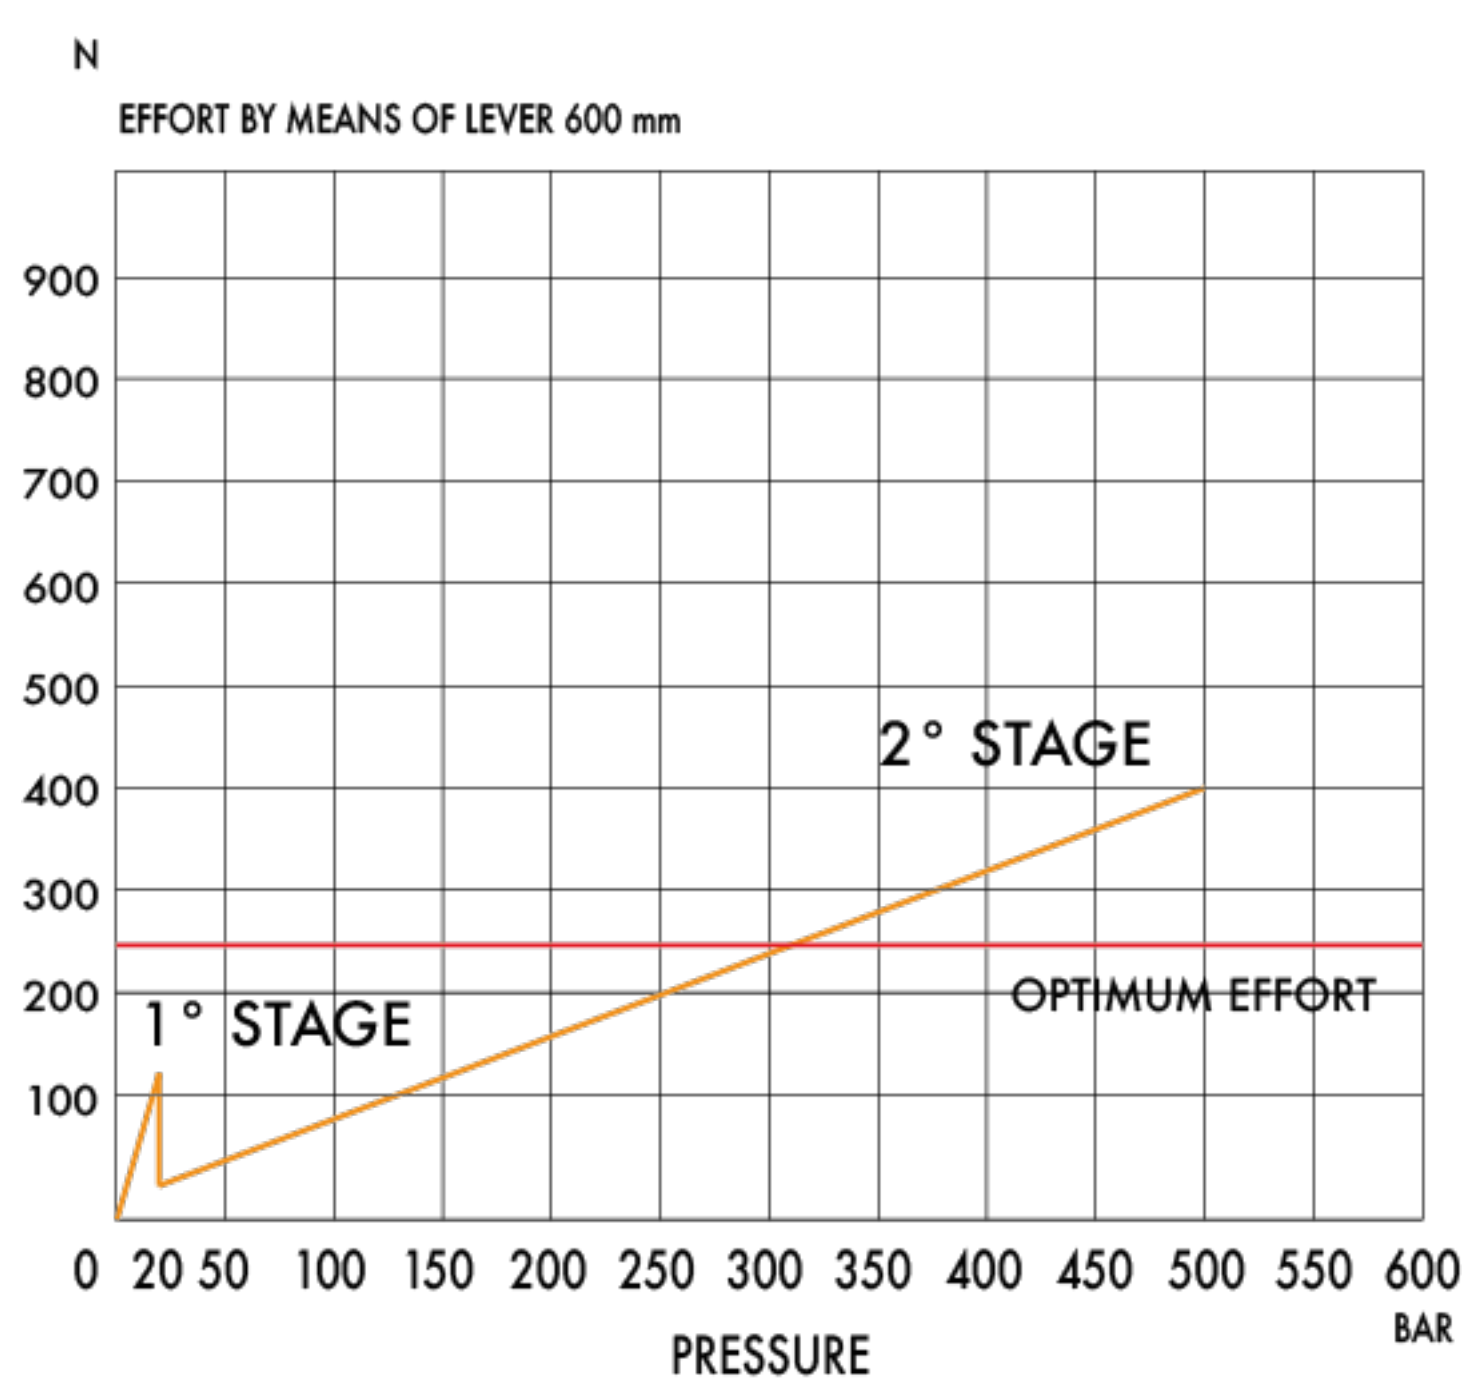[illegible]