

Hand pumps

PM2V 5-50 a-vb-byB

Tech sheet



DETAILS

with release hand knob
with automatic control for the 1st speed
with pressure relief valve and pressure-gauge two speed
hand pump for a single acting cylinder for fixing to tank



SPECIFICATIONS

Yellow zinc plating + sealant 15 micron external parts
Piston treated with Niploy
Lever connection Ø 20
Pressure relief valve standard
setting: 280 bar
Oil tank mounting kit included

HYDRAULIC DIAGRAM

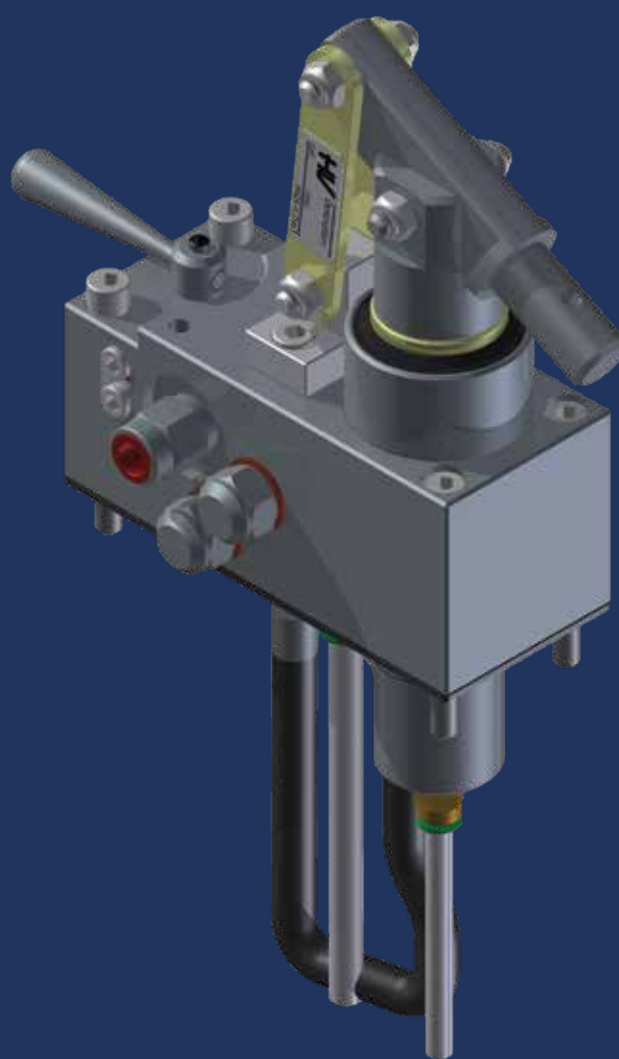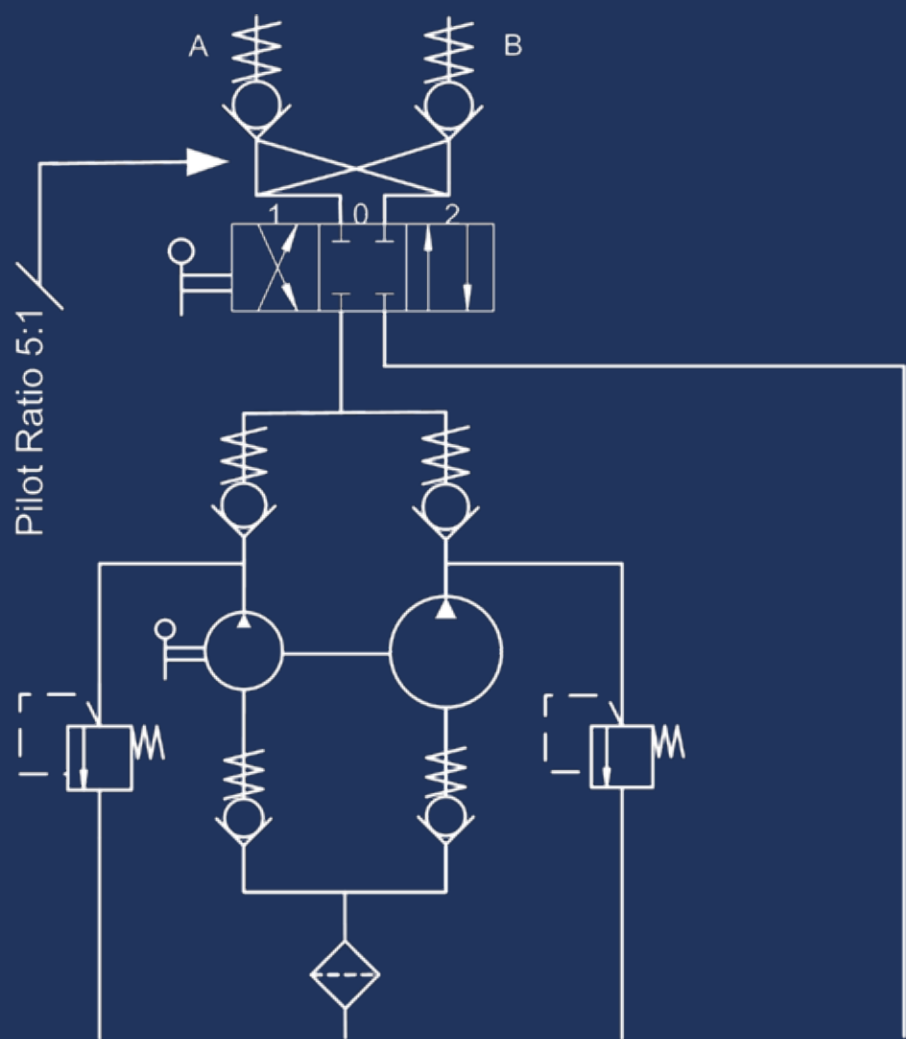

EFFORT DIAGRAM

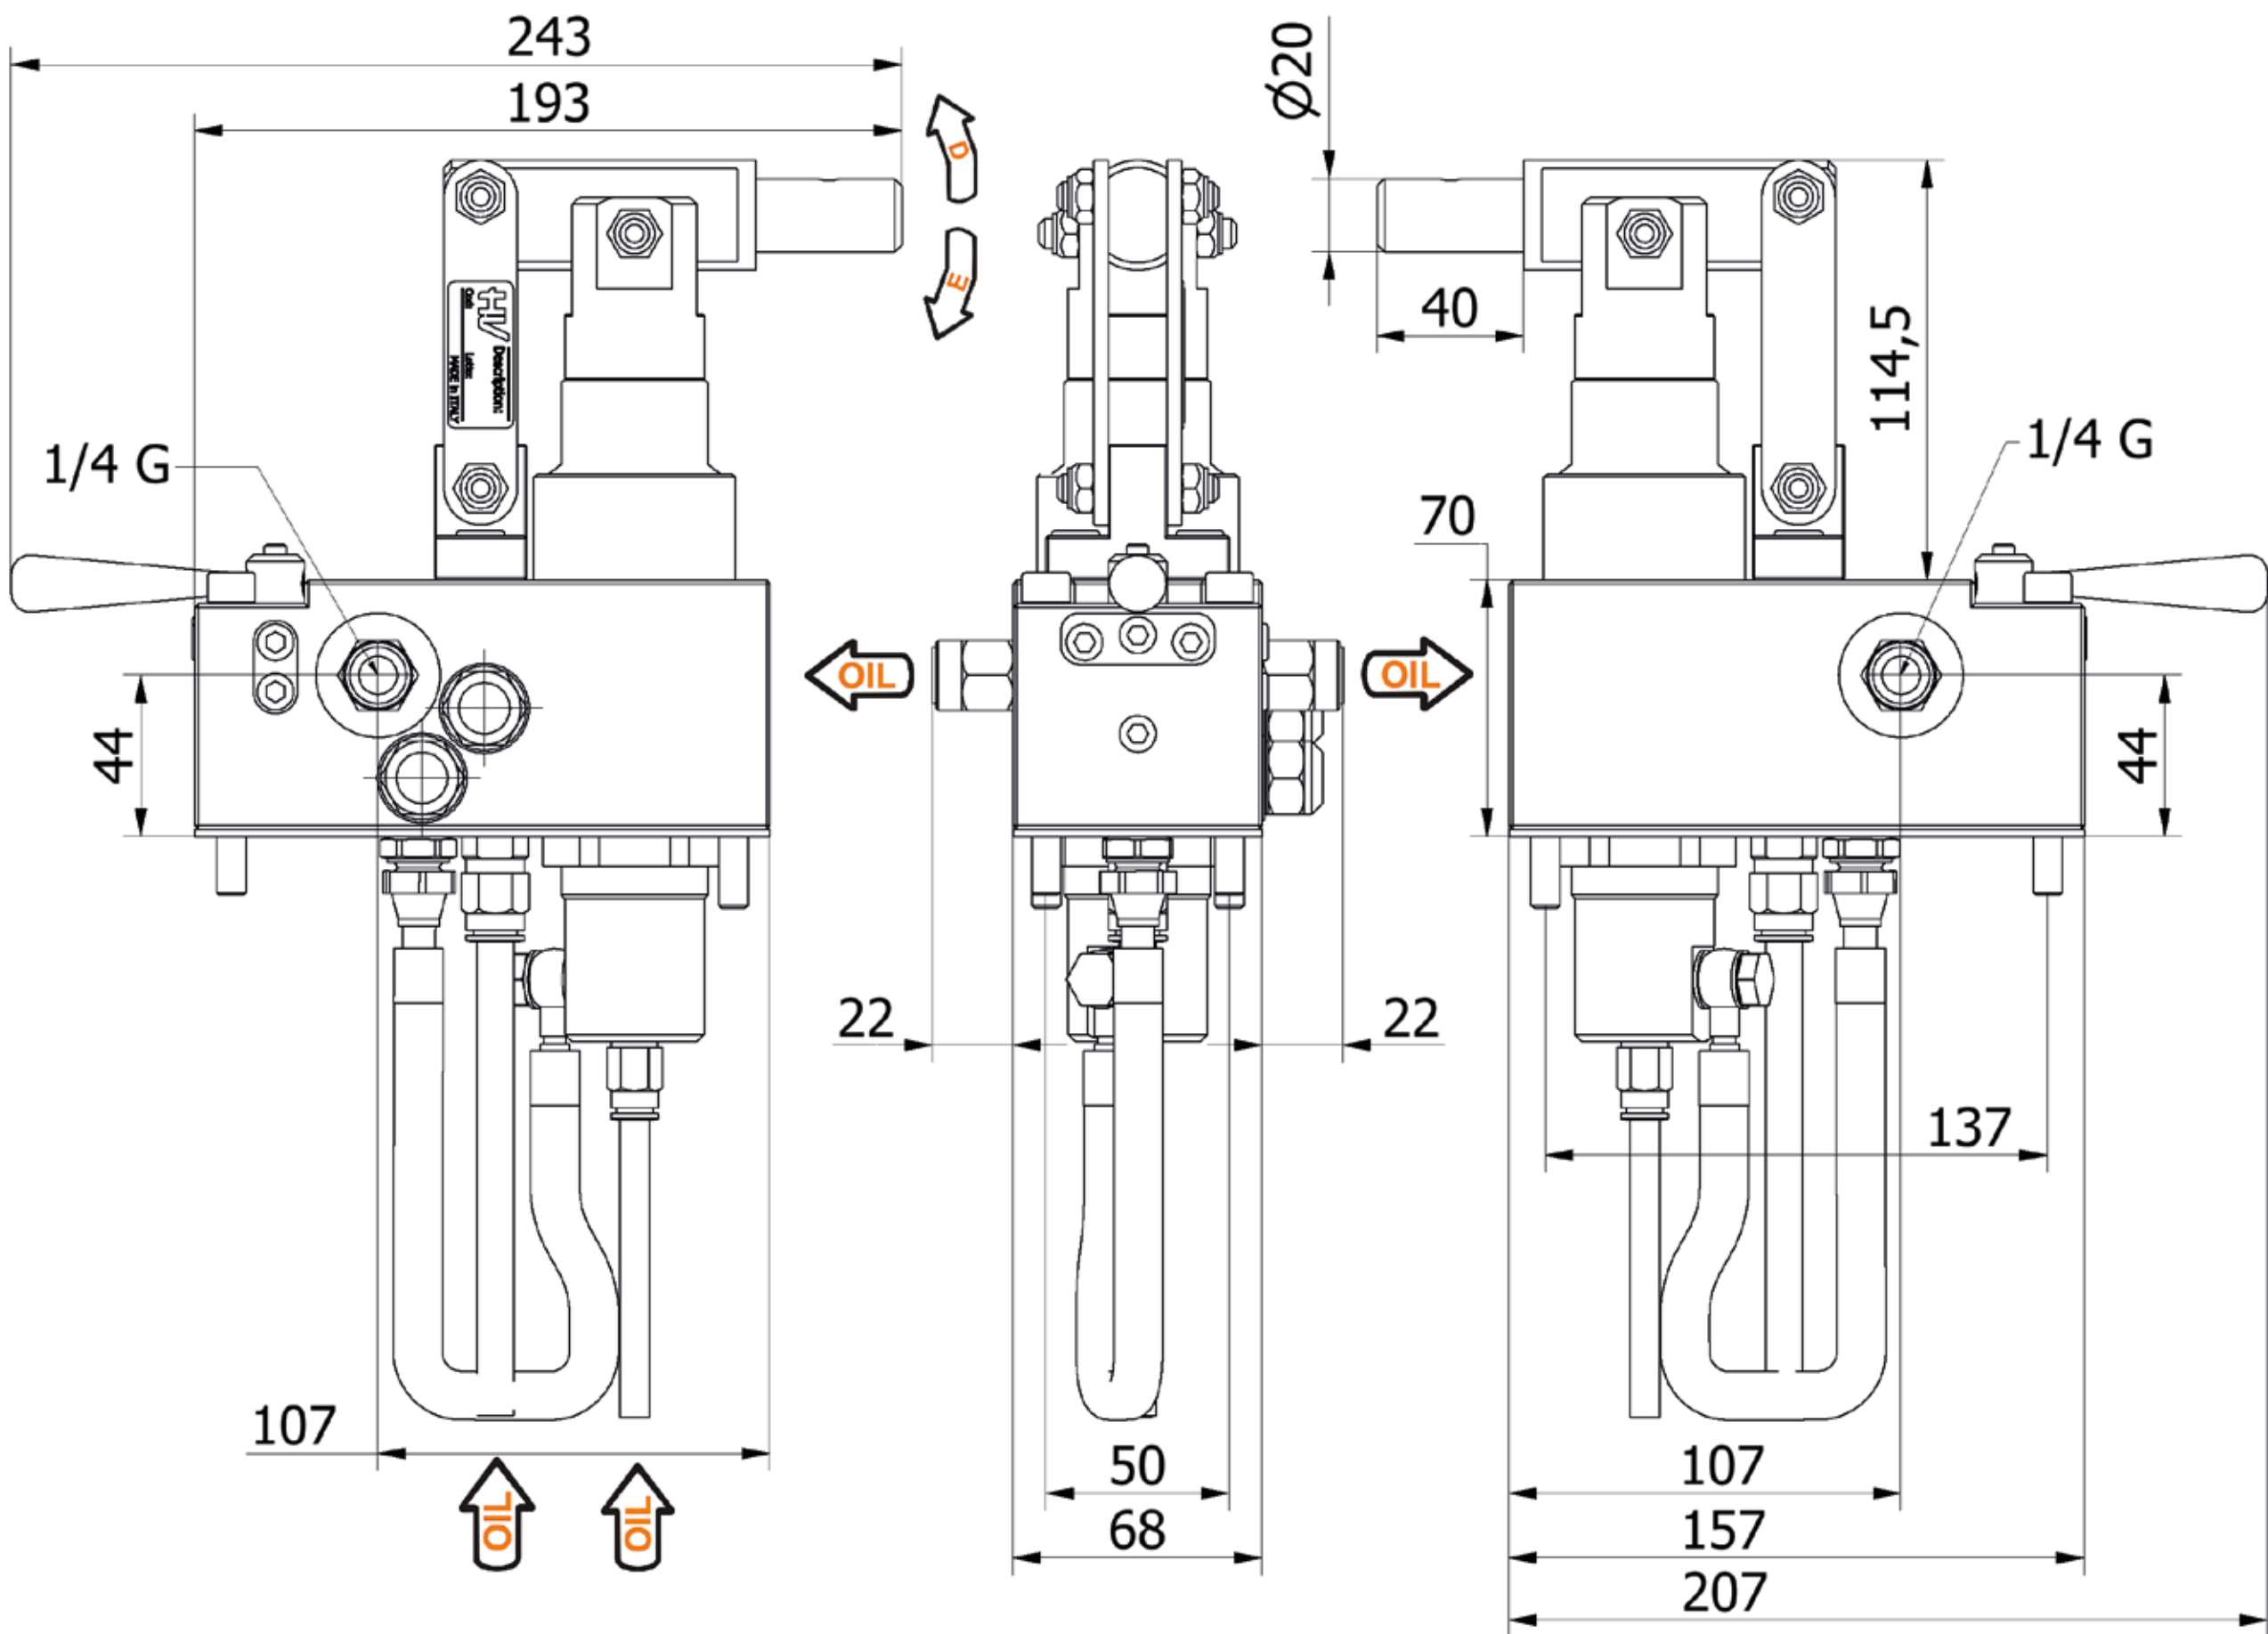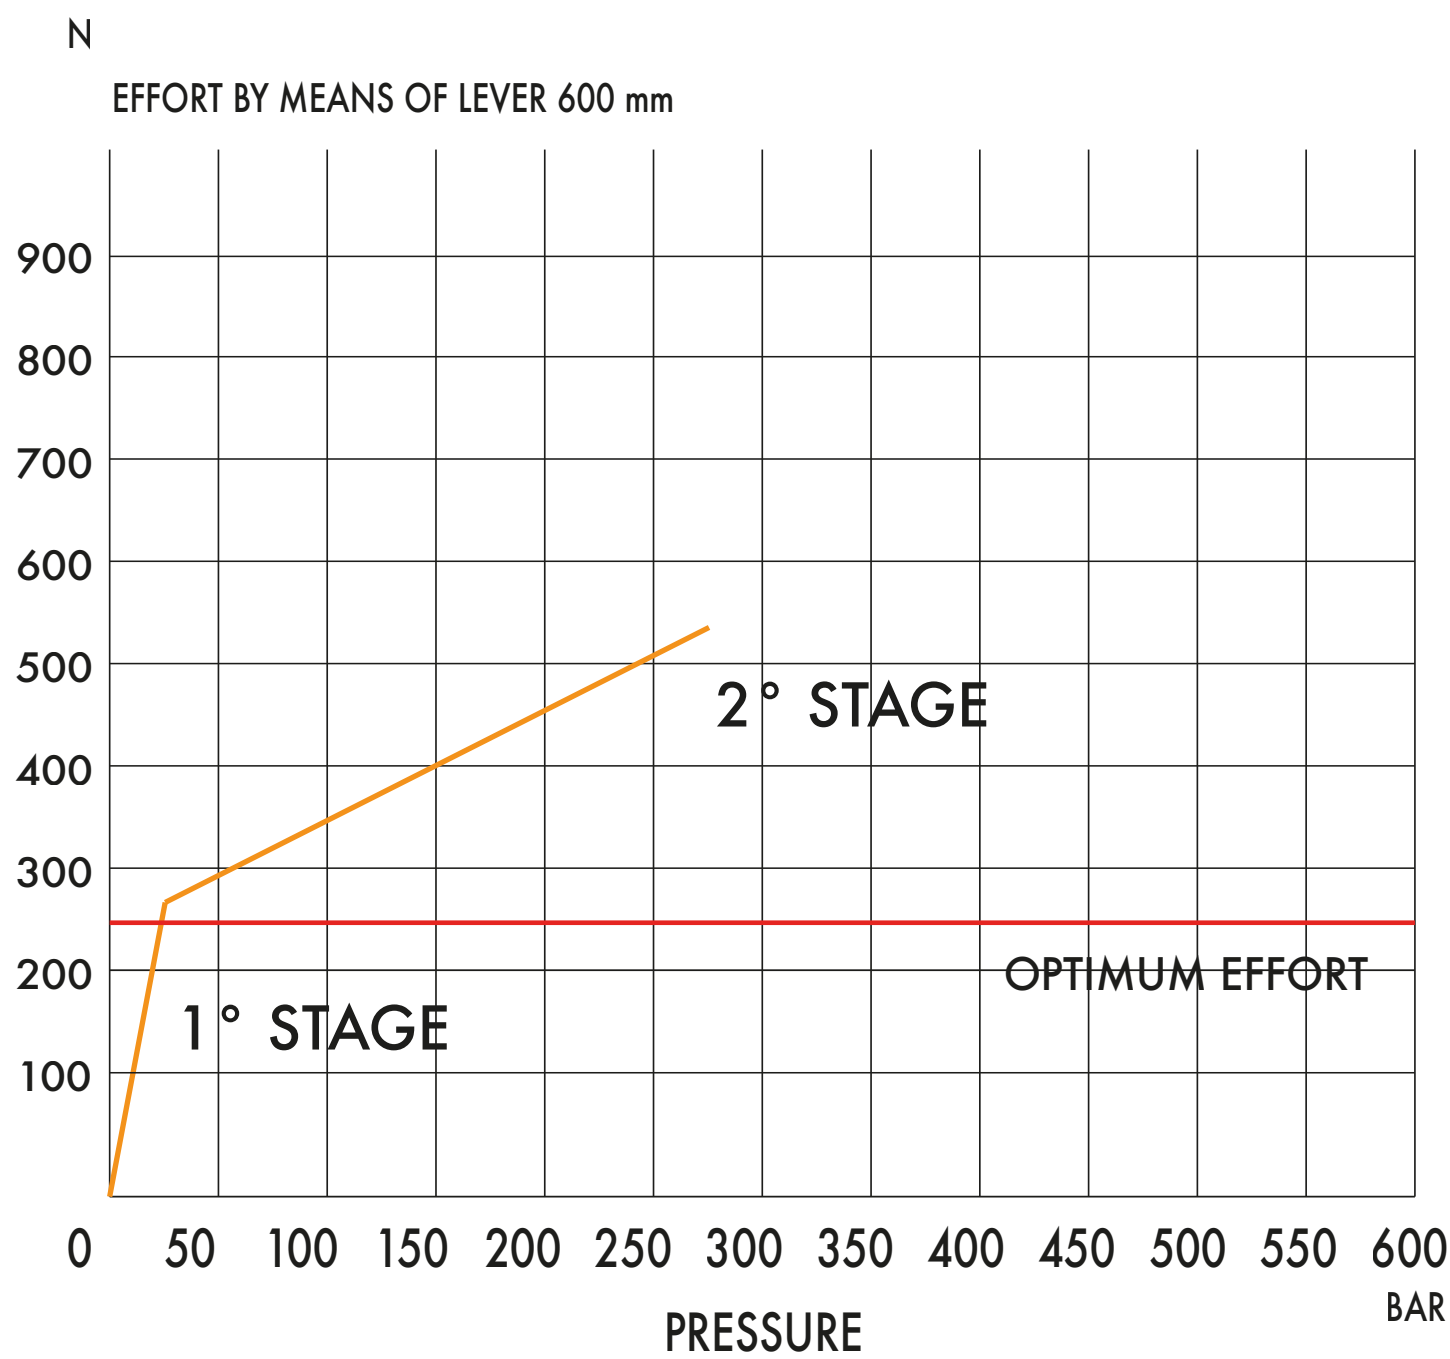

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	DISPLACEMENT cm ³		PRESSURE BAR		MASS KG	CODE
						STAGE 1	STAGE 2	STAGE 1	STAGE 2		
5-50	- -	- -	- -	29	27	50,200	5,300	30	280	7,578	6070.6040