



## FEATURES

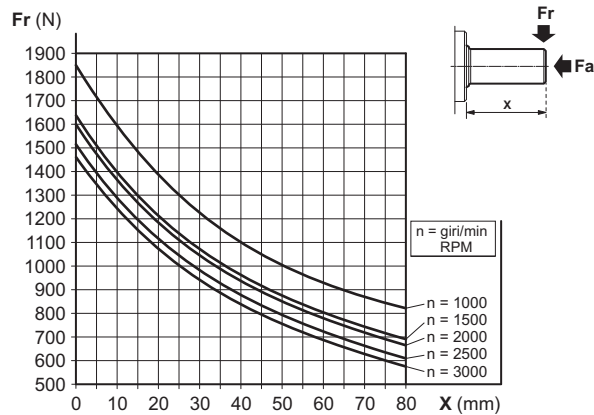

|                             |                         |
|-----------------------------|-------------------------|
| Minimum radial load (*)     | Fr = 130 N              |
| Radial load (*)             | See graphic             |
| Axial load (*)              | Fa ≤ Fr • 0,8           |
| Max. revolutions per minute | 4000 RPM                |
| Life (*)                    | 3500 hours              |
| Max. working temperature    | 70 °C                   |
| Grease quantity             | 10 ÷ 12 gr              |
| Type of grease              | DIN 51818 NLGI classe 2 |

(\*) Nominal values calculated according to ISO 281. For more information, contact our technical department.

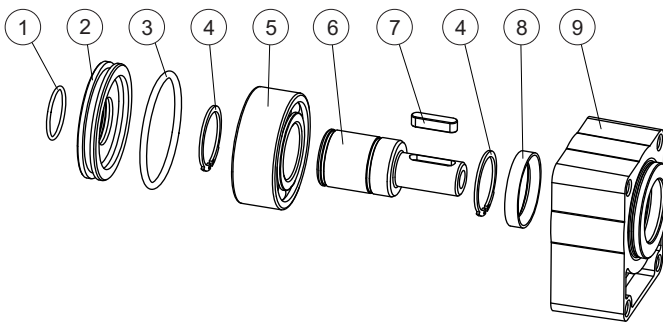

## SPARE PARTS

| Ref. | Code             | Description             | Q.ty |
|------|------------------|-------------------------|------|
| 1    | <b>Q25830030</b> | O-Ring 25.12x1.78       | 1    |
| 2    | <b>39000500</b>  | Cover                   | 1    |
| 3    | <b>Q25830215</b> | O-Ring 55.56x3.53       | 1    |
| 4    | <b>Q27150300</b> | Snap ring E30           | 2    |
| 5    | <b>44005200</b>  | Bearing 3206 30x62x23.8 | 1    |
| 6    | <b>34200400</b>  | Cylindrical shaft       | 1    |
| 7    | <b>Q27470206</b> | Woodruff A6x6x25        | 1    |
| 8    | <b>44101800</b>  | Shaft seal 30x40x7      | 1    |
| 9    | <b>39000400</b>  | Body                    | 1    |

**ORDERING CODE**