


CDL106... STACKABLE CIRCUIT SELECTOR VALVES

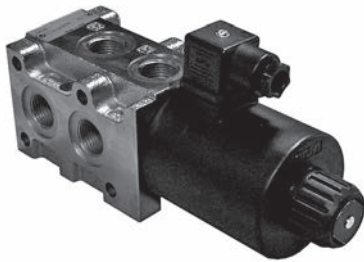

The stackable circuit selector valves, type CDL.10.6, allows one single drive of 6 users with 5 elements connected in series.

As they are moved from high performances solenoids they don't need the external drainage.

This valves can manage high hydraulic powers with a minimal pressure drop.

Max. pressure	250 bar
Max. flow	80 l/min
Overlap	negative
Hydraulic fluids	Mineral oils DIN 51524
Fluid viscosity	10 ÷ 500 mm²/s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level	class 10 in accordance NAS with 1638 with filter β_{25}^{375} see "Overall dimension"
Weight	

CDL106...

"A16" DC Coils	CAP. I • 74
CONNECTORS STANDARD	CAP. I • 20

ORDERING CODE

CDL

Stackable circuit selector valve

10

Size NG10

6

No. of way
(single element)

W = Threaded connectors 1/2" BSP
U = Threaded connectors SAE 10 7/8"-14 UNF

I

Internal drainage

No. of elements: **1 / 2 / 3 / 4 / 5**

Voltage (Tab. 1)

Variants (Tab. 2)

1

Serial No.

TAB.1 - A16 COIL

DC VOLTAGE **

L	12V	
M	24V	
N	48V*	115Vac/50Hz 120Vac/60Hz with rectifier
P	110V*	
Z	102V*	230Vac/50Hz 240Vac/60Hz with rectifier
X	205V*	
W	Without DC coil	

Voltage codes are not stamped on the plate, they are readable on the coils.

* Special voltage

** Technical data see CAP. I • 74

TAB.2 - VARIANTS


No variant (without connectors)	S1(*)
Viton	SV(*)
Emergency button	ES(*)
Rotary emergency button	P2(*)

Other variants available on request.


(*) Coils with Hirschmann connection supplied without connectors. The connectors can be ordered separately, CAP. I • 20.

HYDRAULIC SYMBOLS


SINGLE ELEMENT



MULTISTATION CONNECTION

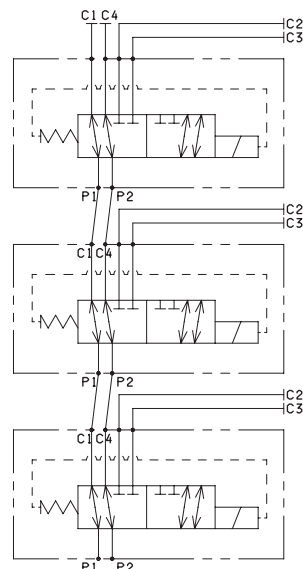

PRESSURE DROPS




— P1 → C1, P1 → C2,
P2 → C3 e P2 → C4

The fluid used is a mineral oil with a viscosity of 46 mm²/s at 40°C; the tests have been carried out at a fluid temperature of 40°C.

Fixing screws UNI 5931 M6x60
with material specifications min. 8.8
Tightening torque for studs 8 Nm / 0.8 Kg
Tightening torque for rods 20 Nm / 2 Kg

OVERALL DIMENSIONS

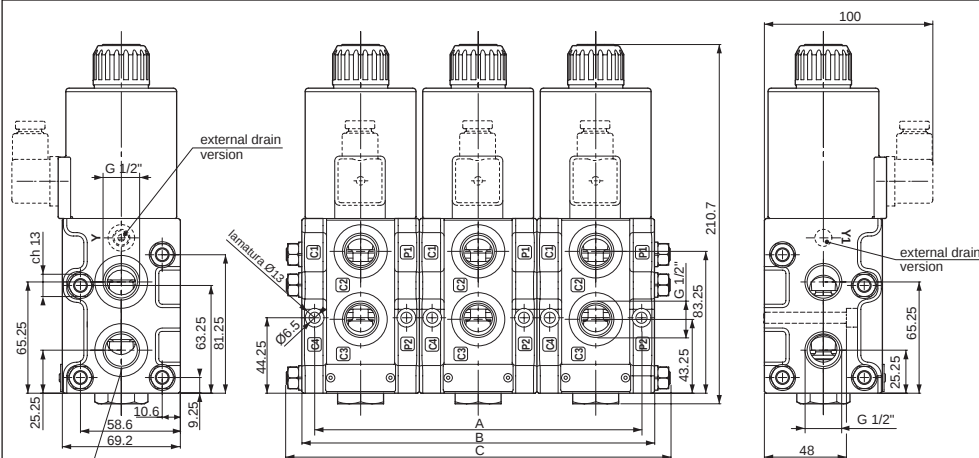

N. 2 O-ring
1/2" BSP: 2-024
SAE107/8"-14 UNF: 2-025

No. of elements	No. of way	A	B	C	Weight (Kg)	Kit spare part code* (rods and studs)
1	06	54	69	-	4,5	/
2	08	123	138	160	9,3	V89.56.0001
3	10	192	207	226	14	V89.56.0002
4	12	261	276	296	18,5	V89.56.0003
5	14	330	345	365	23,3	V89.56.0004

(*) For multiple composition rods and studs are available.