



GROUP2 REVERSIBLE MOTORS - EUROPEAN STANDARD

VERSION: G28 P2

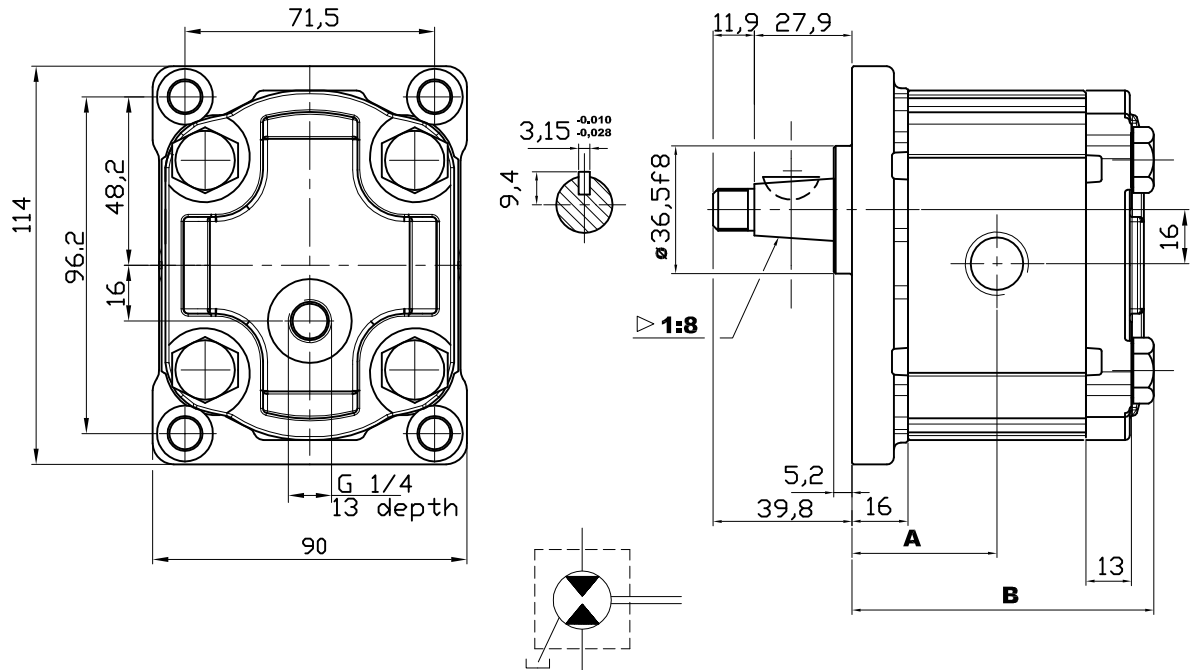

Type	Displacement (cc/rev)	Max working pressure P1 (bar)	Peak pressure P3 (bar)	Max speed (r.p.m)	Dimension		Inlet port		Outlet port	
					A	B	e	d	e	d
					(mm)					
OT 200 P04	04,10	210	240	4000	40,00	83,50	G1/2	14	G1/2	14
OT 200 P06	06,20	220	255	3500	41,50	86,50	G1/2	14	G1/2	14
OT 200 P08	08,20	220	255	3500	43,00	89,50	G1/2	14	G1/2	14
OT 200 P11	11,20	220	255	3500	45,15	93,80	G1/2	14	G1/2	14
OT 200 P14	14,00	220	255	3000	47,15	97,80	G3/4	16	G3/4	16
OT 200 P16	16,00	220	255	3000	48,60	100,7	G3/4	16	G3/4	16
OT 200 P20	20,00	200	240	3000	51,50	106,5	G3/4	16	G3/4	16
OT 200 P22	22,50	170	210	2500	57,35	118,2	G3/4	16	G3/4	16
OT 200 P25	25,10	170	180	2500	59,25	122,0	G3/4	16	G3/4	16
OT 200 P28	28,00	140	180	2500	61,35	126,2	G3/4	16	G3/4	16
OT 200 P30	30,00	130	170	2000	62,75	129,0	G3/4	16	G3/4	16



EXAMPLE OF ORDERING CODE

OT200 M 08 R / G 28 P2

Series

Motor

Displacement (see above table)

Rotation

R Reversible

European standard flange

Taper shaft (1:8)

Body with threaded ports (BSP)