

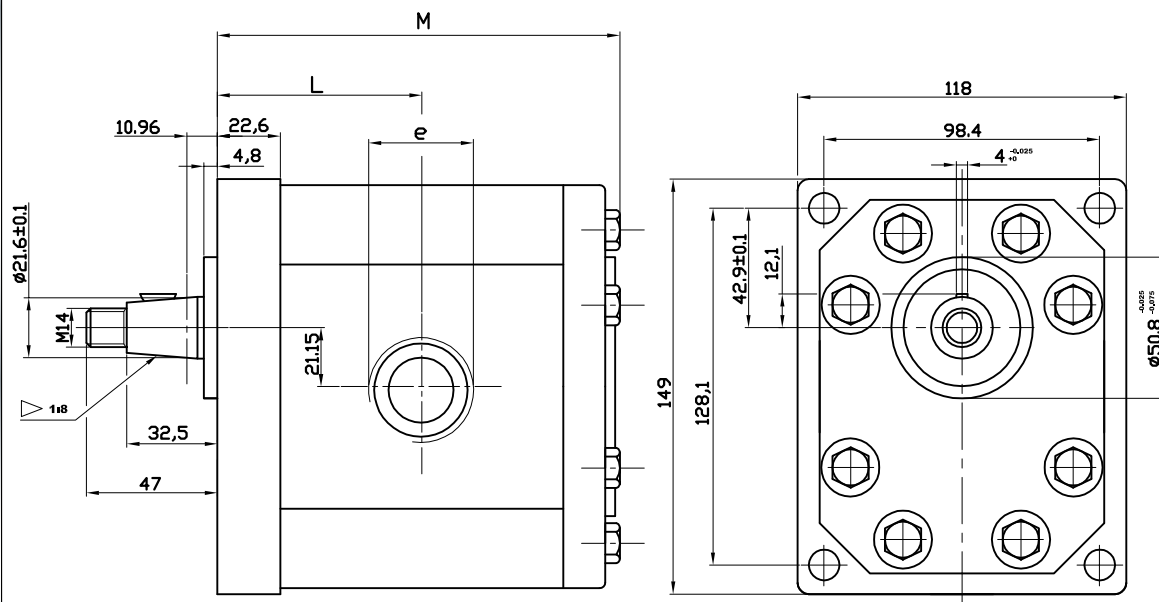


GROUP 3 PUMPS- EUROPEAN STANDARD

VERSION: G38 P3



Type	Displacement (cc/rev)	Max working pressure P1 (bar)	Peak pressure P3 (bar)	Max speed (r.p.m)	Dimension		Inlet port e	Outlet port e
					L	M		
					(mm)			
OT 303 P20	20	220	250	2500	56,1	116,7	G3/4	G3/4
OT 303 P22	22	220	250	2500	57,6	119,7	G3/4	G3/4
OT 303 P25	25	220	250	2500	58,3	121,1	G3/4	G3/4
OT 303 P28	28	220	250	2500	60,2	124,7	G1	G3/4
OT 303 P32	32	220	250	2500	66,5	137,3	G1	G3/4
OT 303 P36	36	220	250	2300	68,0	140,5	G1	G3/4
OT 303 P42	42	200	230	2300	70,8	146,1	G1	G3/4
OT 303 P46	46	200	230	2100	72,7	149,8	G1	G3/4
OT 303 P50	50	170	200	2100	74,5	153,4	G1	G3/4
OT 303 P55	55	170	200	1800	76,7	157,9	G1	G3/4
OT 303 P60	60	150	180	1800	78,7	162,4	G1	G3/4



EXAMPLE OF ORDERING CODE

OT303 P 28 S / G 38 P3

Series

Pump

Displacement (see above table)

Rotation

S Anti-clockwise
D Clockwise

European standard flange

Taper shaft (1:8)

Body with threaded ports (BSP)