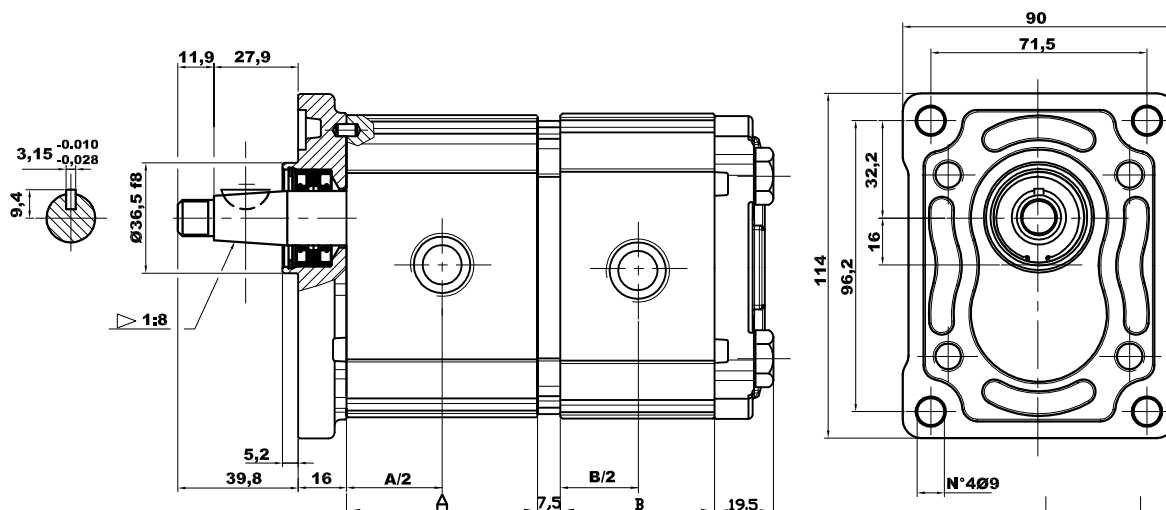



GROUP 2 PUMPS- TANDEM
VERSION: G28 P2


NOTE: The biggest displacement pump must be in the front position

Type	Displacement (cc/rev)	Max working pressure P1 (bar)	Peak pressure P3 (bar)	Max speed (r.p.m)	Dimension A B		Inlet port		Outlet port	
					(mm)	(mm)	e	d	e	d
OT 200 P04	04,10	250	300	4000	48,00	48,00	G1/2	14	G1/2	14
OT 200 P06	06,20	250	300	3500	51,00	51,00	G1/2	14	G1/2	14
OT 200 P08	08,20	250	300	3500	54,00	54,00	G1/2	14	G1/2	14
OT 200 P11	11,20	250	300	3500	58,30	58,30	G1/2	14	G1/2	14
OT 200 P12	12,50	240	300	3500	60,20	60,20	G3/4	16	G1/2	14
OT 200 P14	14,00	240	300	3000	62,30	62,30	G3/4	16	G1/2	14
OT 200 P16	16,00	240	300	3000	65,20	65,20	G3/4	16	G1/2	14
OT 200 P20	20,00	200	240	3000	71,00	71,00	G3/4	16	G1/2	14
OT 200 P22	22,50	170	210	2500	82,70	82,70	G3/4	16	G1/2	14
OT 200 P25	25,10	170	210	2500	86,50	86,50	G3/4	16	G1/2	14
OT 200 P28	28,00	140	180	2500	90,70	90,70	G3/4	16	G1/2	14
OT 200 P30	30,00	130	170	2000	93,50	93,50	G3/4	16	G1/2	14


EXAMPLE OF ORDERING CODE
OT200 P 16 / 06 S / G 28 P2 / 2

Series

Pump

Front pump displacement
(see above table)

Second pump displacement
(see above table)

Rotation

S Anti-clockwise
D Clockwise

1 = One suction port
2 = Two suction ports

European standard flange

Taper shaft (1:8)

Body with threaded ports
(BSP)

AVAILABLE FOR QUANTITIES